



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[8444]**  
 Machine Id  
**115 SCARSDALE RD, TORONTO UNIT 2 5272011232 5272011232**  
 Component  
**Left Diesel Engine**  
 Fluid  
**ESSO XD-3 EXTRA 15W40 (300 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid. this testkit includes BN to determine the suitability of the oil for continued use.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PN0005828</b>	PN0004378	PN0003266
Sample Date		Client Info		<b>15 Feb 2024</b>	17 Feb 2023	14 Feb 2022
Machine Age	hrs	Client Info		<b>861</b>	773	705
Oil Age	hrs	Client Info		<b>89</b>	0	113
Filter Age	hrs	Client Info		<b>89</b>	67	113
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Metal levels are typical for a new component breaking in. Component wear rates appear to be normal (unconfirmed).

Iron	ppm	ASTM D5185(m)	>100	<b>3</b>	5	4
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	3	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>1</b>	2	2
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	4	4
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.2</b>	9.1	9.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.1</b>	20.9	20.9
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service (unconfirmed).

Sodium	ppm	ASTM D5185(m)	>192	<b>2</b>	3	3
Boron	ppm	ASTM D5185(m)		<b>116</b>	59	64
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>82</b>	93	85
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)		<b>560</b>	90	128
Calcium	ppm	ASTM D5185(m)	3780	<b>1692</b>	2518	2185
Phosphorus	ppm	ASTM D5185(m)	1370	<b>961</b>	1186	1063
Zinc	ppm	ASTM D5185(m)	1500	<b>1083</b>	1259	1242
Sulfur	ppm	ASTM D5185(m)	3800	<b>2873</b>	3391	3271
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.2</b>	15.4	17.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.1</b>	14.4	14.3

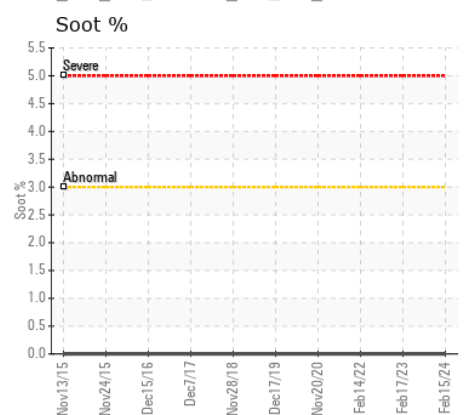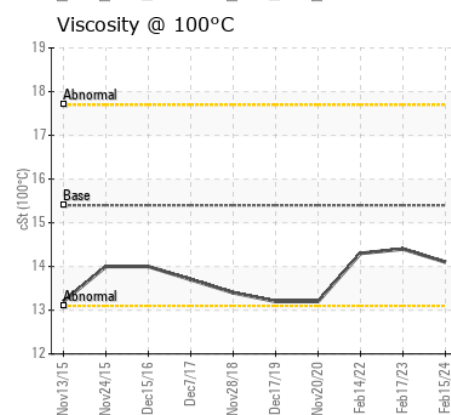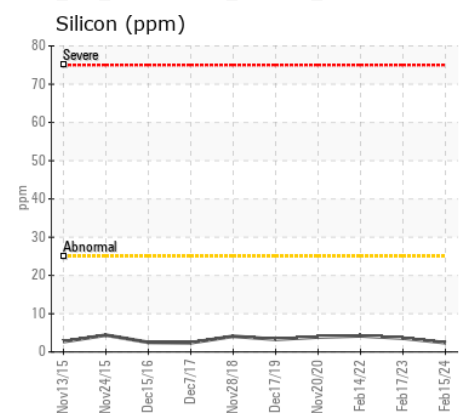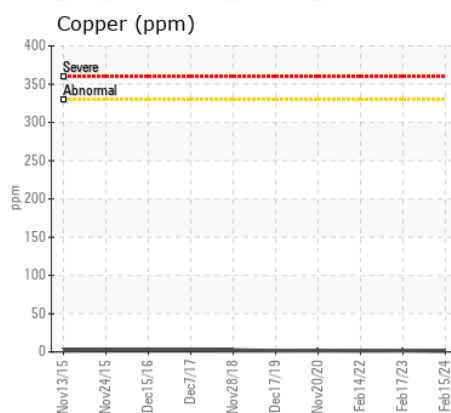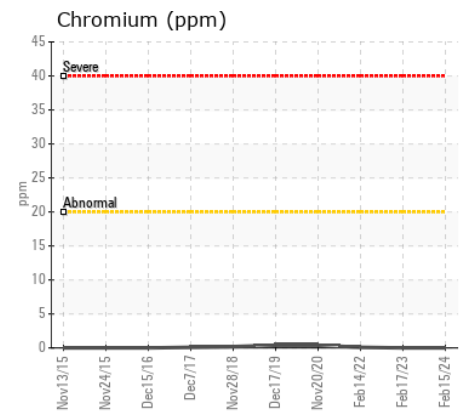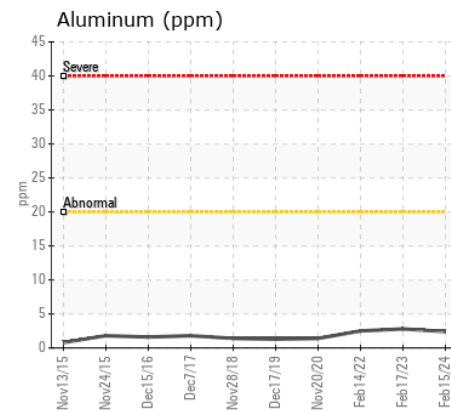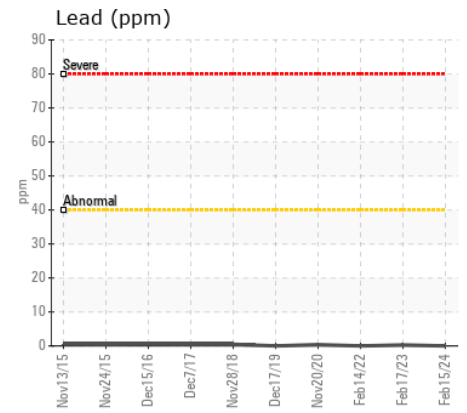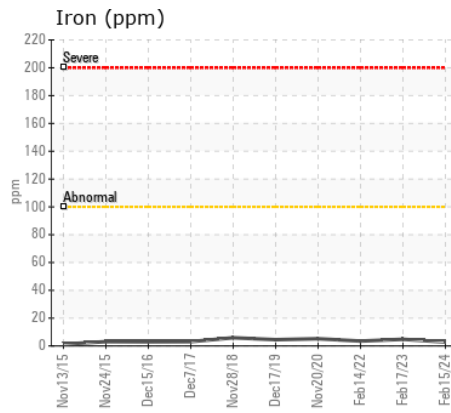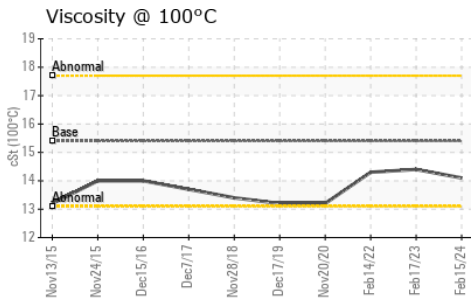

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PN0005828 **Received** : 21 Feb 2024  
**Lab Number** : 02616979 **Tested** : 22 Feb 2024  
**Unique Number** : 5734089 **Diagnosed** : 22 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**POWER STATION INC.**  
 1050 JAYSON COURT  
 MISSISSAUGA, ON  
 CA L4W 2V5  
 Contact: Brett Kinkley  
 Bkinkley@pwrstn.com  
 T:  
 F: (905)665-8544

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.