



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
801089
 Component
Transmission (Auto)
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.

CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION










L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096674	GFL0080352	GFL0077168
Sample Date		Client Info		24 Jan 2024	18 Sep 2023	06 Apr 2023
Machine Age	kms	Client Info		358567	304434	276312
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>160	69	33	3
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>50	19	7	<1
Lead	ppm	ASTM D5185(m)	>50	13	10	<1
Copper	ppm	ASTM D5185(m)	>225	17	7	<1
Tin	ppm	ASTM D5185(m)	>10	2	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>20	11	7	4
Potassium	ppm	ASTM D5185(m)	>20	3	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	.2%	NEG

Sodium	ppm	ASTM D5185(m)		50	45	9
Boron	ppm	ASTM D5185(m)		47	44	73
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		2	2	<1
Calcium	ppm	ASTM D5185(m)		127	124	129
Phosphorus	ppm	ASTM D5185(m)		206	197	231
Zinc	ppm	ASTM D5185(m)		10	9	3
Sulfur	ppm	ASTM D5185(m)		1385	1339	1540
Visc @ 40°C	cSt	ASTM D7279(m)		28.7	32.9	33.6

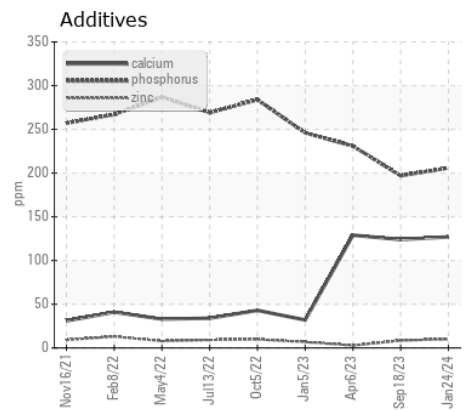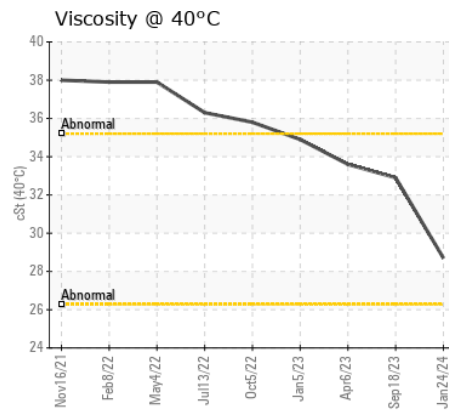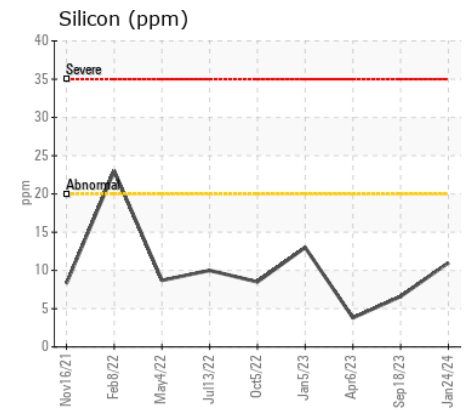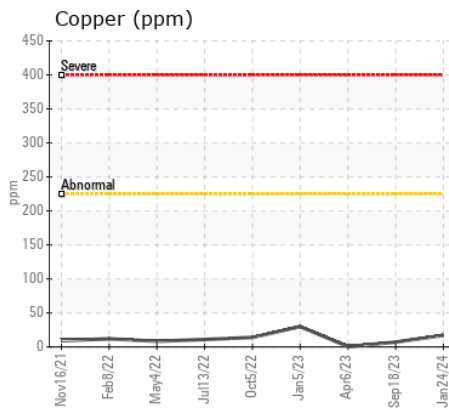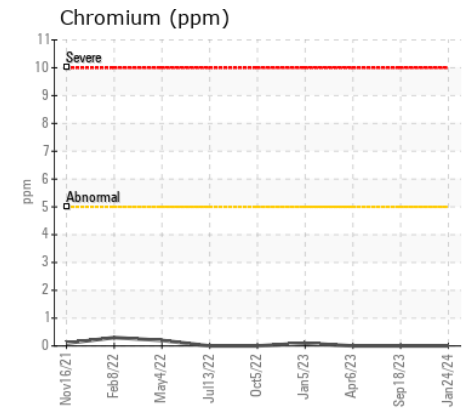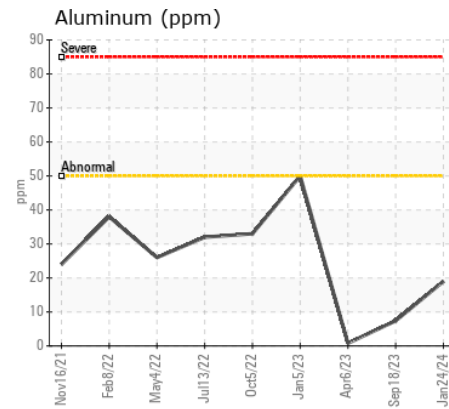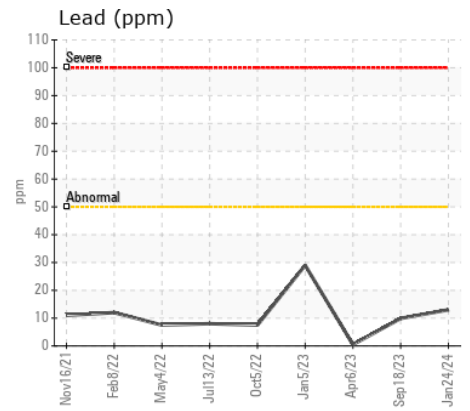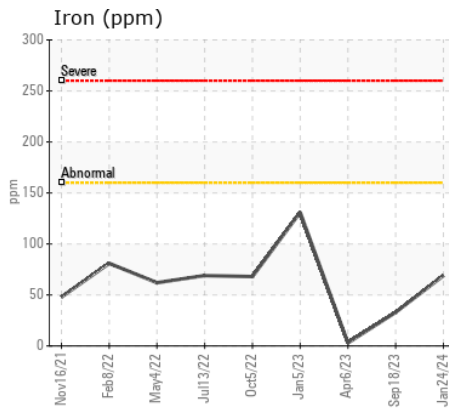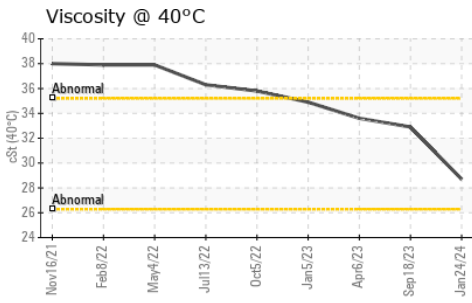

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096674
Lab Number : 02617152
Unique Number : 5734262
Test Package : MOB 1
Received : 21 Feb 2024
Tested : 22 Feb 2024
Diagnosed : 22 Feb 2024 - Wes Davis

GFL Environmental - 730 - Chicoutimi - Hauling
 3199 Boul. Talbot
 Chicoutimi, QC
 CA G7H 5B1
 Contact: Yan Houde
 yhoude@matrec.ca
 T: (418)549-8074
 F: (418)549-7973

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.