



Machine Id  
**811022**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

### RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

### WEAR

Les taux d'usure de tous les composants sont normaux.











### CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

### FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0096618</b>	GFL0080343	GFL0077172
Sample Date		Client Info		<b>28 Dec 2023</b>	02 Oct 2023	05 Apr 2023
Machine Age	hrs	Client Info		<b>179299</b>	171761	149195
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
Iron	ppm	ASTM D5185(m)	>220	<b>114</b>	101	64
Chromium	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>75	<b>35</b>	31	22
Lead	ppm	ASTM D5185(m)	>95	<b>20</b>	20	19
Copper	ppm	ASTM D5185(m)	>60	<b>26</b>	23	14
Tin	ppm	ASTM D5185(m)	>10	<b>4</b>	3	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>25	<b>9</b>	8	8
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	4	3
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>5</b>	6	4
Boron	ppm	ASTM D5185(m)		<b>74</b>	71	80
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Calcium	ppm	ASTM D5185(m)		<b>18</b>	17	16
Phosphorus	ppm	ASTM D5185(m)		<b>195</b>	186	214
Zinc	ppm	ASTM D5185(m)		<b>4</b>	4	3
Sulfur	ppm	ASTM D5185(m)		<b>1947</b>	1857	1931
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>30.1</b>	30.8	30.0

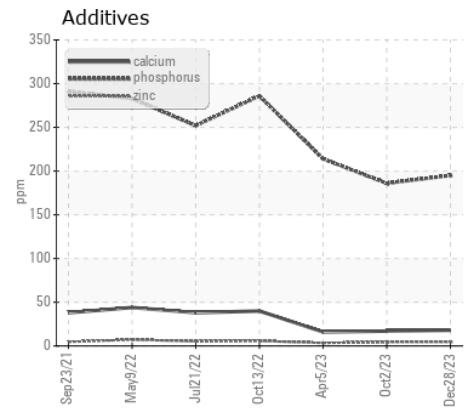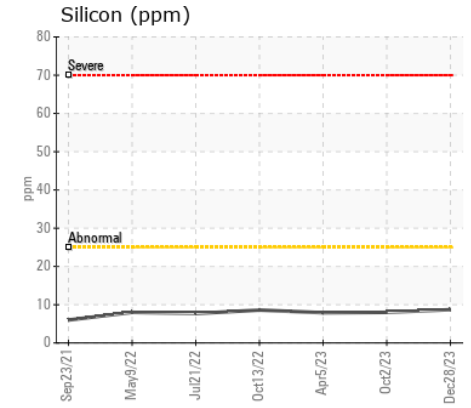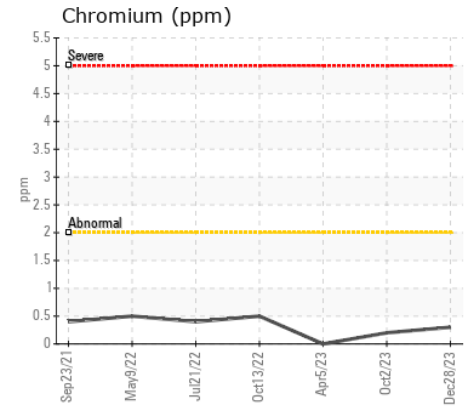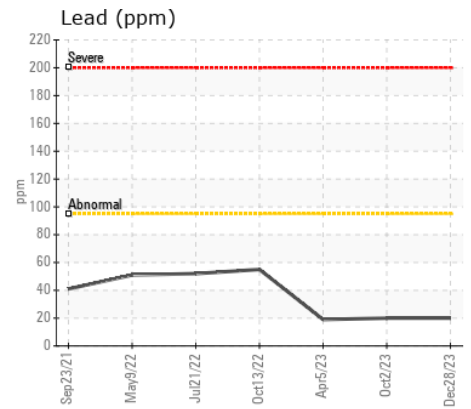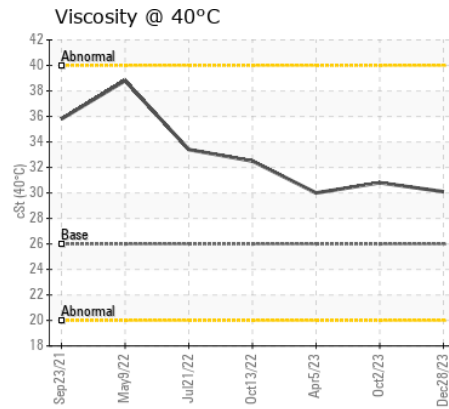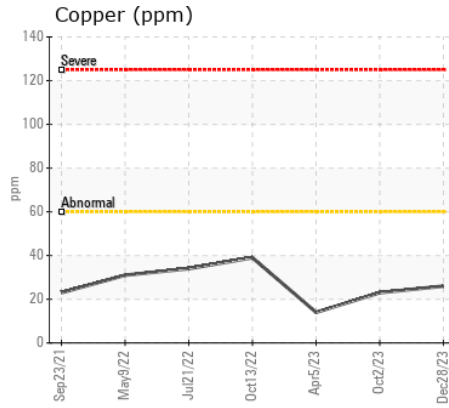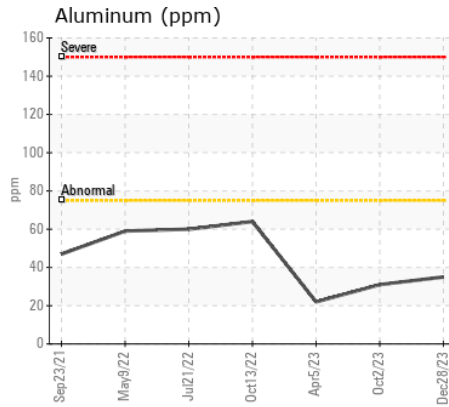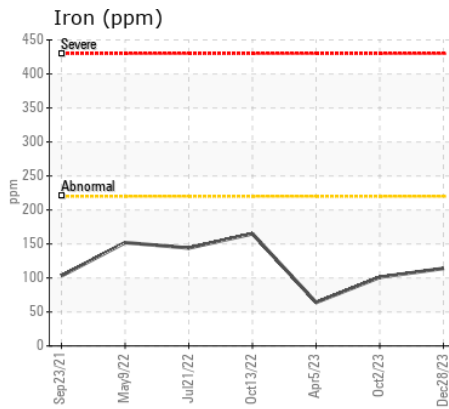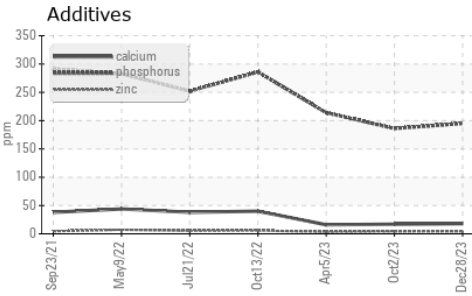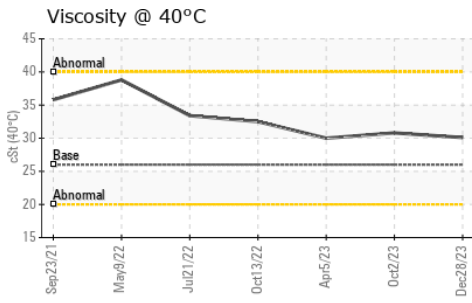

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0096618  
**Lab Number** : 02617163  
**Unique Number** : 5734273  
**Test Package** : MOB 1  
**Received** : 21 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Wes Davis

**GFL Environmental - 730 - Chicoutimi - Hauling**  
 3199 Boul. Talbot  
 Chicoutimi, QC  
 CA G7H 5B1  
 Contact: Yan Houde  
 yhoude@matrec.ca  
 T: (418)549-8074  
 F: (418)549-7973

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.