



Machine Id
813095
Component
Transmission (Auto)
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096623	GFL0096645	---
Sample Date		Client Info		09 Jan 2024	20 Oct 2023	---
Machine Age	kms	Client Info		42856	29260	---
Oil Age	kms	Client Info		0	0	---
Filter Age	kms	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>220	88	64	---
Chromium	ppm	ASTM D5185(m)	>2	<1	0	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>75	40	23	---
Lead	ppm	ASTM D5185(m)	>95	50	10	---
Copper	ppm	ASTM D5185(m)	>60	40	29	---
Tin	ppm	ASTM D5185(m)	>10	7	5	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>25	8	6	---
Potassium	ppm	ASTM D5185(m)	>20	5	3	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		6	6	---
Boron	ppm	ASTM D5185(m)		47	47	---
Barium	ppm	ASTM D5185(m)		<1	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		2	1	---
Magnesium	ppm	ASTM D5185(m)		1	1	---
Calcium	ppm	ASTM D5185(m)		122	120	---
Phosphorus	ppm	ASTM D5185(m)		201	196	---
Zinc	ppm	ASTM D5185(m)		5	5	---
Sulfur	ppm	ASTM D5185(m)		1521	1393	---
Visc @ 40°C	cSt	ASTM D7279(m)		29.1	32.6	---

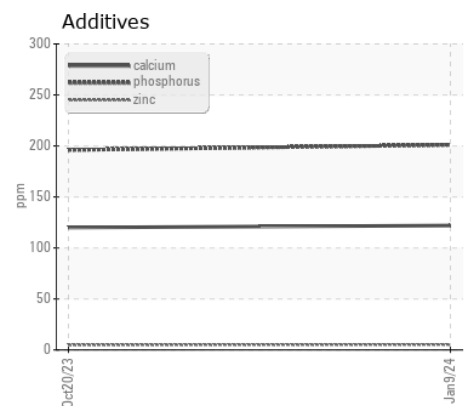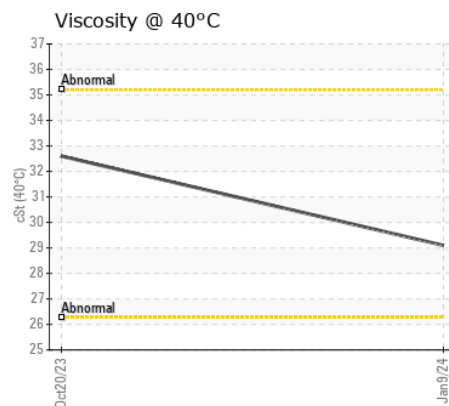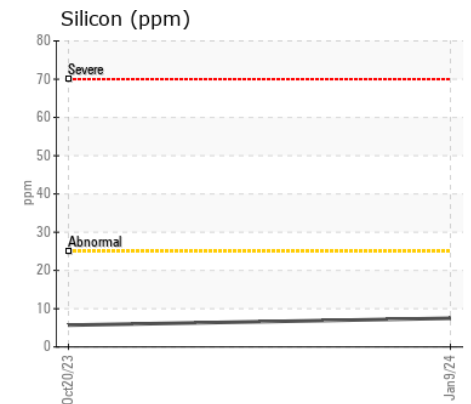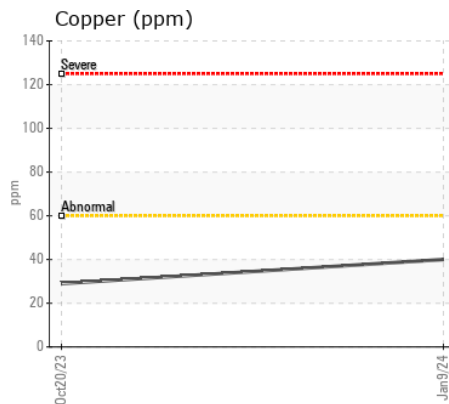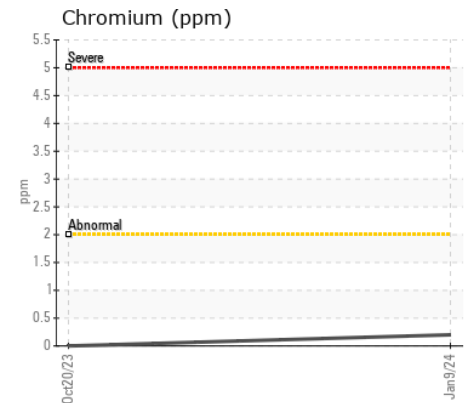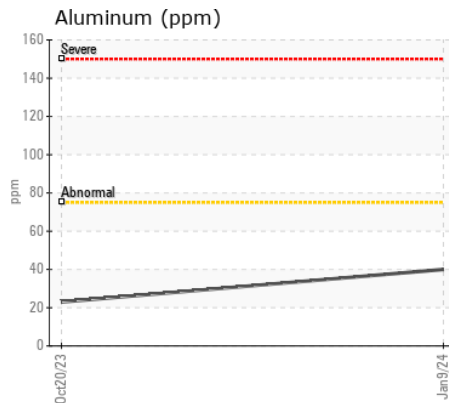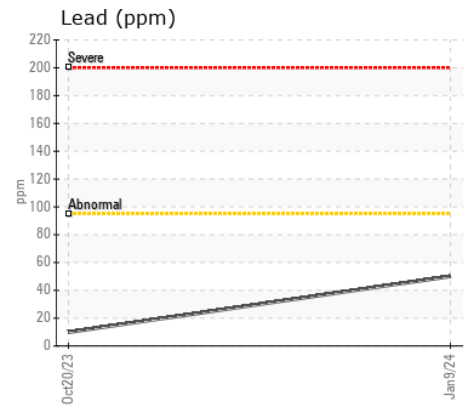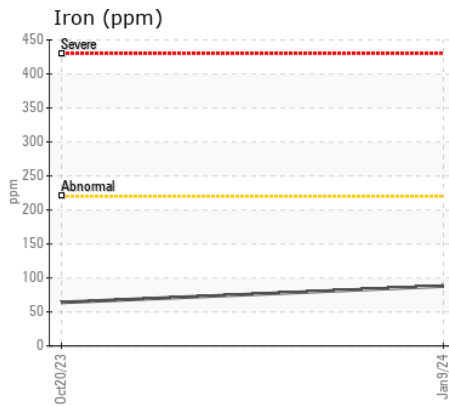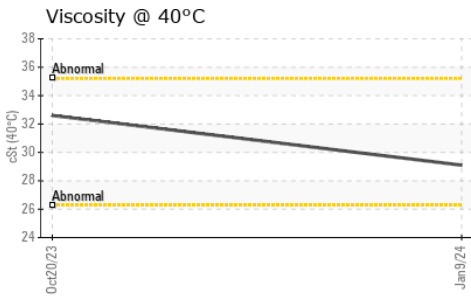

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096623
Lab Number : 02617165
Unique Number : 5734275
Test Package : MOB 1

GFL Environmental - 730 - Chicoutimi - Hauling
 3199 Boul. Talbot
 Chicoutimi, QC
 CA G7H 5B1
 Contact: Yan Houde
 yhoude@matrec.ca
 T: (418)549-8074
 F: (418)549-7973

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.