



Machine Id
928109
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Confirmez la source du lubrifiant utilisé pour l'appoint/remplissage.
Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

WEAR

Les taux d'usure de tous les composants sont normaux.

CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION











Les niveaux d'additifs indiquent l'ajout d'une autre marque ou d'un autre type d'huile. L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096655	GFL0096637	GFL0080323
Sample Date		Client Info		22 Jan 2024	25 Oct 2023	08 Aug 2023
Machine Age	hrs	Client Info		284768	270764	256180
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185(m)	>220	178	157	143
Chromium	ppm	ASTM D5185(m)	>2	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>75	35	32	30
Lead	ppm	ASTM D5185(m)	>95	9	9	8
Copper	ppm	ASTM D5185(m)	>60	38	36	33
Tin	ppm	ASTM D5185(m)	>10	5	4	4
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>25	11	10	10
Potassium	ppm	ASTM D5185(m)	>20	2	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		8	5	5
Boron	ppm	ASTM D5185(m)		96	93	97
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	<1
Manganese	ppm	ASTM D5185(m)		1	<1	1
Magnesium	ppm	ASTM D5185(m)		2	2	2
Calcium	ppm	ASTM D5185(m)		25	26	26
Phosphorus	ppm	ASTM D5185(m)		229	232	254
Zinc	ppm	ASTM D5185(m)		6	6	7
Sulfur	ppm	ASTM D5185(m)		2258	2297	2250
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	33.1	33.2	33.5

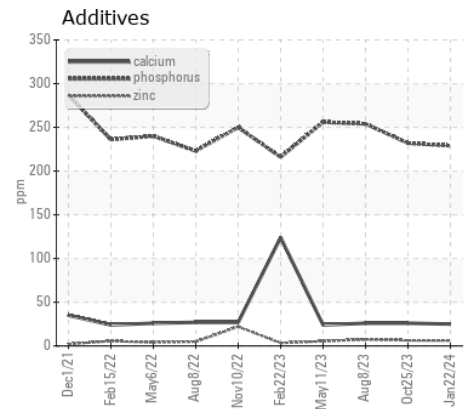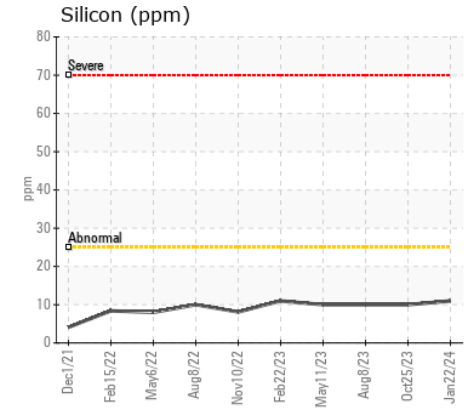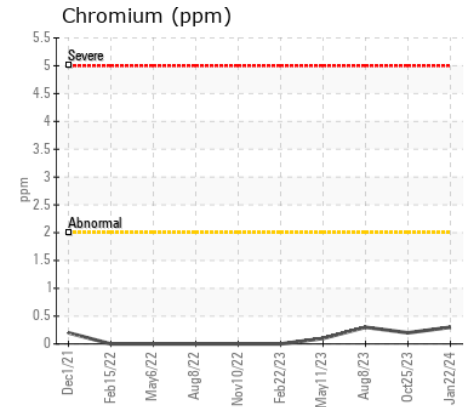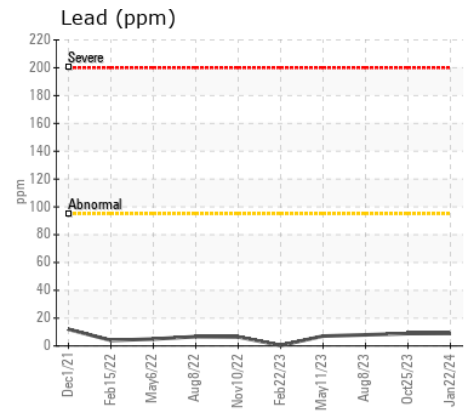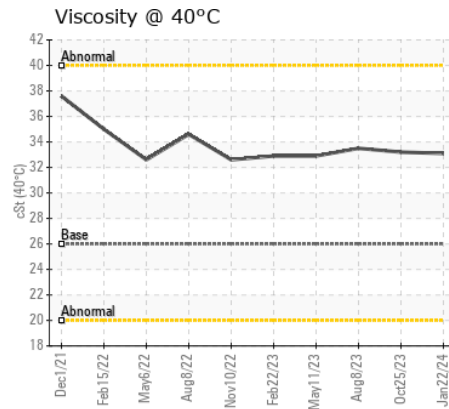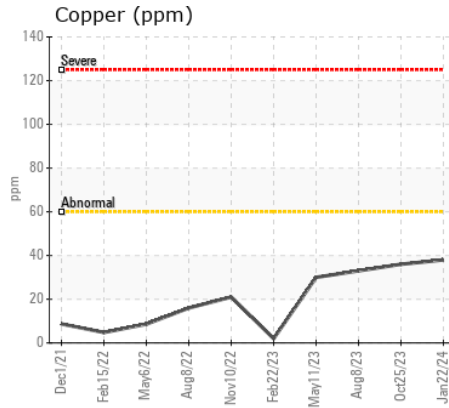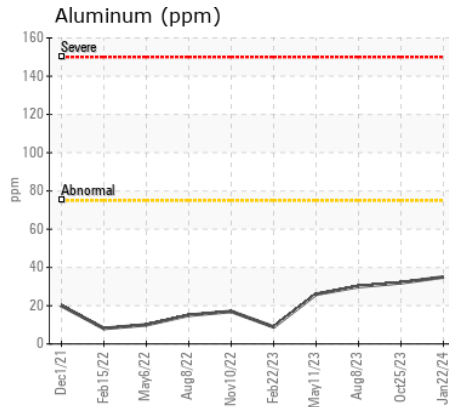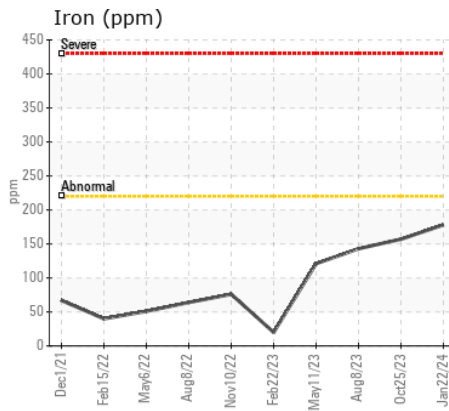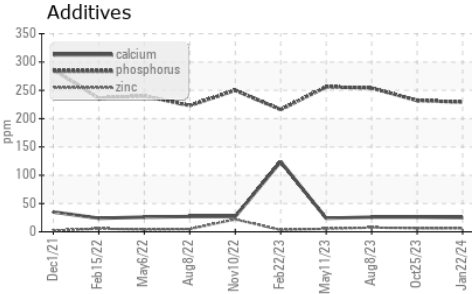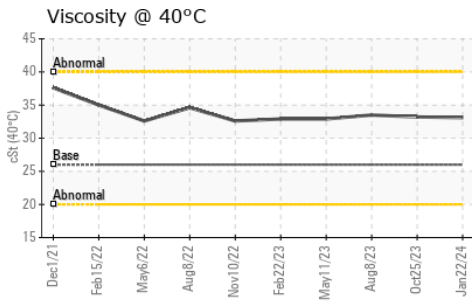

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096655
Lab Number : 02617167
Unique Number : 5734277
Test Package : MOB 1

GFL Environmental - 730 - Chicoutimi - Hauling
 3199 Boul. Talbot
 Chicoutimi, QC
 CA G7H 5B1
 Contact: Yan Houde
 yhoude@matrec.ca
 T: (418)549-8074
 F: (418)549-7973

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.