



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
811019
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.

CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION











L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0096621	GFL0096641	GFL0080314
Sample Date		Client Info		23 Jan 2024	05 Oct 2023	19 Apr 2023
Machine Age	hrs	Client Info		110711	0	79959
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

Iron	ppm	ASTM D5185(m)	>220	181	▲ 239	201
Chromium	ppm	ASTM D5185(m)	>2	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>5	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>75	36	▲ 79	▲ 80
Lead	ppm	ASTM D5185(m)	>95	9	66	60
Copper	ppm	ASTM D5185(m)	>60	39	50	49
Tin	ppm	ASTM D5185(m)	>10	5	7	7
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>25	12	14	14
Potassium	ppm	ASTM D5185(m)	>20	3	6	8
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		8	11	11
Boron	ppm	ASTM D5185(m)		97	77	86
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		0	<1	1
Manganese	ppm	ASTM D5185(m)		1	2	3
Magnesium	ppm	ASTM D5185(m)		2	<1	<1
Calcium	ppm	ASTM D5185(m)		26	39	40
Phosphorus	ppm	ASTM D5185(m)		234	257	291
Zinc	ppm	ASTM D5185(m)		6	7	17
Sulfur	ppm	ASTM D5185(m)		2300	566	609
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	32.9	36.3	36.2

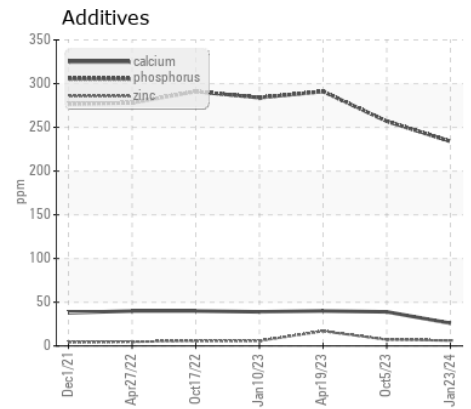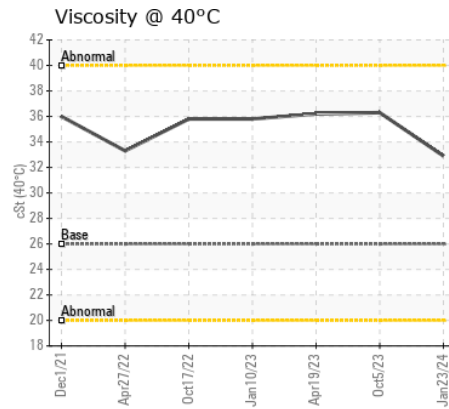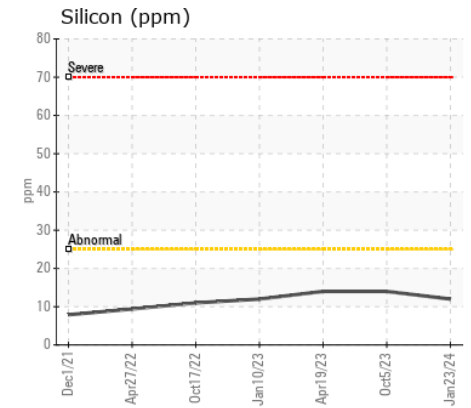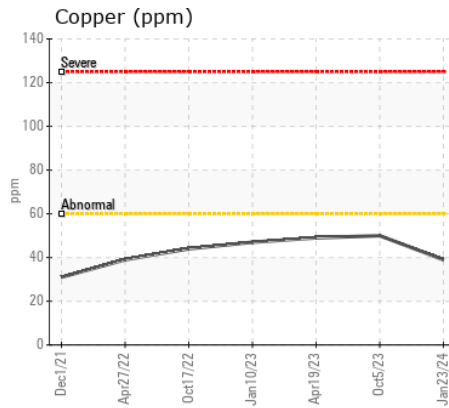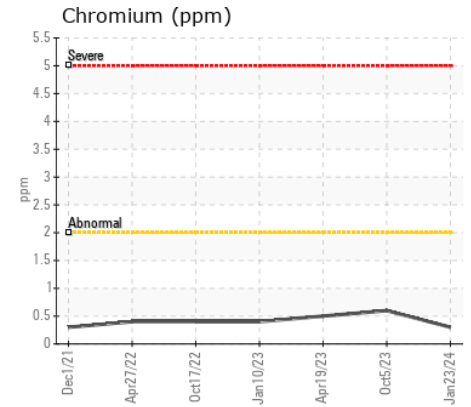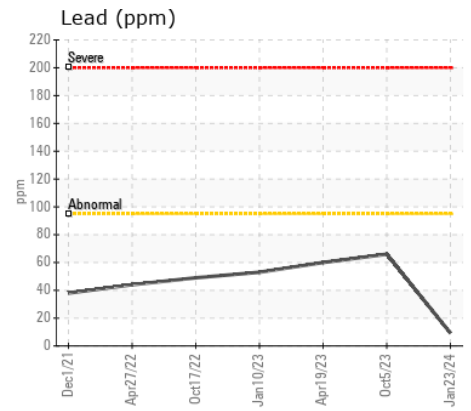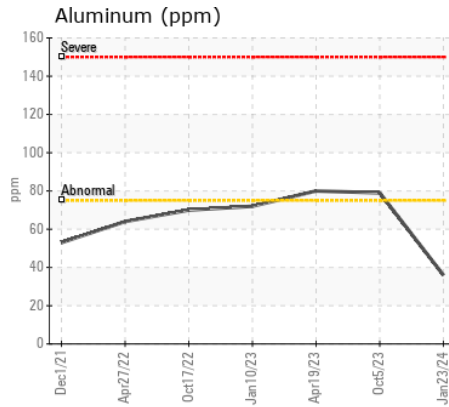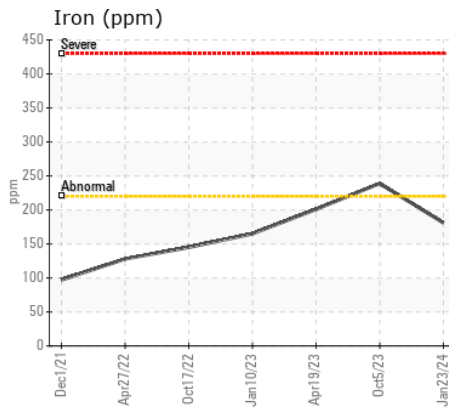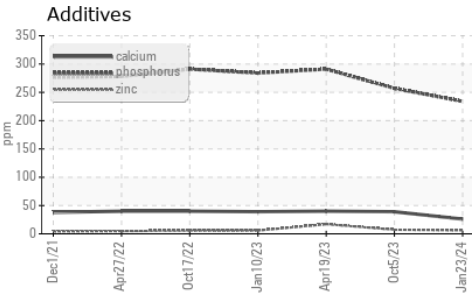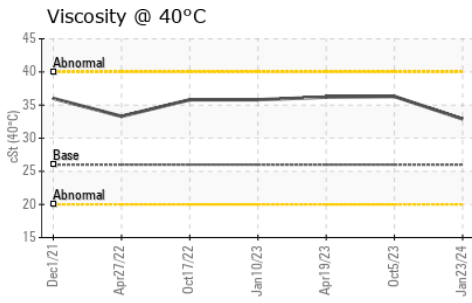

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0096621
Lab Number : 02617168
Unique Number : 5734278
Test Package : MOB 1
Received : 21 Feb 2024
Tested : 22 Feb 2024
Diagnosed : 22 Feb 2024 - Wes Davis

GFL Environmental - 730 - Chicoutimi - Hauling
 3199 Boul. Talbot
 Chicoutimi, QC
 CA G7H 5B1
 Contact: Yan Houde
 yhoude@matrec.ca
 T: (418)549-8074
 F: (418)549-7973

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.