



Machine Id  
**412025**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (36 LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0086789</b>	GFL0094426	GFL0086758
Sample Date		Client Info		<b>21 Feb 2024</b>	17 Nov 2023	15 Jun 2023
Machine Age	hrs	Client Info		<b>6562</b>	5903	4500
Oil Age	hrs	Client Info		<b>6562</b>	0	4500
Filter Age	hrs	Client Info		<b>6562</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	<b>11</b>	12	40
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	2
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	2	4
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185(m)	>330	<b>8</b>	2	7
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	4	6
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	7
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>4	<b>0.4</b>	0.4	0.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.0</b>	9.5	12.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.5</b>	20.2	25.8
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	1	3
Boron	ppm	ASTM D5185(m)	0	<b>5</b>	5	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>61</b>	60	63
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	1
Magnesium	ppm	ASTM D5185(m)	1010	<b>946</b>	951	984
Calcium	ppm	ASTM D5185(m)	1070	<b>1103</b>	1104	1167
Phosphorus	ppm	ASTM D5185(m)	1150	<b>992</b>	977	1052
Zinc	ppm	ASTM D5185(m)	1270	<b>1160</b>	1182	1246
Sulfur	ppm	ASTM D5185(m)	2060	<b>2626</b>	2398	2275
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.1</b>	15.7	20.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>13.5</b>	13.5	13.5

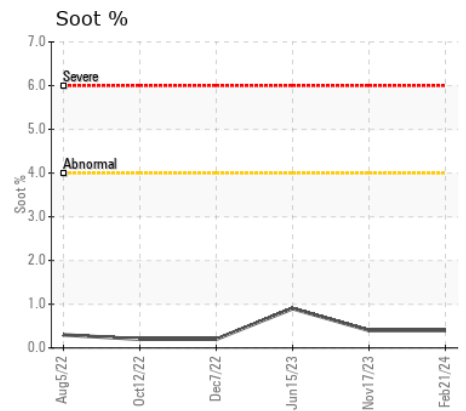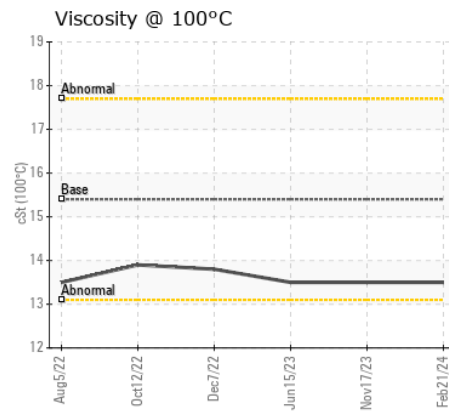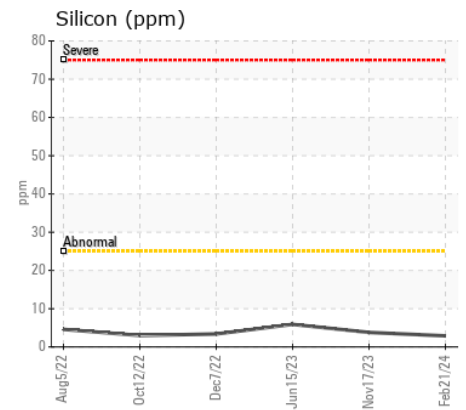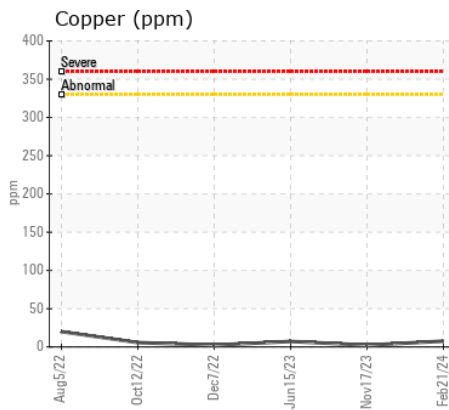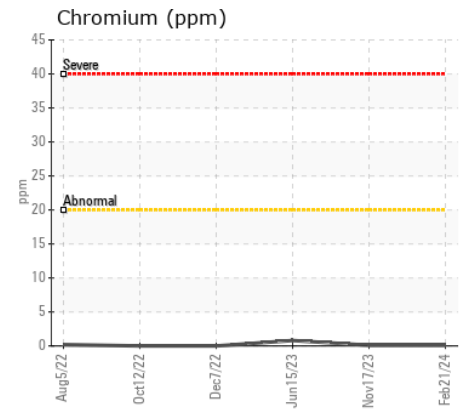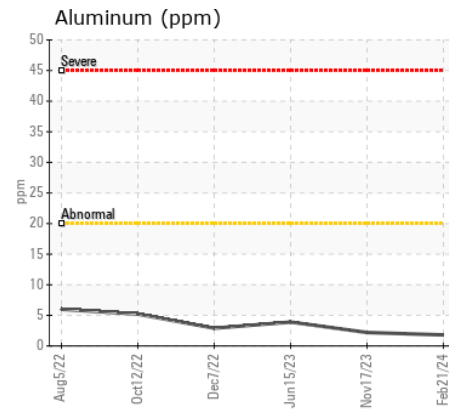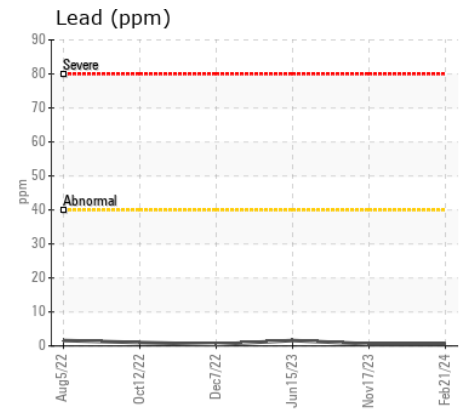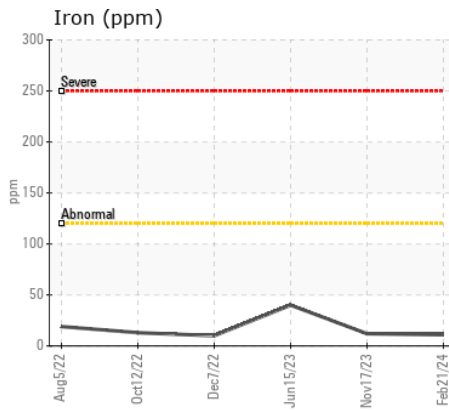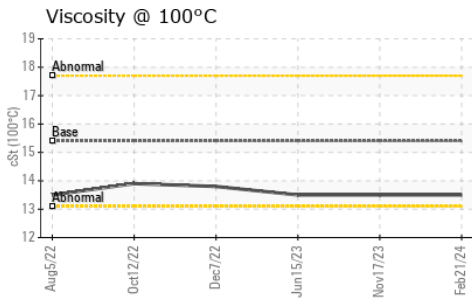

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0086789  
**Lab Number** : 02617342  
**Unique Number** : 5734452  
**Test Package** : MOB 1 ( Additional Tests: Visual )  
**Received** : 22 Feb 2024  
**Tested** : 22 Feb 2024  
**Diagnosed** : 22 Feb 2024 - Wes Davis

**GFL Environmental - 222 - Sandhill**  
 SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCE ROAD  
 ORANGEVILLE, ON  
 CA L9W 3X5  
 Contact: Kim Thompson  
 KThompson@gflenv.com  
 T: (905)843-2552  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.