



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**NEW HOLLAND T8.330 ZBRC08799**

Component  
**Diesel Engine**

Fluid  
**SHELL 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0631036	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		4125	---	---
Oil Age	hrs	Client Info		7	---	---
Filter Age	hrs	Client Info		7	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	3	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	5	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	10	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.4	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.3	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>150	3	---	---
Boron	ppm	ASTM D5185(m)		443	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		80	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		438	---	---
Calcium	ppm	ASTM D5185(m)		1434	---	---
Phosphorus	ppm	ASTM D5185(m)		1001	---	---
Zinc	ppm	ASTM D5185(m)		1118	---	---
Sulfur	ppm	ASTM D5185(m)		2898	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		15.0	---	---

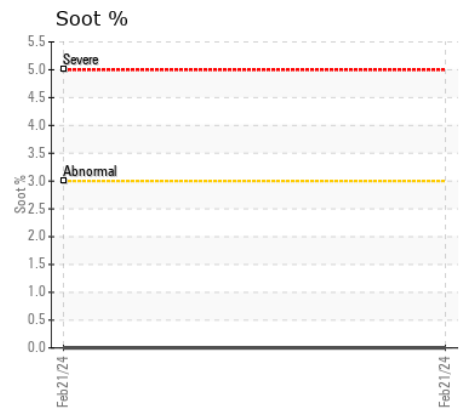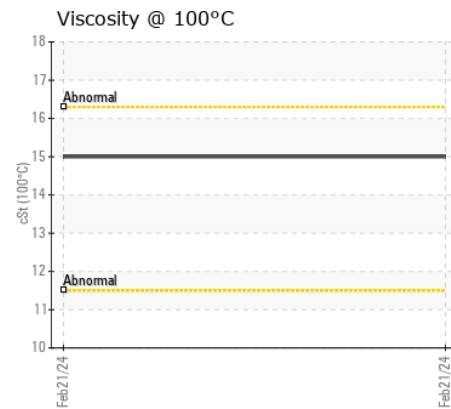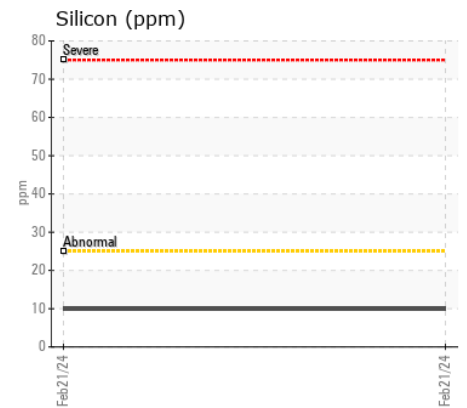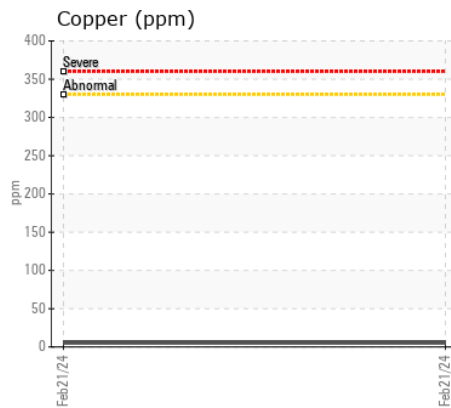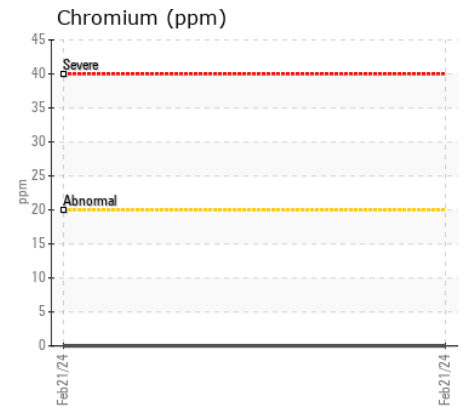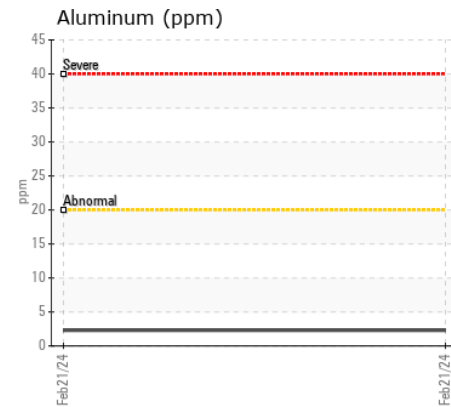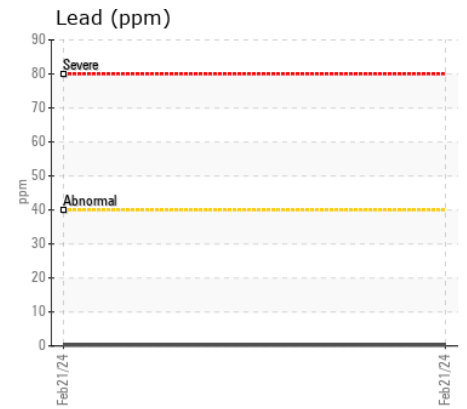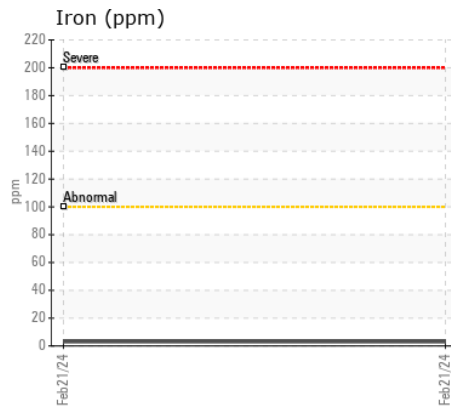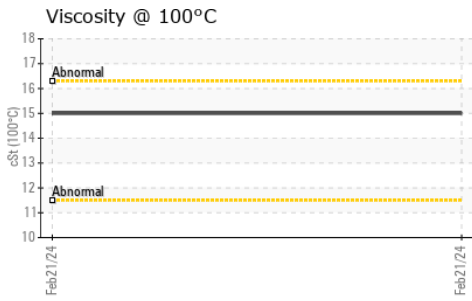

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0631036 **Received** : 22 Feb 2024  
**Lab Number** : 02617353 **Tested** : 22 Feb 2024  
**Unique Number** : 5734463 **Diagnosed** : 22 Feb 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**ONEIDA TRUCK & TRAILER LTD.**  
 634 4TH LINE  
 CALEDONIA, ON  
 CA N3W 2B3  
 Contact: Bernard Nleberg  
 bernard@oneidanewholland.com  
 T: (905)765-5011  
 F: (905)765-5842

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.