



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH40M 156305-1215
Component
Transmission (Manual)
Fluid
TDTO FLUID SAE 20 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) TDTO FLUID SAE 20. Please confirm.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0278469	---	---
Sample Date		Client Info		20 Feb 2024	---	---
Machine Age	hrs	Client Info		536	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>200	16	---	---
Chromium	ppm	ASTM D5185(m)	>5	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>7	0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	3	---	---
Lead	ppm	ASTM D5185(m)	>45	<1	---	---
Copper	ppm	ASTM D5185(m)	>225	11	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>125	5	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		44	---	---
Boron	ppm	ASTM D5185(m)	37	3	---	---
Barium	ppm	ASTM D5185(m)	7	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		11	---	---
Magnesium	ppm	ASTM D5185(m)	40	9	---	---
Calcium	ppm	ASTM D5185(m)	2650	3189	---	---
Phosphorus	ppm	ASTM D5185(m)	1050	1028	---	---
Zinc	ppm	ASTM D5185(m)	1075	1084	---	---
Sulfur	ppm	ASTM D5185(m)	5750	6640	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	60	60.0	---	---

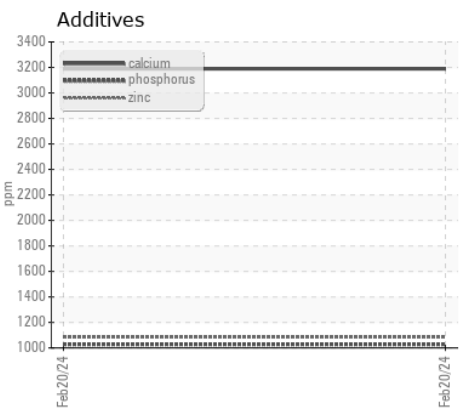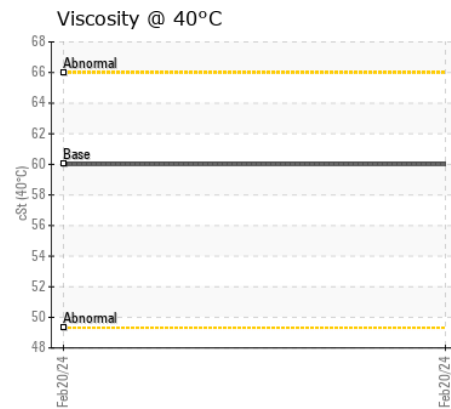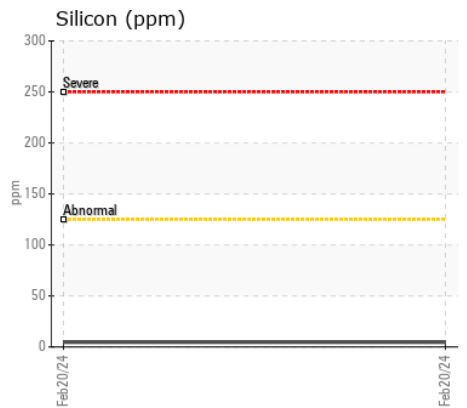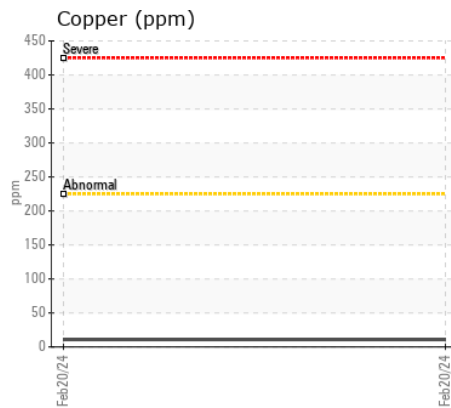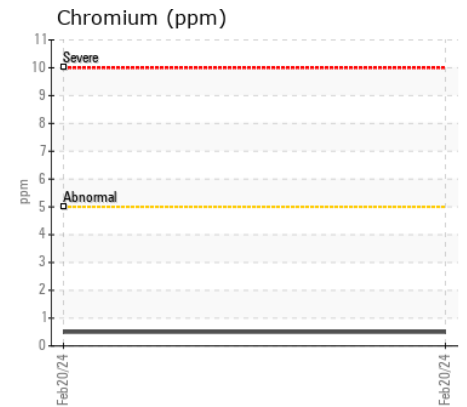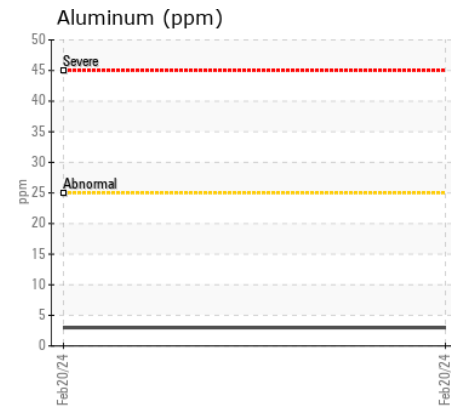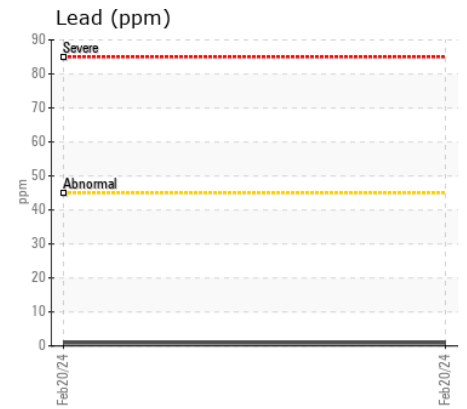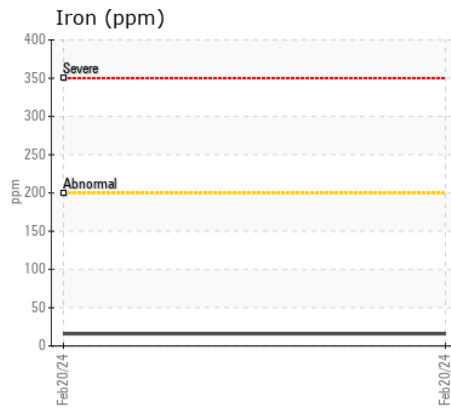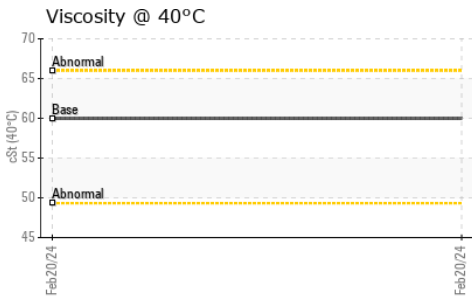

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0278469
Lab Number : 02617450
Unique Number : 5734560
Test Package : MOB 1
Received : 22 Feb 2024
Tested : 22 Feb 2024
Diagnosed : 22 Feb 2024 - Wes Davis

Urban Mine
 72 Rothwell Rd.
 Winnipeg, MB
 CA R3P 2H7
 Contact: SERVICE

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (204)774-0192
 F: