



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
VINCI [392571]
Machine Id
VOLVO EC950F 410078
Component
Front Right Final Drive
Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449376	---	---
Sample Date		Client Info		09 Feb 2024	---	---
Machine Age	hrs	Client Info		3908	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	309	---	---
Chromium	ppm	ASTM D5185(m)	>10	4	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	16	---	---
Lead	ppm	ASTM D5185(m)	>25	<1	---	---
Copper	ppm	ASTM D5185(m)	>50	1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	59	---	---
Potassium	ppm	ASTM D5185(m)	>20	6	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	379	58	---	---
Barium	ppm	ASTM D5185(m)	0.0	10	---	---
Molybdenum	ppm	ASTM D5185(m)	0.8	0	---	---
Manganese	ppm	ASTM D5185(m)	0.0	3	---	---
Magnesium	ppm	ASTM D5185(m)	31	4	---	---
Calcium	ppm	ASTM D5185(m)	38	22	---	---
Phosphorus	ppm	ASTM D5185(m)	1077	1714	---	---
Zinc	ppm	ASTM D5185(m)	46	22	---	---
Sulfur	ppm	ASTM D5185(m)	23526	18957	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	139	141	---	---

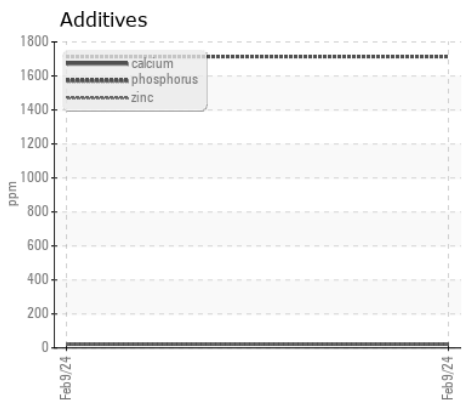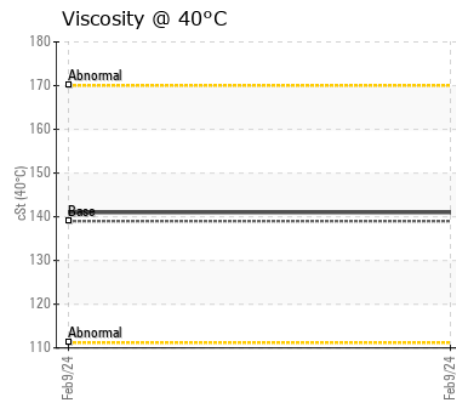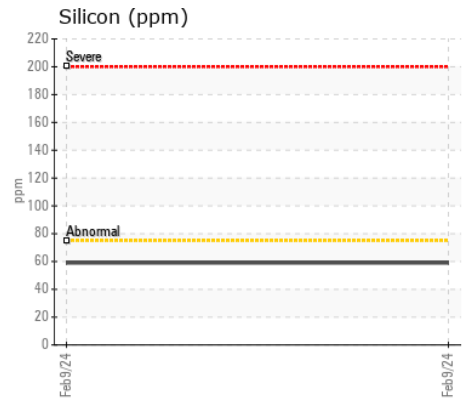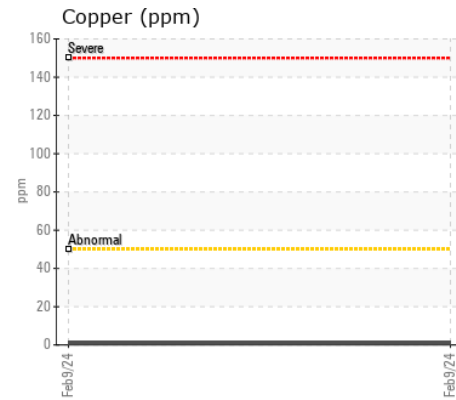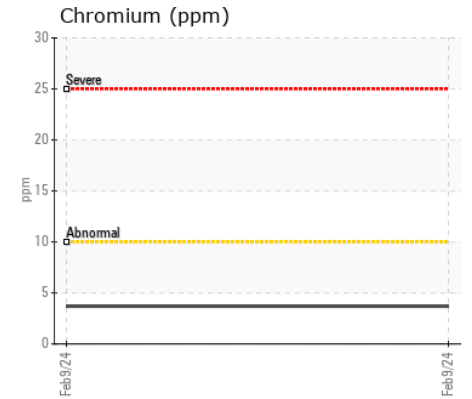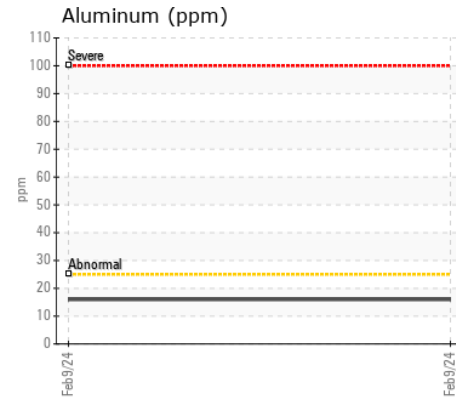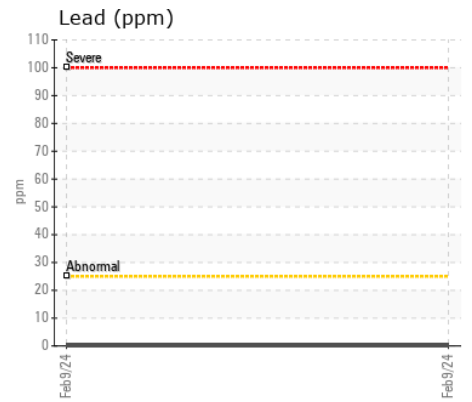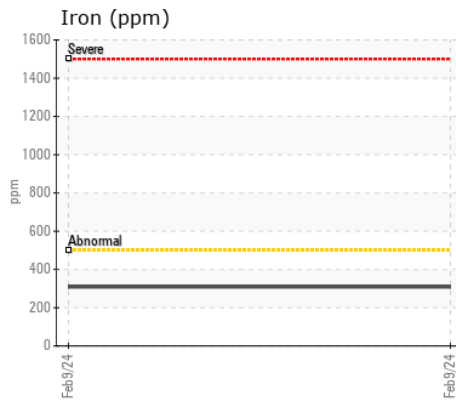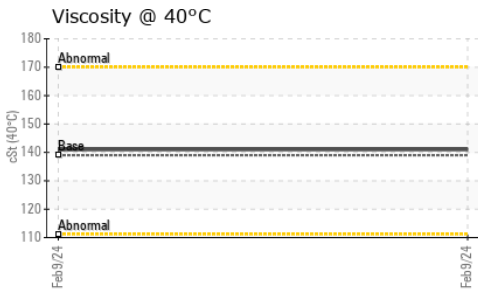

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP449376
Lab Number : 02617490
Unique Number : 5734600
Test Package : MOB 1
Received : 22 Feb 2024
Tested : 22 Feb 2024
Diagnosed : 22 Feb 2024 - Wes Davis

STRONGCO EQUIPMENT-CALGARY
 7923 54TH STREET SE
 CALGARY, AB
 CA T2C 4R7
 Contact: Lucas Slusarenko
 lslusarenko@strongco.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

F: (403)216-1016