



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**VINCI [392571]**  
Machine Id  
**VOLVO EC950F 410078**  
Component  
**Front Left Final Drive**  
Fluid  
**VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)**

## RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449385	---	---
Sample Date		Client Info		09 Feb 2024	---	---
Machine Age	hrs	Client Info		3908	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	224	---	---
Chromium	ppm	ASTM D5185(m)	>10	3	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	9	---	---
Lead	ppm	ASTM D5185(m)	>25	0	---	---
Copper	ppm	ASTM D5185(m)	>50	<1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	34	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	379	81	---	---
Barium	ppm	ASTM D5185(m)	0.0	10	---	---
Molybdenum	ppm	ASTM D5185(m)	0.8	0	---	---
Manganese	ppm	ASTM D5185(m)	0.0	2	---	---
Magnesium	ppm	ASTM D5185(m)	31	3	---	---
Calcium	ppm	ASTM D5185(m)	38	14	---	---
Phosphorus	ppm	ASTM D5185(m)	1077	1768	---	---
Zinc	ppm	ASTM D5185(m)	46	11	---	---
Sulfur	ppm	ASTM D5185(m)	23526	19487	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	139	151	---	---

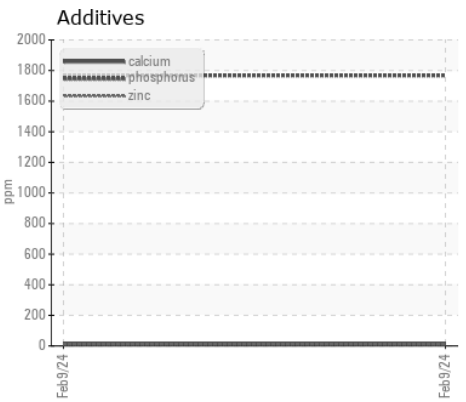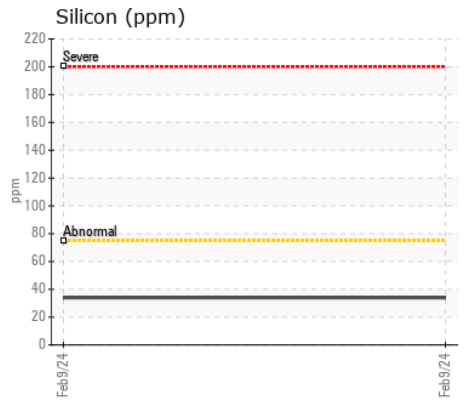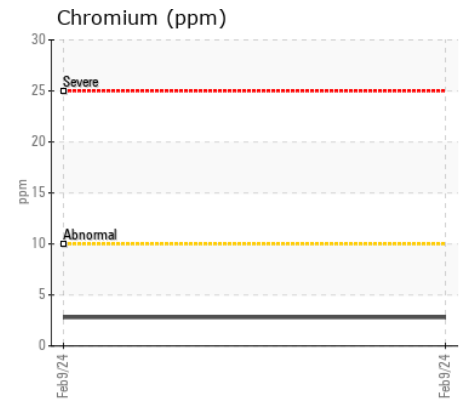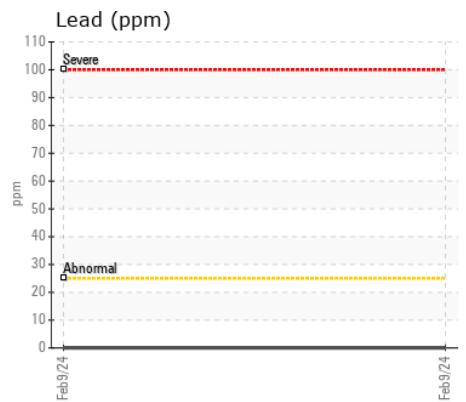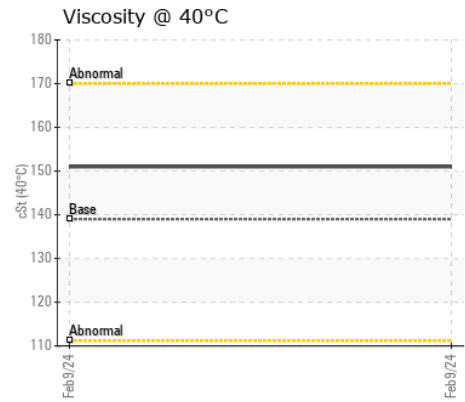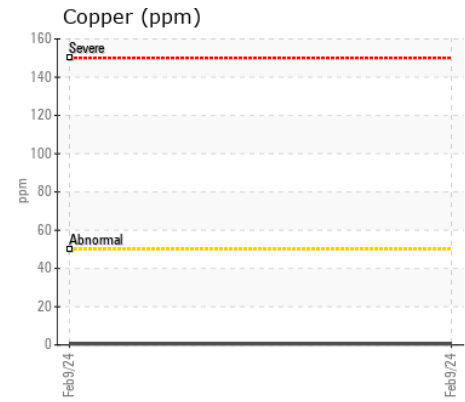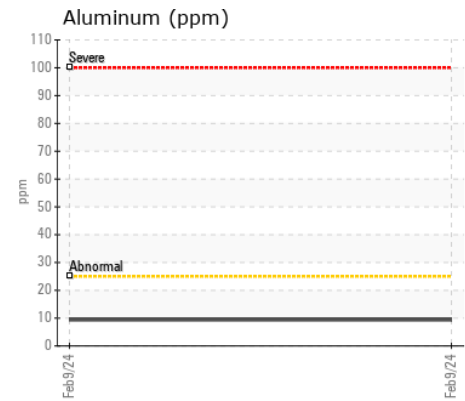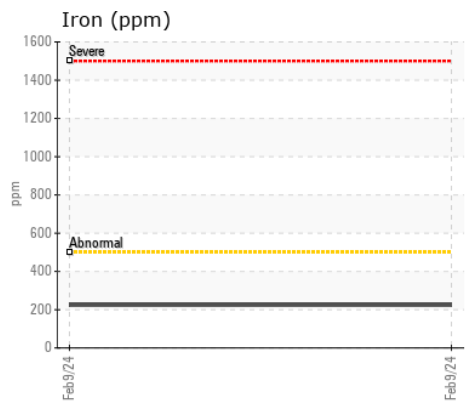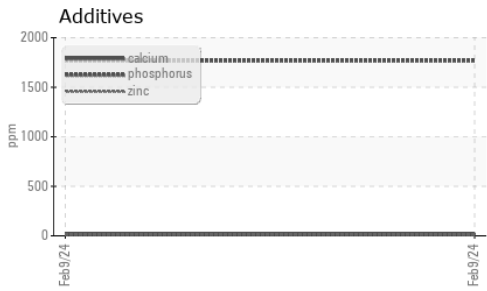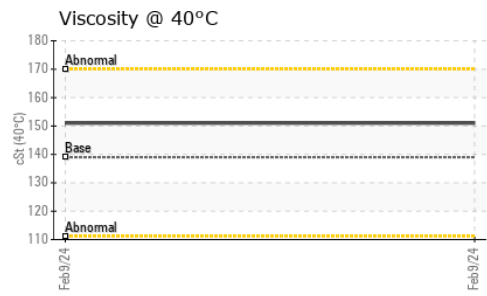

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP449385  
**Lab Number** : 02617491  
**Unique Number** : 5734601  
**Test Package** : MOB 1

**STRONGCO EQUIPMENT-CALGARY**  
 7923 54TH STREET SE  
 CALGARY, AB  
 CA T2C 4R7  
 Contact: Lucas Slusarenko  
 lslusarenko@strongco.com  
 T:  
 F: (403)216-1016

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.