

WEAR NORMAL CONTAMINATION NORMAL FLUID CONDITION NORMAL

Machine Id LIEBHERR LH40M 156305-1215 Component

Rear Left Wheel Hub

GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0278477		
Sample Date		Client Info		20 Feb 2024		
Machine Age	hrs	Client Info		536		
Oil Age	hrs	Client Info		0		
Filter Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Filter Changed		Client Info		None		
Sample Status				NORMAL		
Iron	ppm	ASTM D5185(m)	>650	28		
Chromium	ppm	ASTM D5185(m)	>4	<1		
Nickel	ppm	ASTM D5185(m)	>4	0		
Titanium	ppm	ASTM D5185(m)	>4	0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	<1		
Lead	ppm	ASTM D5185(m)	>4	<1		
Copper	ppm	ASTM D5185(m)	>60	5		
Tin	ppm	ASTM D5185(m)	>4	0		
Vanadium	ppm	ASTM D5185(m)		0		
White Metal	scalar	Visual*	NONE	VLITE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Cilicon			. 75	E		
Silicon	ppm	ASTM D5185(m)	>75	5		
Potassium Water	ppm	ASTM D5185(m) WC Method	>20 >0.2	-		
Silt	aaalar			NEG		
	scalar	Visual*	NONE	NONE		
Debris Sand/Dirt	scalar	Visual* Visual*	NONE	NONE		
	scalar					
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.2	NEG		
Sodium	ppm	ASTM D5185(m)	>170	2		
Boron	ppm	ASTM D5185(m)	400	10		
Barium	ppm	ASTM D5185(m)	200	1		
Molybdenum	ppm	ASTM D5185(m)	12	<1		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	12	<1		
Calcium	ppm	ASTM D5185(m)	150	134		
Phosphorus	ppm	ASTM D5185(m)	1650	1428		
Zinc	ppm	ASTM D5185(m)	125	21		
Sulfur	ppm	ASTM D5185(m)	22500	17952		
Vise @ 40°C	0°t	ASTM D7270(m)	1/2	1/1		

Report Id: URBWIN [WCAMIS] 02617500 (Generated: 02/22/2024 15:45:07) Rev: 1


Visc @ 40°C


cSt

ASTM D7279(m) 143

Submitted By: Vincent Blanchette

141

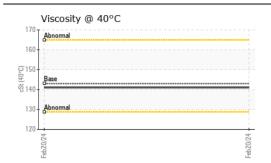

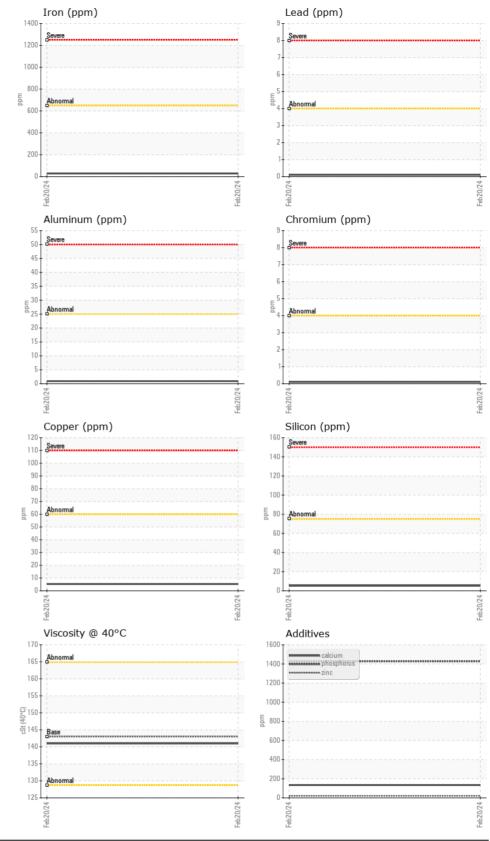

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CALA Sample No. Received : 22 Feb 2024 : LH0278477 Lab Number : 02617500 Tested : 22 Feb 2024 ISO 17025:2017 Accredited Laboratory Diagnosed Unique Number : 5734610 : 22 Feb 2024 - Wes Davis Test Package : MOB 1 To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

72 Rothwell Rd. Winnipeg, MB CA R3P 2H7 Contact: SERVICE

Urban Mine

T: (204)774-0192 F:

Submitted By: Vincent Blanchette

Page 2 of 2