



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
827083

Component
Front Differential

Fluid
GEAR OIL SAE 75W90 (--- LTR)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) GEAR OIL SAE 75W90. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans l'huile.

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0079055	---	---
Sample Date		Client Info		20 Feb 2024	---	---
Machine Age	kms	Client Info		344609	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>500	255	---	---
Chromium	ppm	ASTM D5185(m)	>10	2	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	8	---	---
Lead	ppm	ASTM D5185(m)	>25	<1	---	---
Copper	ppm	ASTM D5185(m)	>100	1	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>75	146	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)		8	---	---
Boron	ppm	ASTM D5185(m)	400	283	---	---
Barium	ppm	ASTM D5185(m)	200	2	---	---
Molybdenum	ppm	ASTM D5185(m)	12	<1	---	---
Manganese	ppm	ASTM D5185(m)		3	---	---
Magnesium	ppm	ASTM D5185(m)	12	4	---	---
Calcium	ppm	ASTM D5185(m)	150	87	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1188	---	---
Zinc	ppm	ASTM D5185(m)	125	16	---	---
Sulfur	ppm	ASTM D5185(m)	22500	19303	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	93.7	---	---

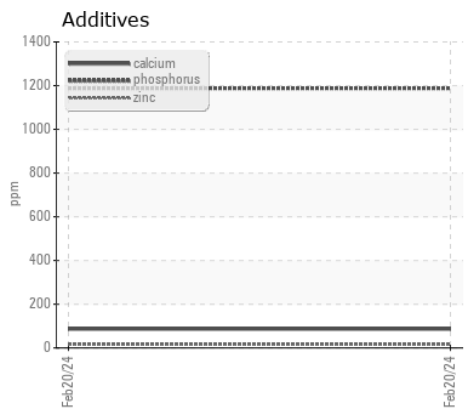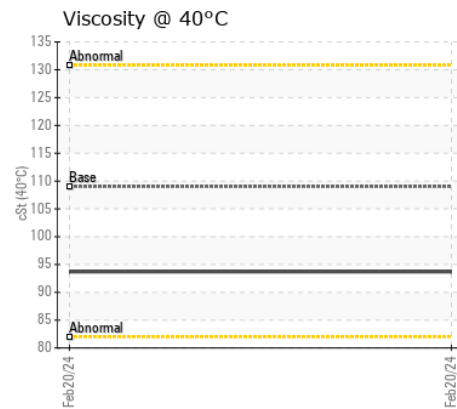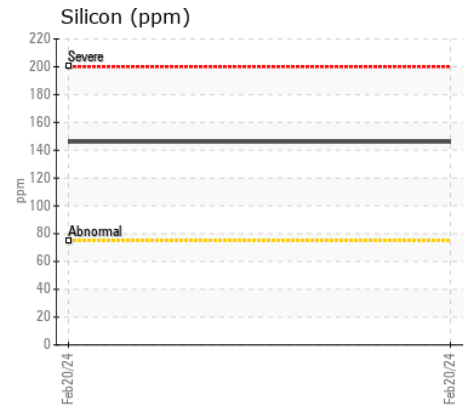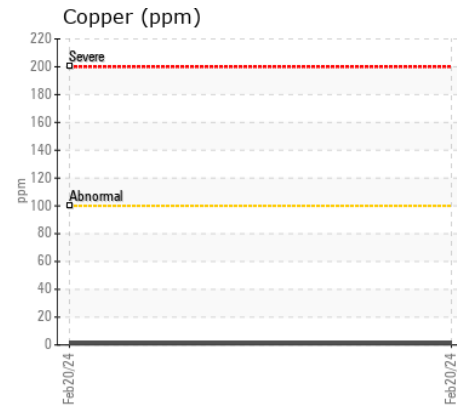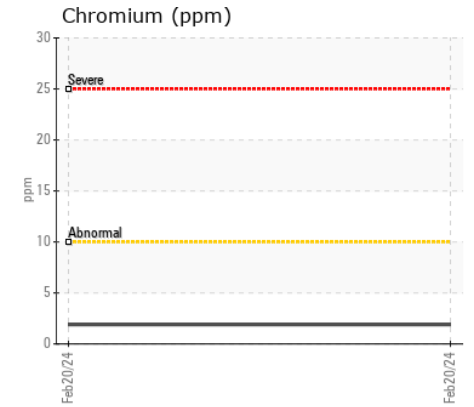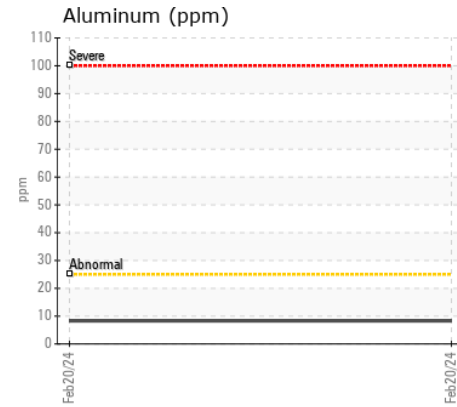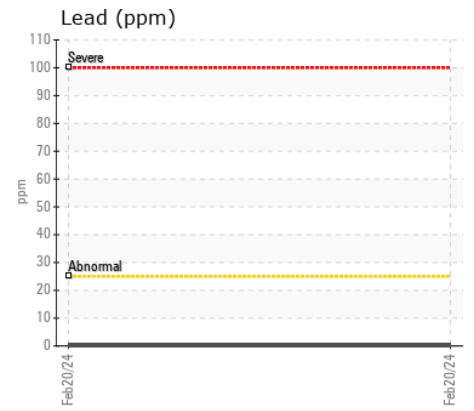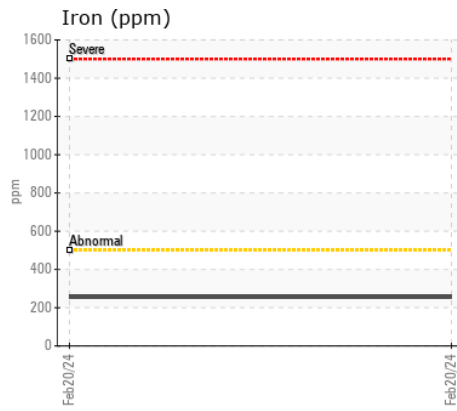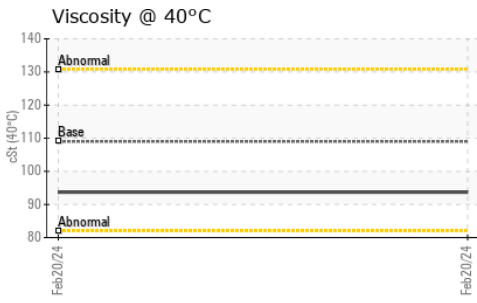

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0079055 **Received** : 22 Feb 2024
Lab Number : 02617510 **Tested** : 22 Feb 2024
Unique Number : 5734620 **Diagnosed** : 22 Feb 2024 - Kevin Marson
Test Package : MOB 1

Matrec - 791 - Rimouski
 350 Avenue de L'Industrie
 Rimouski, QC
 CA G5M 1W4
 Contact: Daniel Cloutier
 dacloutier@gflenv.com
 T: (418)724-6447 poste 4142
 F: (418)388-2038

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.