



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[800039]
Machine Id
VOLVO L150H 7233
Component
Diesel Engine
Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP392883	---	---
Sample Date		Client Info		16 Feb 2024	---	---
Machine Age	hrs	Client Info		1586	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	14	---	---
Chromium	ppm	ASTM D5185(m)	>10	0	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>10	2	---	---
Lead	ppm	ASTM D5185(m)	>20	4	---	---
Copper	ppm	ASTM D5185(m)	>15	141	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	10	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol	%	ASTM D7922*		0.0	---	---
Soot %	%	ASTM D7844*	>3	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.2	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	23.5	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)	2.5	33	---	---
Barium	ppm	ASTM D5185(m)	0.0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	0.7	49	---	---
Manganese	ppm	ASTM D5185(m)	0.0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	256	387	---	---
Calcium	ppm	ASTM D5185(m)	2057	1805	---	---
Phosphorus	ppm	ASTM D5185(m)	935	910	---	---
Zinc	ppm	ASTM D5185(m)	1223	1058	---	---
Sulfur	ppm	ASTM D5185(m)	4079	2576	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	21.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	12.1	---	---

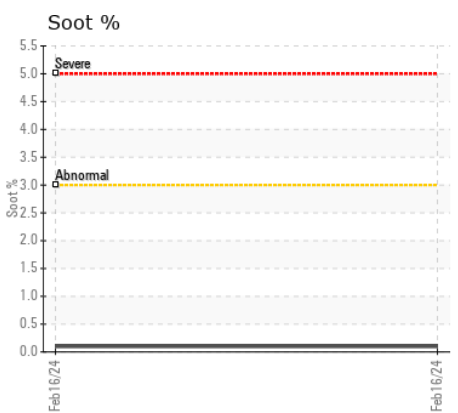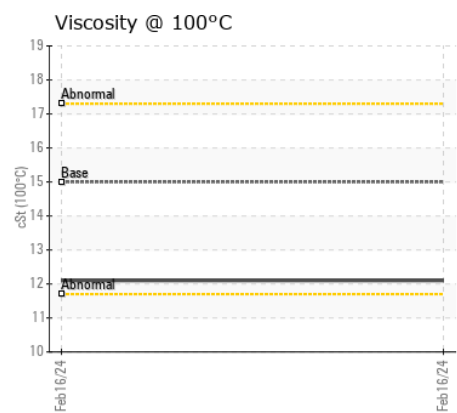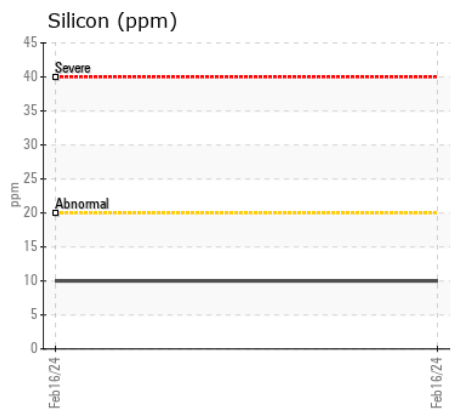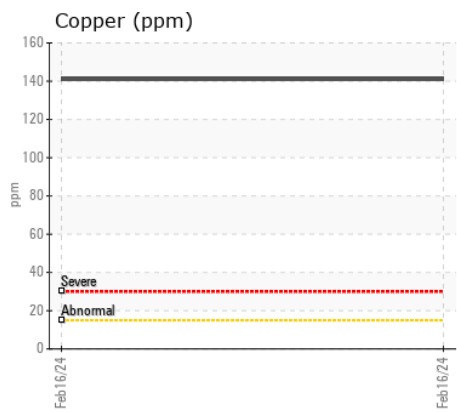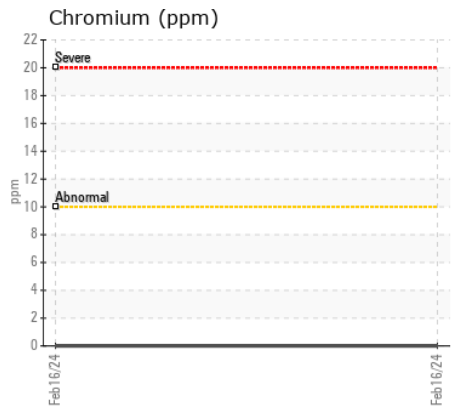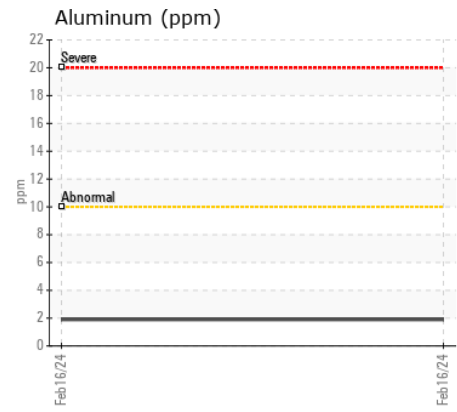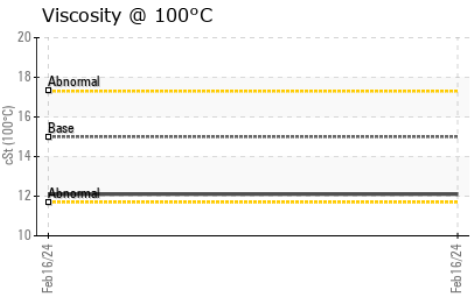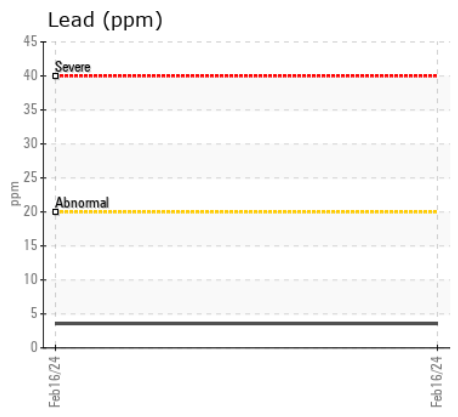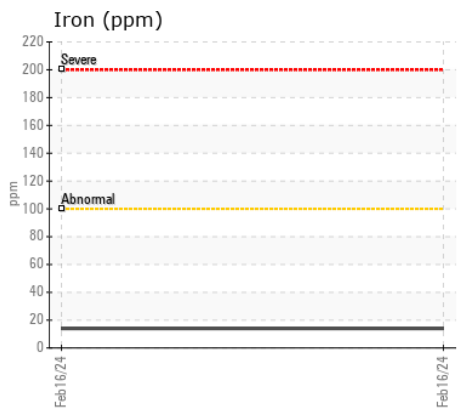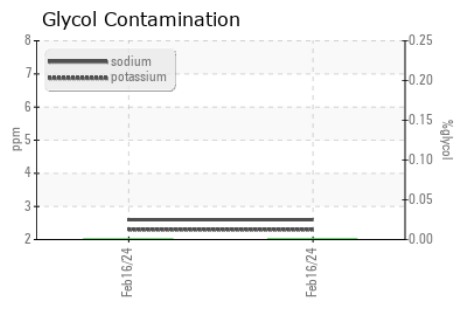

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP392883 **Received** : 23 Feb 2024
Lab Number : 02617583 **Tested** : 23 Feb 2024
Unique Number : 5734693 **Diagnosed** : 23 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Glycol)

STRONGCO EQUIPMENT INC.
 55 ISNOR DRIVE, BURNSIDE INDUSTRIALPARK
 DARTMOUTH, NS
 CA B3B 1N6
 Contact: Lindsay Downs
 ldowns@strongco.com
 T: (902)468-5010
 F: (902)468-2468

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.