



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**221094**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0102590</b>	GFL0093904	GFL0090584
Sample Date		Client Info		<b>19 Feb 2024</b>	20 Sep 2023	02 Sep 2023
Machine Age	hrs	Client Info		<b>9975</b>	9858	9841
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>9</b>	4	12
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.5</b>	4.8	6.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.1</b>	17.9	19.7
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>3</b>	1	1
Boron	ppm	ASTM D5185(m)	2	<b>2</b>	3	4
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>57</b>	59	54
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>927</b>	979	918
Calcium	ppm	ASTM D5185(m)	1050	<b>1023</b>	1054	974
Phosphorus	ppm	ASTM D5185(m)	995	<b>1001</b>	1024	991
Zinc	ppm	ASTM D5185(m)	1180	<b>1139</b>	1189	1118
Sulfur	ppm	ASTM D5185(m)	2600	<b>2664</b>	2658	2461
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.8</b>	13.6	14.9
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.2</b>	11.3	11.1

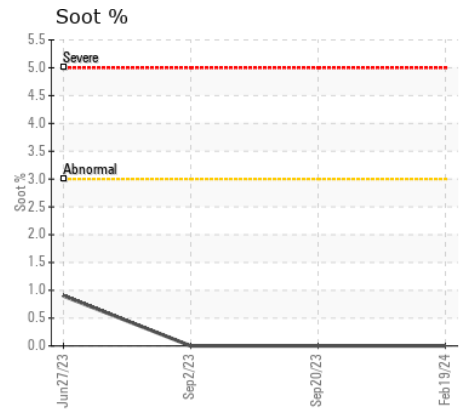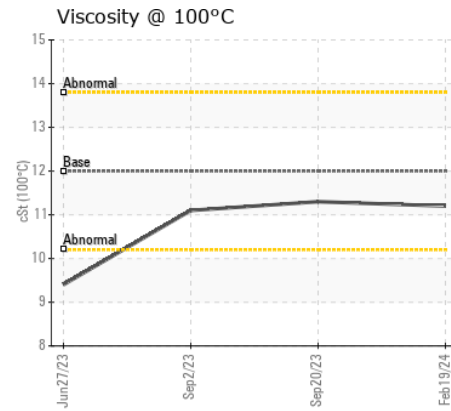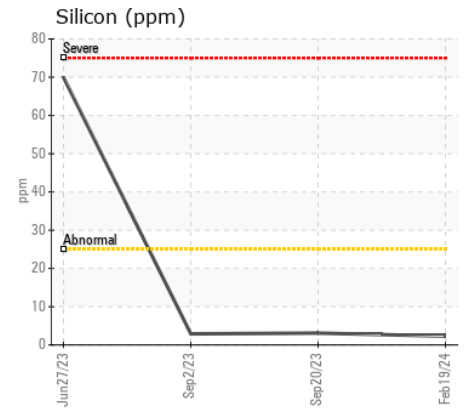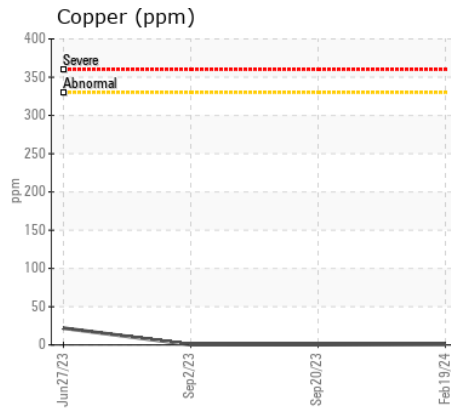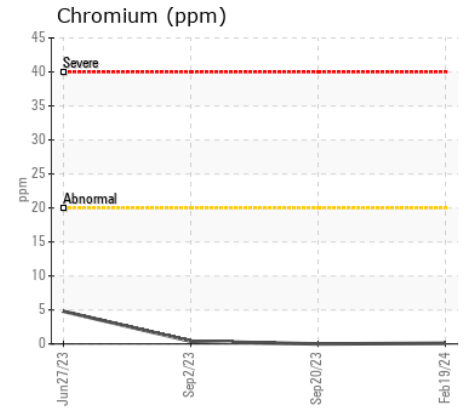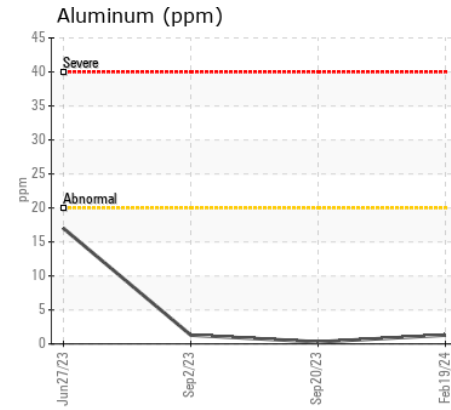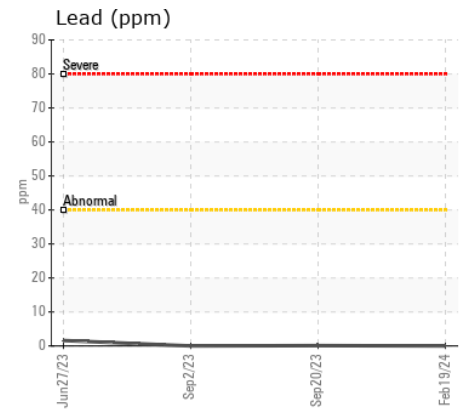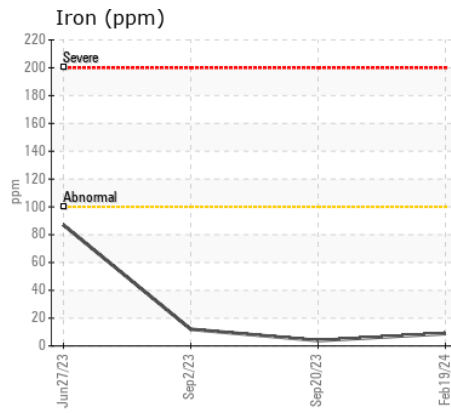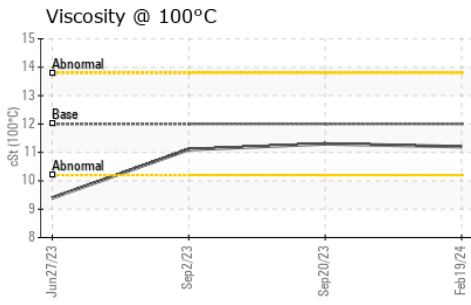

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0102590  
**Lab Number** : 02617609  
**Unique Number** : 5734719  
**Test Package** : MOB 1  
**Received** : 23 Feb 2024  
**Tested** : 23 Feb 2024  
**Diagnosed** : 23 Feb 2024 - Kevin Marson

**GFL Environmental - 554 - Edmonton SW**  
 8409 -15th Street NW  
 Edmonton, AB  
 CA T6P 0B8  
 Contact: Tim Greig  
 tgreig@gflenv.com  
 T: (780)231-0521  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.