



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(374940)**  
Machine Id  
**LIEBHERR LH30M 137944-1253**  
Component  
**Transmission (Manual)**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0278726</b>	LH0216025	---
Sample Date		Client Info		<b>22 Feb 2024</b>	31 Aug 2022	---
Machine Age	hrs	Client Info		<b>2777</b>	551	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	<b>22</b>	11	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Silver	ppm	ASTM D5185(m)	>7	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>2</b>	3	---
Lead	ppm	ASTM D5185(m)	>45	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185(m)	>225	<b>22</b>	16	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>125	<b>4</b>	3	---
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	3	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>23</b>	40	---
Boron	ppm	ASTM D5185(m)		<b>4</b>	6	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>31</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>9</b>	9	---
Magnesium	ppm	ASTM D5185(m)		<b>507</b>	10	---
Calcium	ppm	ASTM D5185(m)		<b>2112</b>	3187	---
Phosphorus	ppm	ASTM D5185(m)		<b>1088</b>	1070	---
Zinc	ppm	ASTM D5185(m)		<b>1156</b>	1066	---
Sulfur	ppm	ASTM D5185(m)		<b>5436</b>	7486	---
Visc @ 40°C	cSt	ASTM D7279(m)		<b>53.8</b>	52.0	---

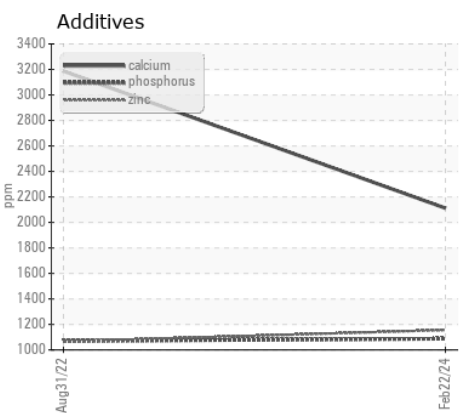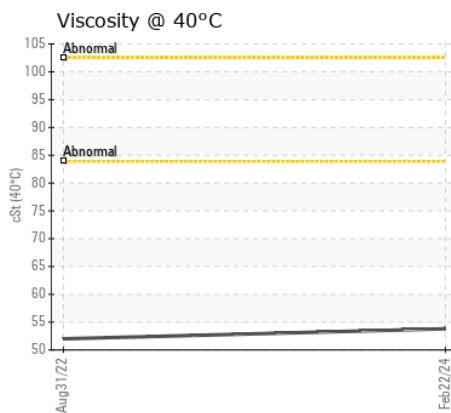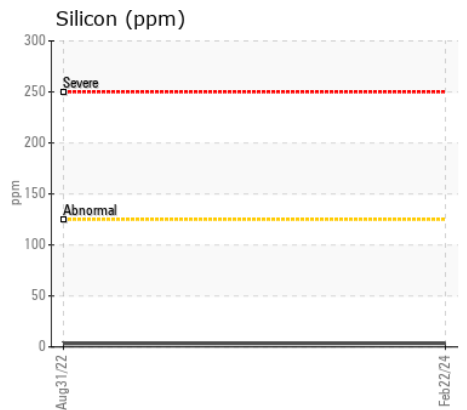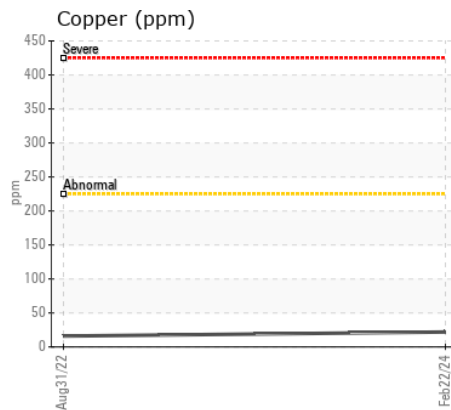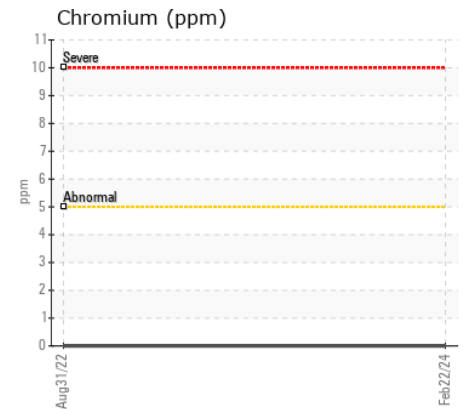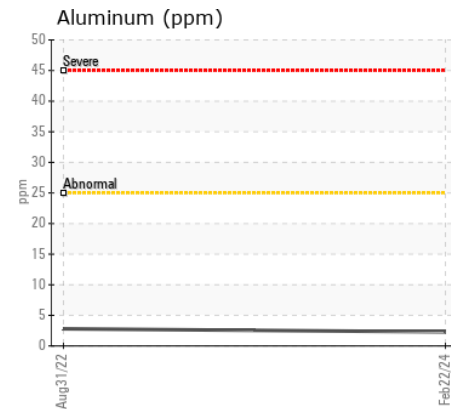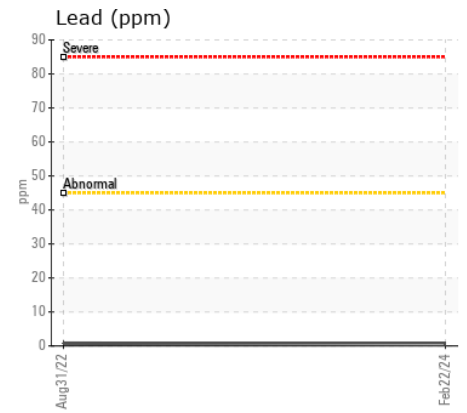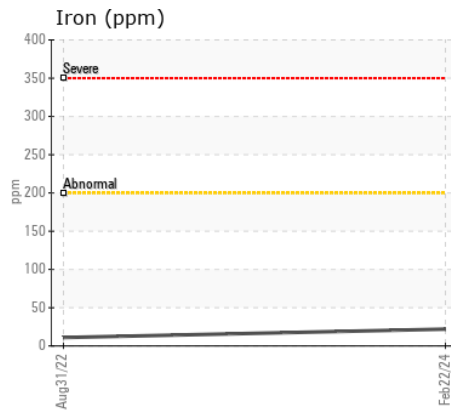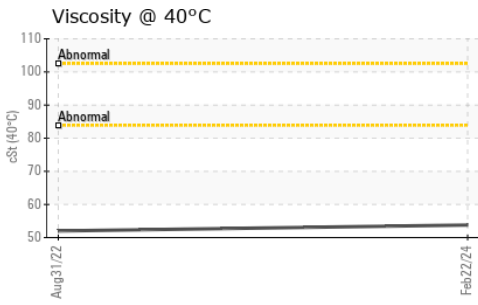

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0278726 **Received** : 23 Feb 2024  
**Lab Number** : 02617696 **Tested** : 23 Feb 2024  
**Unique Number** : 5734806 **Diagnosed** : 23 Feb 2024 - Kevin Marson  
**Test Package** : MOB 1

**KINGS AUTO WRECKERS**  
 1866 DRUMMOND LINE  
 PETERBOROUGH, ON  
 CA K9J 6X8  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: