

Machine Id
1206
Component
Rear Center Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (24 LTR)

RECOMMENDATION

The fluid change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0082739	PC0052604	PC0018584
Sample Date		Client Info		06 Feb 2024	27 Mar 2023	31 May 2022
Machine Age	kms	Client Info		674171	619195	568332
Oil Age	kms	Client Info		54859	50863	52251
Filter Age	kms	Client Info		54859	50863	52251
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

Aluminum ppm levels are abnormal. Torque converter wear is indicated.

Iron	ppm	ASTM D5185(m)	>230	64	51	51
Chromium	ppm	ASTM D5185(m)	>2	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>65	▲ 85	▲ 66	33
Lead	ppm	ASTM D5185(m)	>55	8	3	1
Copper	ppm	ASTM D5185(m)	>85	16	14	12
Tin	ppm	ASTM D5185(m)	>5	2	2	1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	13	10	8
Potassium	ppm	ASTM D5185(m)	>20	2	1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		12	10	6
Boron	ppm	ASTM D5185(m)	78	60	65	78
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	1	<1	<1
Calcium	ppm	ASTM D5185(m)	113	105	77	6
Phosphorus	ppm	ASTM D5185(m)	222	212	232	204
Zinc	ppm	ASTM D5185(m)		8	7	6
Sulfur	ppm	ASTM D5185(m)	1326	1756	2112	2944
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	32.1	34.8	36.7
Visc @ 100°C	cSt	ASTM D7279(m)	7.0	6.7	6.9	7.4
Viscosity Index (VI)	Scale	ASTM D2270*	167	172	162	172

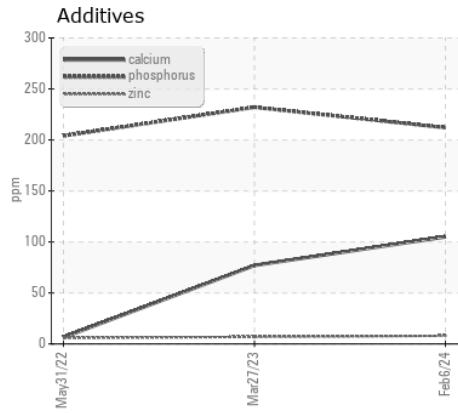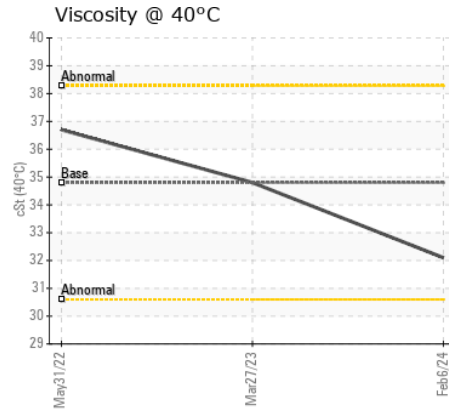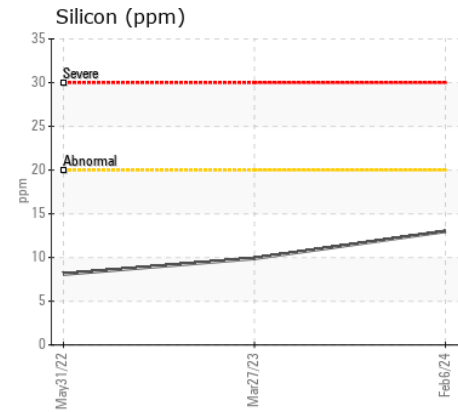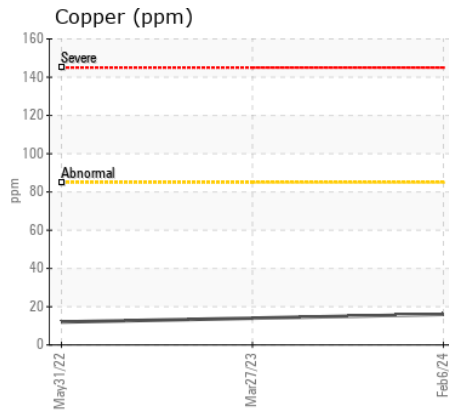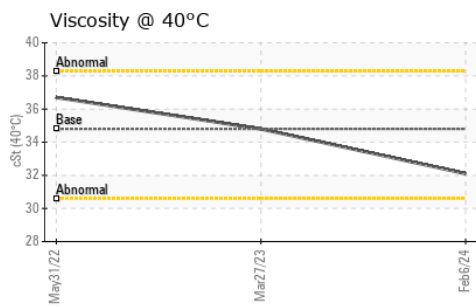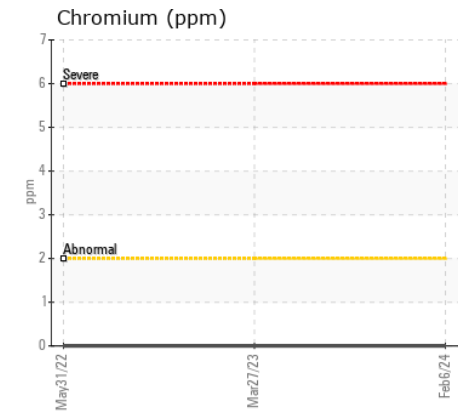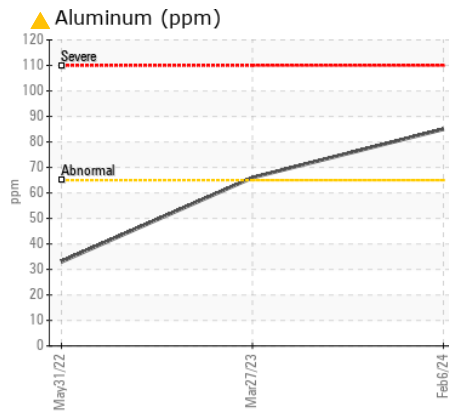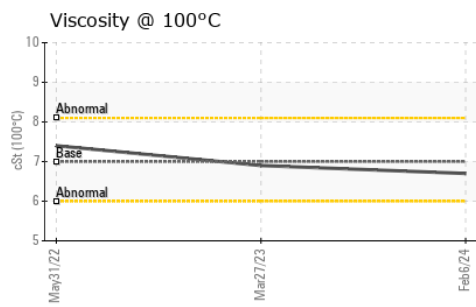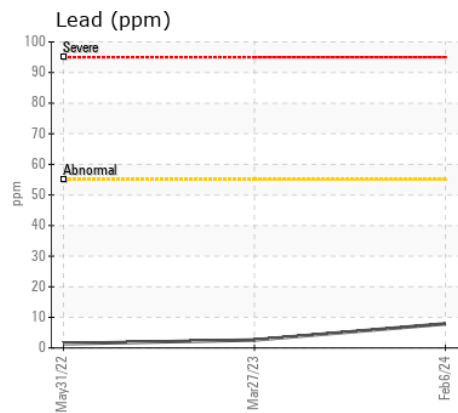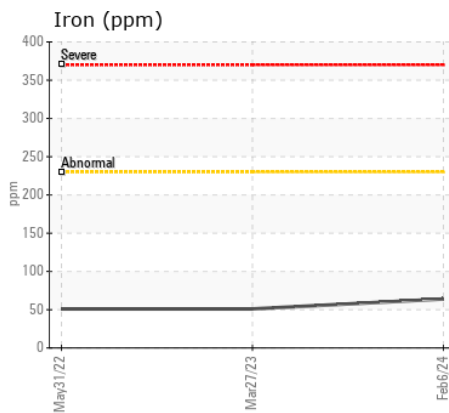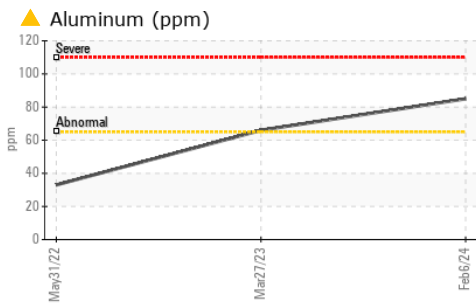

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0082739 **Received** : 23 Feb 2024
Lab Number : 02617698 **Tested** : 23 Feb 2024
Unique Number : 5734808 **Diagnosed** : 23 Feb 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: KV100, VI)

Metrobus Transit
 25 Messenger Drive
 St. John's, NL
 CA A1B 0H6
 Contact: Dan Finlay
 dan.finlay@metrobus.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.