



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**JOHN DEERE 844K Series II 19052**

Component  
**Transmission (Manual)**

Fluid  
**VALPAR TRANSMISSION/DIFFERENTIAL OIL J20C (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0872151	---	---
Sample Date		Client Info		22 Feb 2024	---	---
Machine Age	hrs	Client Info		8050	---	---
Oil Age	hrs	Client Info		1781	---	---
Filter Age	hrs	Client Info		1781	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	42	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>7	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>25	2	---	---
Lead	ppm	ASTM D5185(m)	>45	<1	---	---
Copper	ppm	ASTM D5185(m)	>225	12	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>125	6	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	---	---
Boron	ppm	ASTM D5185(m)		3	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		1	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		40	---	---
Calcium	ppm	ASTM D5185(m)		3250	---	---
Phosphorus	ppm	ASTM D5185(m)		1191	---	---
Zinc	ppm	ASTM D5185(m)		1240	---	---
Sulfur	ppm	ASTM D5185(m)		3570	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		50.4	---	---

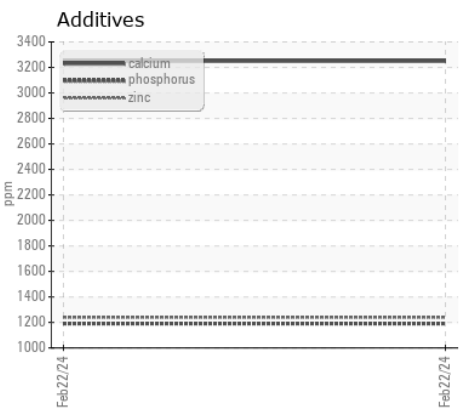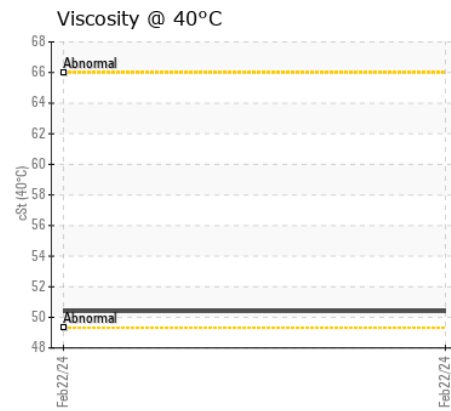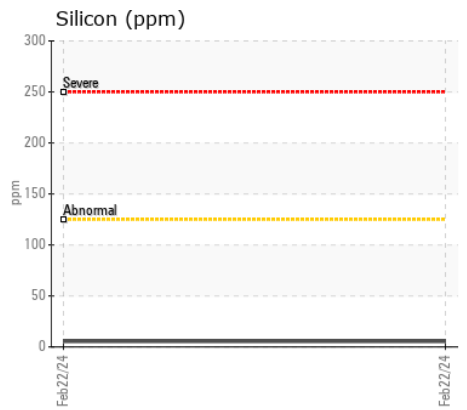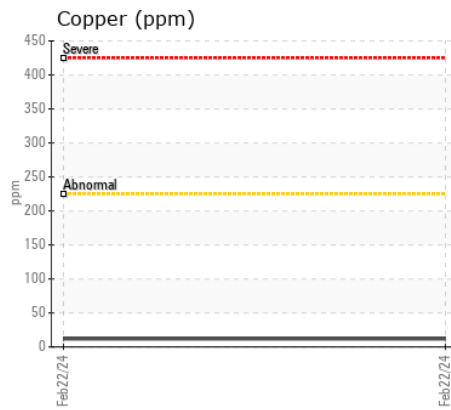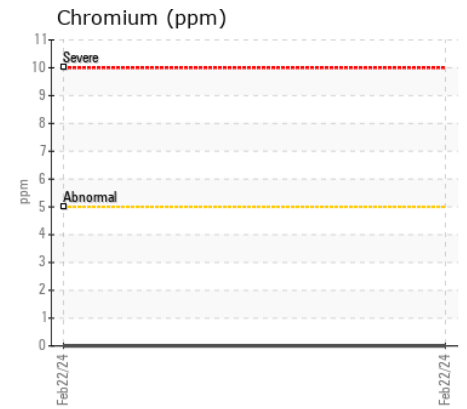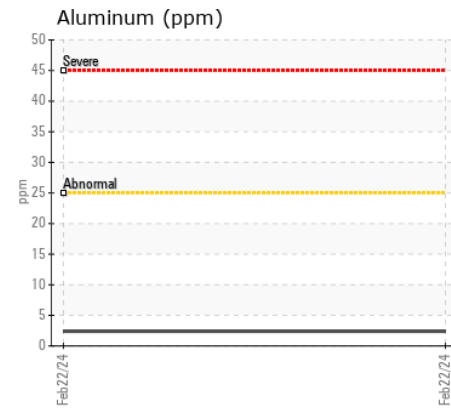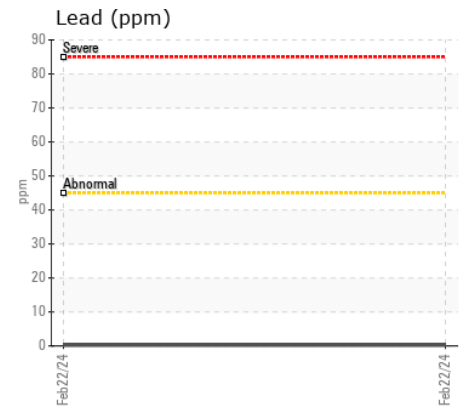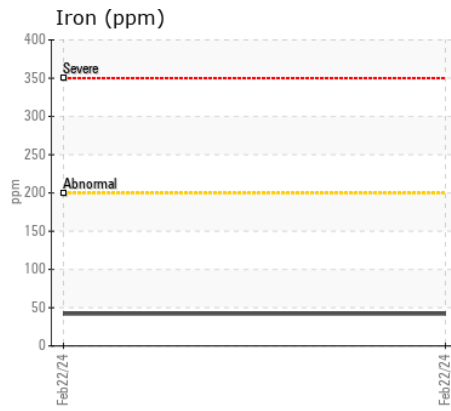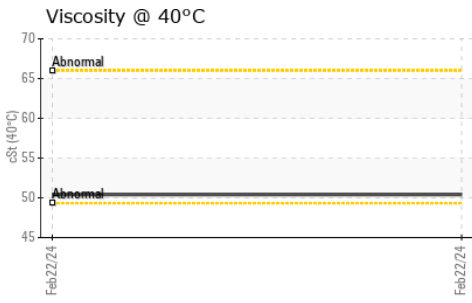

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0872151 **Received** : 23 Feb 2024  
**Lab Number** : 02617702 **Tested** : 23 Feb 2024  
**Unique Number** : 5734812 **Diagnosed** : 23 Feb 2024 - Kevin Marson  
**Test Package** : MOB 1

**BRANTCO CONSTRUCTION**  
 1555 BISHOP STREET UNIT 1  
 CAMBRIDGE, ON  
 CA N1R 7J4  
 Contact: Joe Cunha  
 jcunha@brantco.ca  
 T: (519)223-0397  
 F: (519)622-2443

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.