



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
059596-194

Component
Splitter Box

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (3 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0285116	LH0274782	LH0256519
Sample Date		Client Info		07 Feb 2024	23 Nov 2023	21 Mar 2023
Machine Age	hrs	Client Info		19498	19244	18037
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>275	39	2	119
Chromium	ppm	ASTM D5185(m)	>5	<1	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		<1	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>5	0	<1	<1
Copper	ppm	ASTM D5185(m)	>40	<1	15	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	3	3	9
Potassium	ppm	ASTM D5185(m)	>20	<1	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<1	<1	<1
Boron	ppm	ASTM D5185(m)	328	286	297	276
Barium	ppm	ASTM D5185(m)	1	0	<1	0
Molybdenum	ppm	ASTM D5185(m)		<1	0	6
Manganese	ppm	ASTM D5185(m)		0	0	1
Magnesium	ppm	ASTM D5185(m)	1	10	<1	86
Calcium	ppm	ASTM D5185(m)	7	25	6	114
Phosphorus	ppm	ASTM D5185(m)	1145	1257	1222	1394
Zinc	ppm	ASTM D5185(m)	3	36	16	121
Sulfur	ppm	ASTM D5185(m)	17909	20192	20593	19956
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	94.4	106	90.2

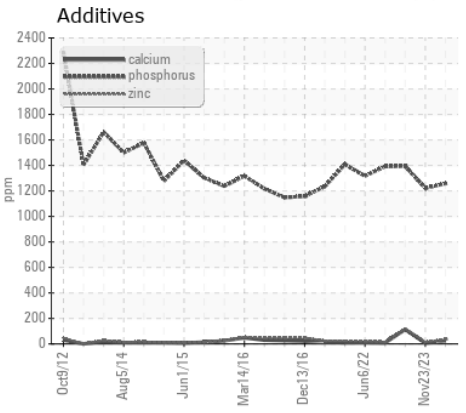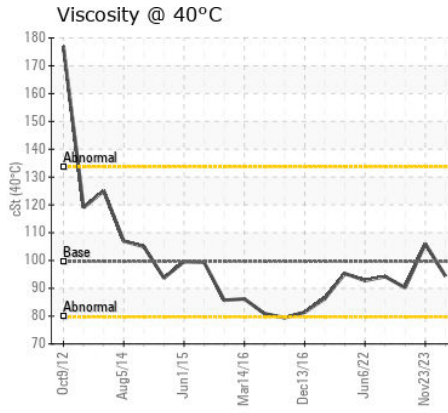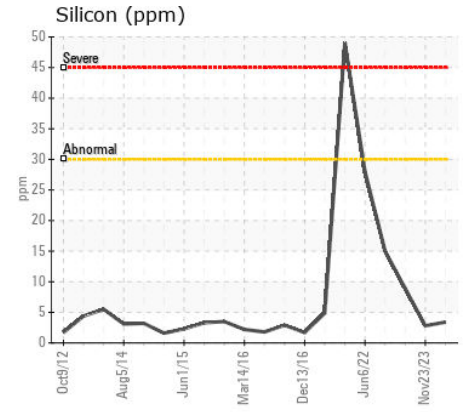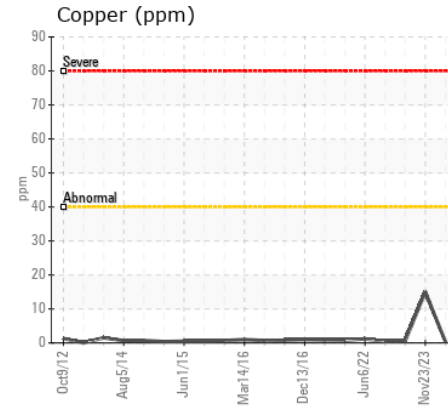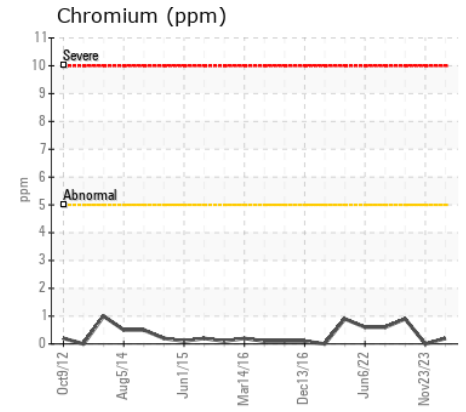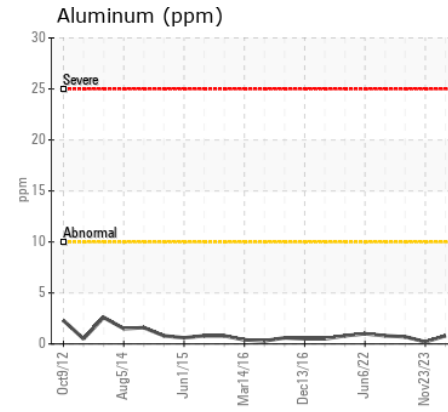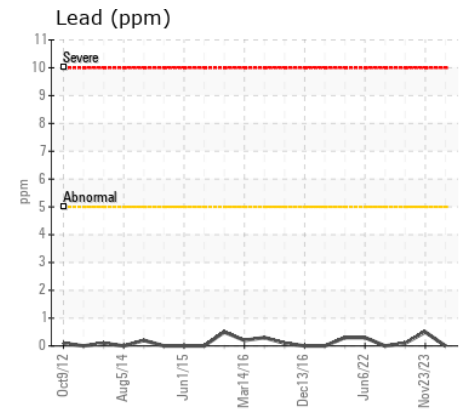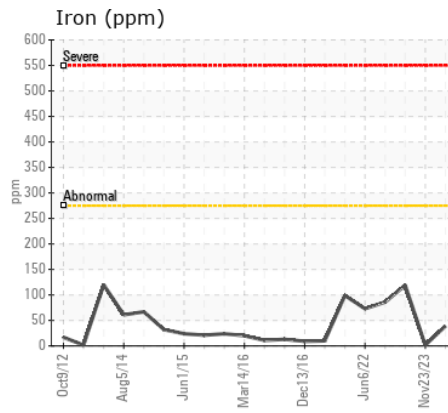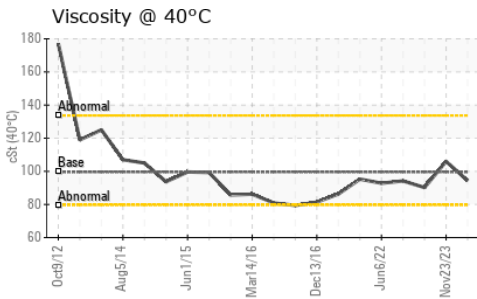

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0285116 **Received** : 23 Feb 2024
Lab Number : 02617716 **Tested** : 23 Feb 2024
Unique Number : 5734826 **Diagnosed** : 23 Feb 2024 - Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

American Iron and Metal
 2555 Sheffield Road
 Ottawa, ON
 CA K1B 3V6
 Contact: Dan Dupelle
 ddupelle@aim-rg.com
 T: (613)228-9380
 F: (613)745-0692