



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 844K Series II 19052

Component
Front Differential

Fluid
VALPAR TRANSMISSION/DIFFERENTIAL OIL J20C (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0872150	---	---
Sample Date		Client Info		22 Feb 2024	---	---
Machine Age	hrs	Client Info		8050	---	---
Oil Age	hrs	Client Info		1780	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>1501	146	---	---
Chromium	ppm	ASTM D5185(m)	>11	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>21	2	---	---
Lead	ppm	ASTM D5185(m)	>51	10	---	---
Copper	ppm	ASTM D5185(m)	>101	89	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>31	9	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>51	<1	---	---
Boron	ppm	ASTM D5185(m)		5	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		3	---	---
Manganese	ppm	ASTM D5185(m)		2	---	---
Magnesium	ppm	ASTM D5185(m)		29	---	---
Calcium	ppm	ASTM D5185(m)		3301	---	---
Phosphorus	ppm	ASTM D5185(m)		1285	---	---
Zinc	ppm	ASTM D5185(m)		1325	---	---
Sulfur	ppm	ASTM D5185(m)		4303	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		54.5	---	---

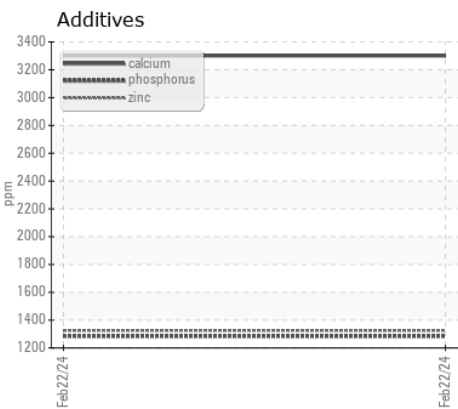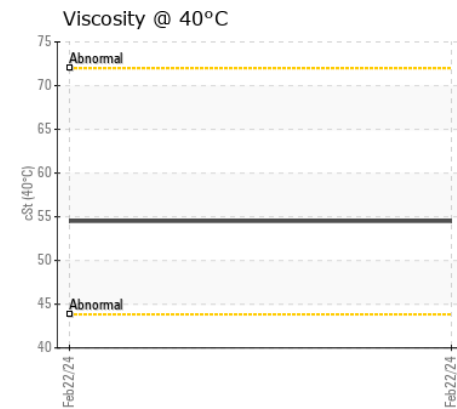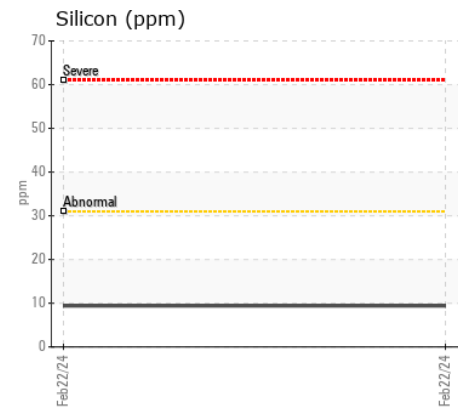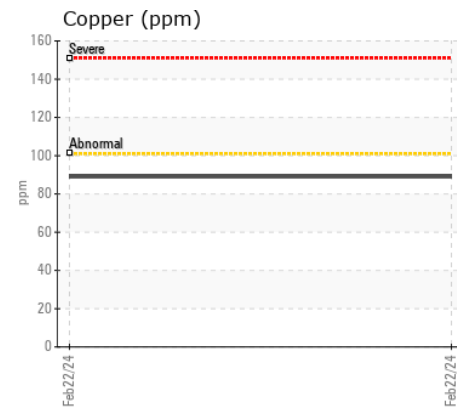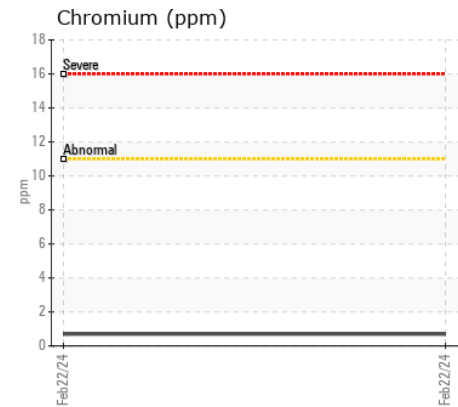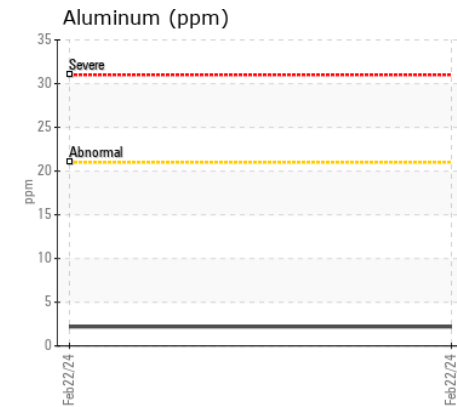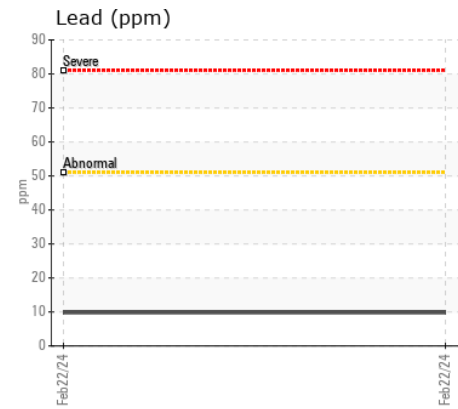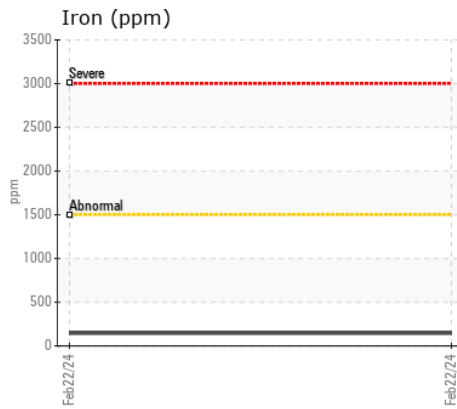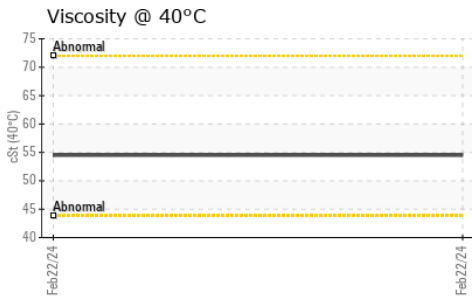

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0872150 **Received** : 23 Feb 2024
Lab Number : 02617719 **Tested** : 23 Feb 2024
Unique Number : 5734829 **Diagnosed** : 23 Feb 2024 - Wes Davis
Test Package : MOB 1

BRANTCO CONSTRUCTION
 1555 BISHOP STREET UNIT 1
 CAMBRIDGE, ON
 CA N1R 7J4
 Contact: Joe Cunha
 jcunha@brantco.ca
 T: (519)223-0397
 F: (519)622-2443

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.