



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
801065
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (20 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110731	GFL0097453	GFL0085688
Sample Date		Client Info		21 Feb 2024	29 Nov 2023	06 Sep 2023
Machine Age	hrs	Client Info		8322	8322	8322
Oil Age	hrs	Client Info		8322	8322	8322
Filter Age	hrs	Client Info		8322	8322	8322
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	9	13	8
Chromium	ppm	ASTM D5185(m)	>20	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	2	1	<1
Lead	ppm	ASTM D5185(m)	>40	0	0	0
Copper	ppm	ASTM D5185(m)	>330	1	1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	7	18
Potassium	ppm	ASTM D5185(m)	>20	1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.3	0.2
Nitration	Abs/cm	ASTM D7624*	>20	8.6	8.5	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	19.5	19.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)	0	2	2	2
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	57	57	57
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	910	918	930
Calcium	ppm	ASTM D5185(m)	1070	999	1021	1002
Phosphorus	ppm	ASTM D5185(m)	1150	952	956	1009
Zinc	ppm	ASTM D5185(m)	1270	1133	1170	1153
Sulfur	ppm	ASTM D5185(m)	2060	2488	2329	2413
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.7	16.1	15.2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.3	13.1	13.5

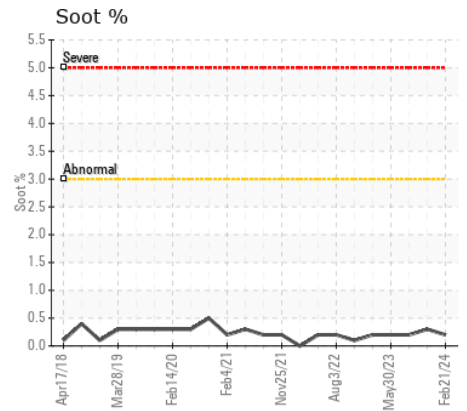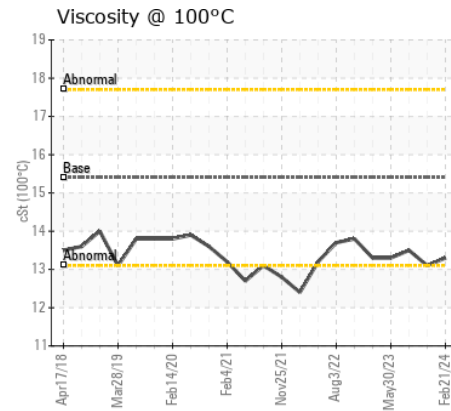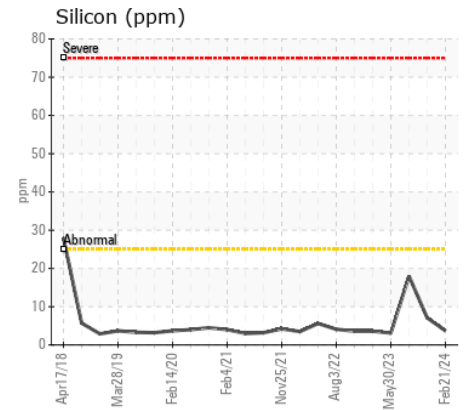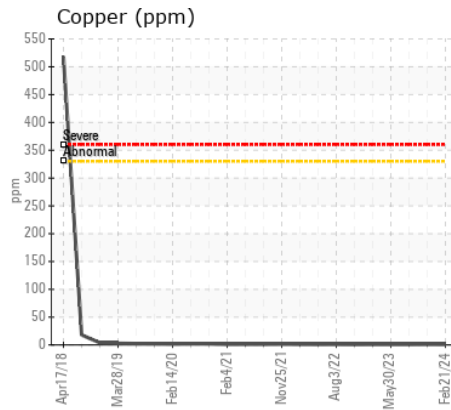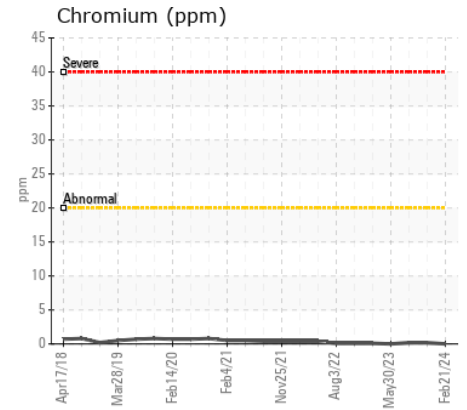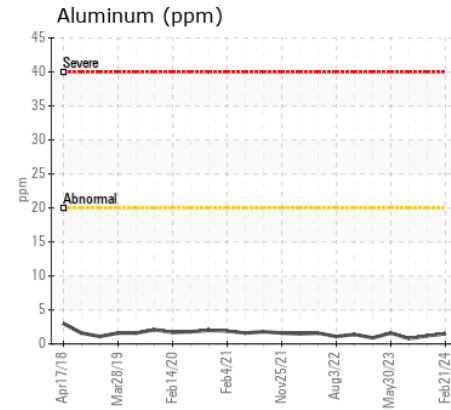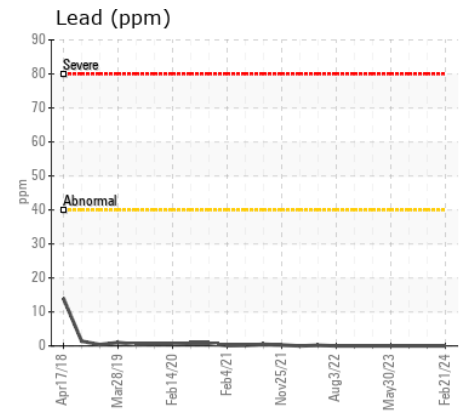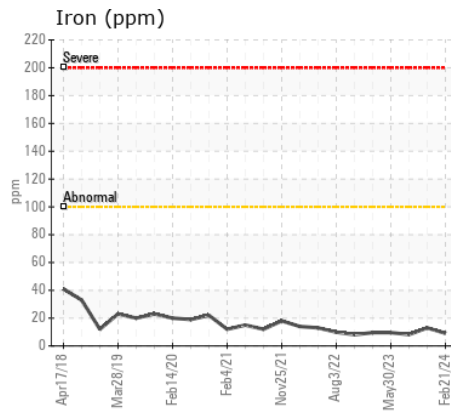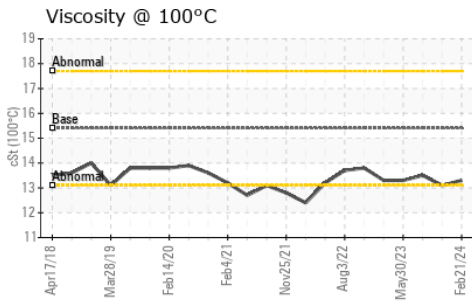

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0110731
Lab Number : 02617944
Unique Number : 5735054
Test Package : MOB 1

GFL Environmental - 221 - Windsor
 905 Tecumseh Road W
 Windsor, ON
 CA N8W 4J5
 Contact: Rhys Marotte
 rmarotte@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: