



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[DIETRICH]
 Machine Id
JOHN DEERE JOHN DEERE 4360R
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0824306	---	---
Sample Date		Client Info		21 Feb 2024	---	---
Machine Age	hrs	Client Info		4870	---	---
Oil Age	hrs	Client Info		40	---	---
Filter Age	hrs	Client Info		40	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>51	42	---	---
Chromium	ppm	ASTM D5185(m)	>11	1	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		<1	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>31	3	---	---
Lead	ppm	ASTM D5185(m)	>26	<1	---	---
Copper	ppm	ASTM D5185(m)	>26	2	---	---
Tin	ppm	ASTM D5185(m)	>4	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>22	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.8	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.7	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.21	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>31	6	---	---
Boron	ppm	ASTM D5185(m)	0	4	---	---
Barium	ppm	ASTM D5185(m)	0	0	---	---
Molybdenum	ppm	ASTM D5185(m)	60	58	---	---
Manganese	ppm	ASTM D5185(m)	0	0	---	---
Magnesium	ppm	ASTM D5185(m)	1010	929	---	---
Calcium	ppm	ASTM D5185(m)	1070	1047	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	997	---	---
Zinc	ppm	ASTM D5185(m)	1270	1136	---	---
Sulfur	ppm	ASTM D5185(m)	2060	2727	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.1	---	---

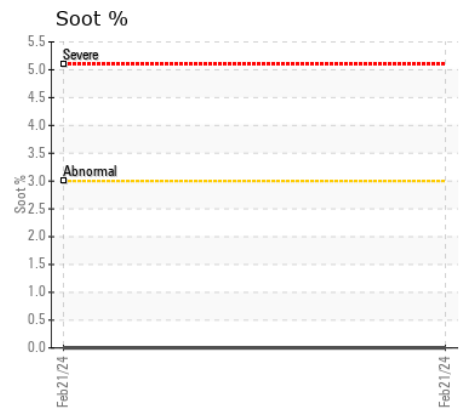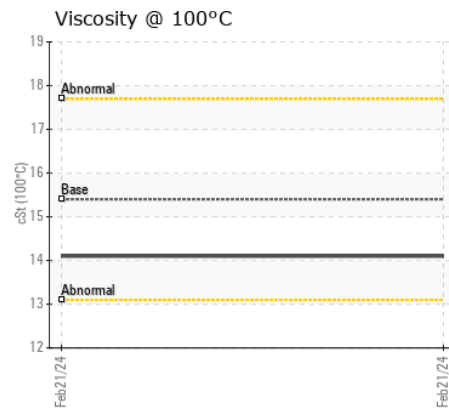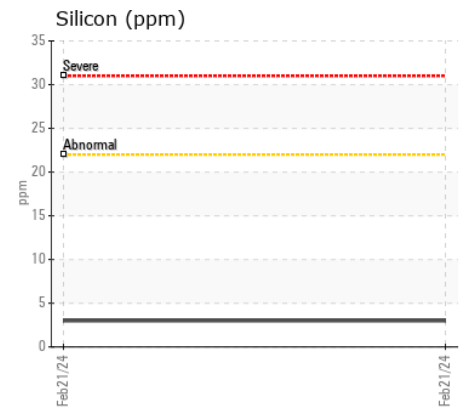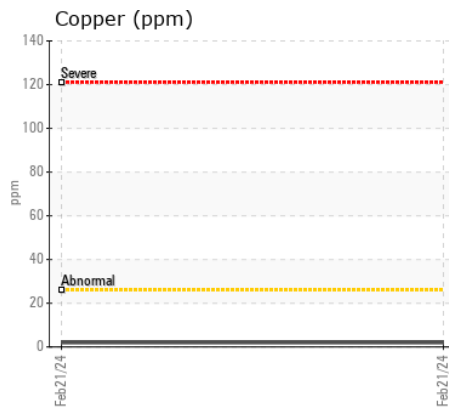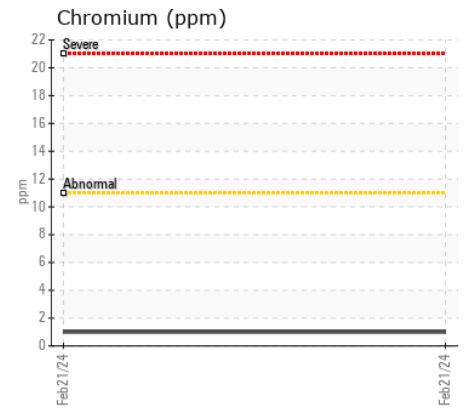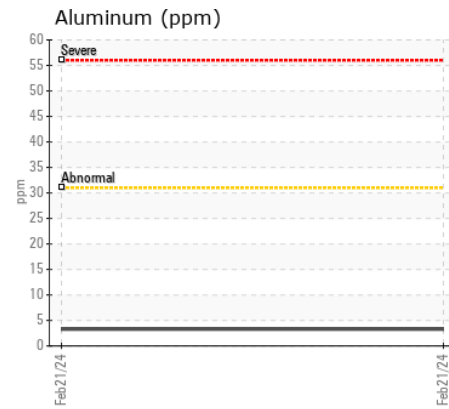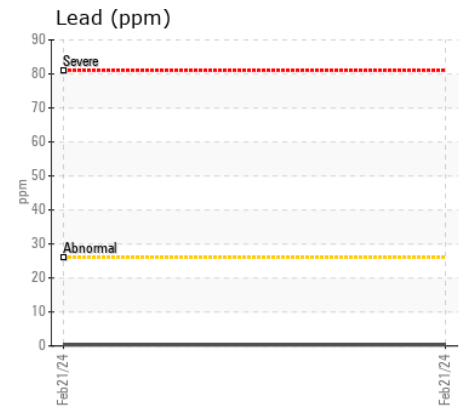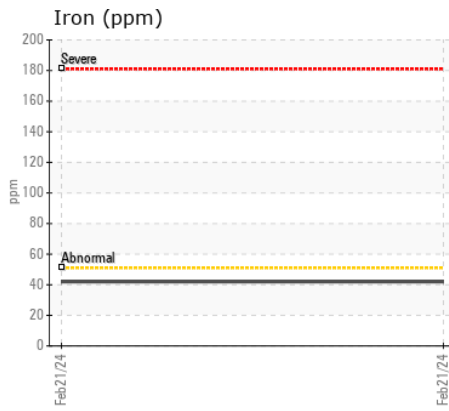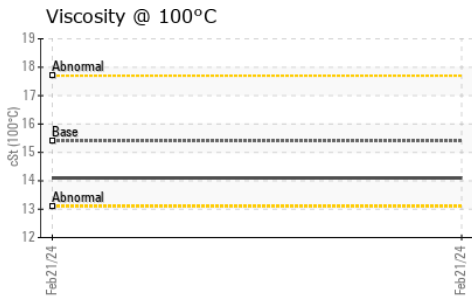

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0824306 **Received** : 26 Feb 2024
Lab Number : 02617959 **Tested** : 26 Feb 2024
Unique Number : 5735069 **Diagnosed** : 26 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

PROMECHANICAL
 33422 ROMAN LINE, RR # 3
 LUCAN, ON
 CA N0M 2J0
 Contact: Jody Regier
 promechanical@hotmail.com
 T: (519)227-0077
 F: (519)227-0786

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.