



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**(C-FTJX)**  
Machine Id  
**[C-FTJX] PIPER PA31-350 L1971-68A**  
Component  
**Right Piston Aircraft Engine**  
Fluid  
**PHILLIPS 66 AVIATION X/C OIL SAE20W50 (12 LTR)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0838452</b>	WC0323400	WC0830822
Sample Date		Client Info		<b>21 Feb 2024</b>	30 Nov 2023	08 Sep 2023
TSN	hrs	Client Info		<b>0</b>	11402	0
TSO	hrs	Client Info		<b>2179</b>	2024	1827
Oil Age	hrs	Client Info		<b>54</b>	42	52
Filter Age	hrs	Client Info		<b>54</b>	42	52
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	<b>33</b>	27	27
Chromium	ppm	ASTM D5185(m)	>20	<b>6</b>	9	11
Nickel	ppm	ASTM D5185(m)	>15	<b>7</b>	11	7
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>25	<b>6</b>	6	11
Lead	ppm	ASTM D5185(m)	>20000	<b>7765</b>	7419	7251
Copper	ppm	ASTM D5185(m)	>25	<b>7</b>	6	8
Tin	ppm	ASTM D5185(m)	>30	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	<b>6</b>	8	5
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>VLITE</b>	NONE	LIGHT
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	.2%	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Boron	ppm	ASTM D5185(m)	0.0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	0.0	<b>5</b>	5	2
Calcium	ppm	ASTM D5185(m)	4.7	<b>&lt;1</b>	2	<1
Phosphorus	ppm	ASTM D5185(m)	0.0	<b>0</b>	<1	<1
Zinc	ppm	ASTM D5185(m)	0.1	<b>2</b>	5	7
Sulfur	ppm	ASTM D5185(m)	848	<b>1045</b>	996	972
Visc @ 100°C	cSt	ASTM D7279(m)	20.2	<b>21.3</b>	20.4	22.1

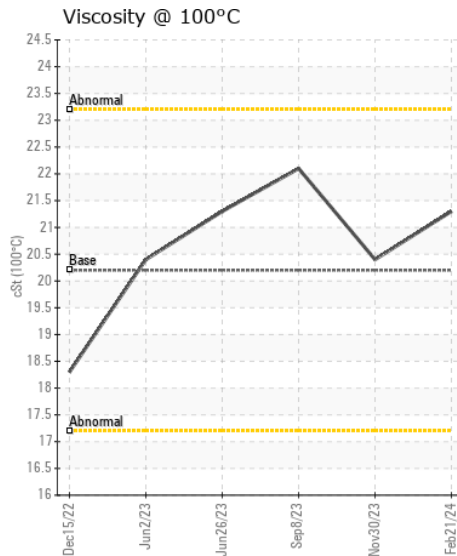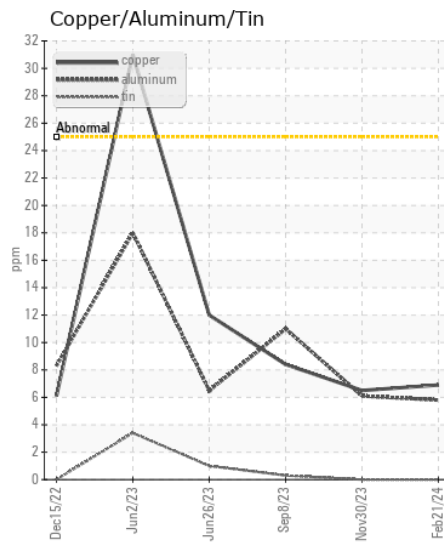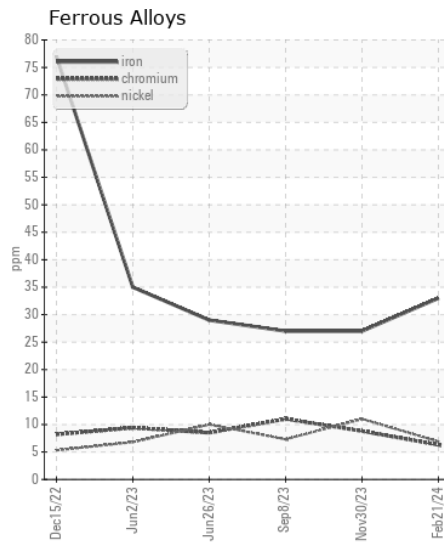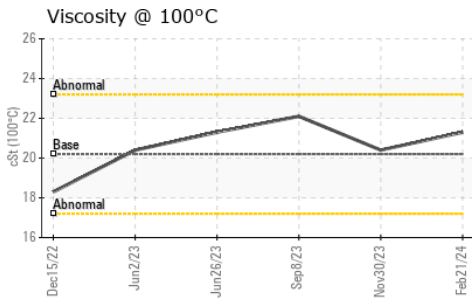

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0838452  
**Lab Number** : 02618019  
**Unique Number** : 5735129  
**Test Package** : AVI 1  
**Received** : 26 Feb 2024  
**Tested** : 26 Feb 2024  
**Diagnosed** : 26 Feb 2024 - Kevin Marson

**SKYCAR AIR AMBULANCE**  
 BOX 289, 17 AIRPORT ROAD  
 SIOUX LOOKOUT, ON  
 CA P8T 1A3  
 Contact: Jason Murphy  
 prm@skycare.ca  
 T: (807)737-0039  
 F: (807)737-0040

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.