



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**JACOB HULSE [OR00037946]**  
 Machine Id  
**JOHN DEERE H09500X667399**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC</b>	---	---
Sample Date		Client Info		<b>06 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5660</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>Not Changd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>51	<b>2</b>	---	---
Chromium	ppm	ASTM D5185(m)	>11	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>31	<b>4</b>	---	---
Lead	ppm	ASTM D5185(m)	>26	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>26	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>22	<b>9</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.21	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>5.4</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.2</b>	---	---
Emulsified Water	scalar	Visual*	>0.21	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>31	<b>1</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>244</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>244</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>796</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>1324</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>845</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>947</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2603</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.2</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>15.9</b>	---	---

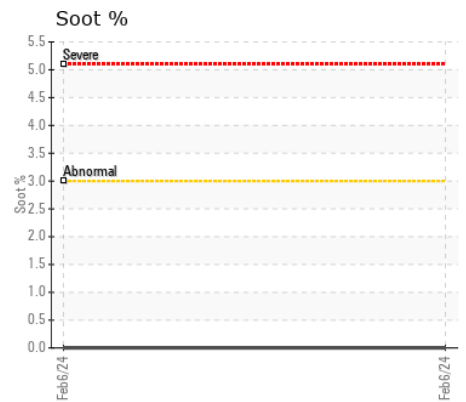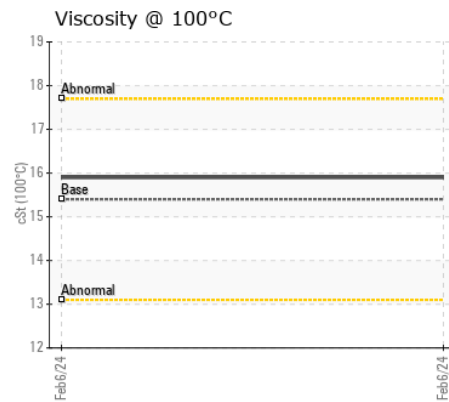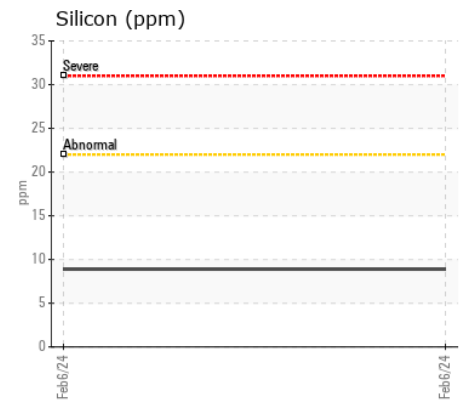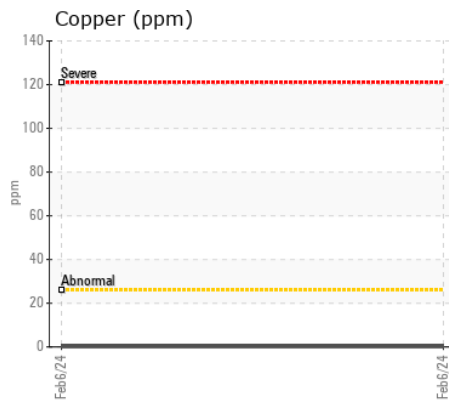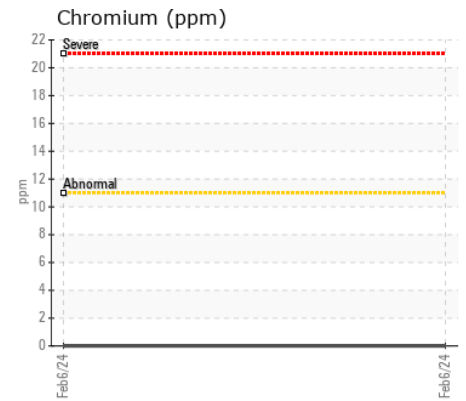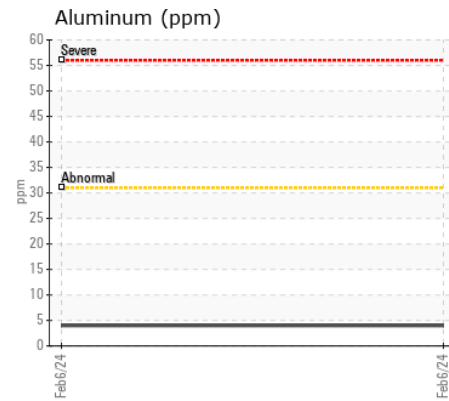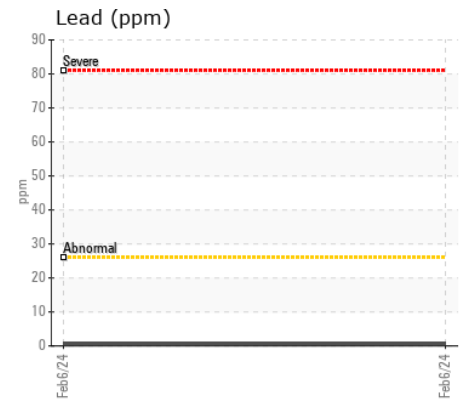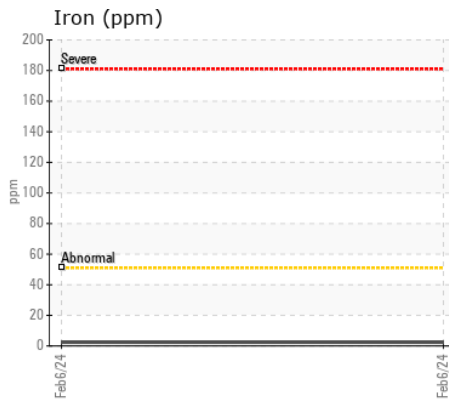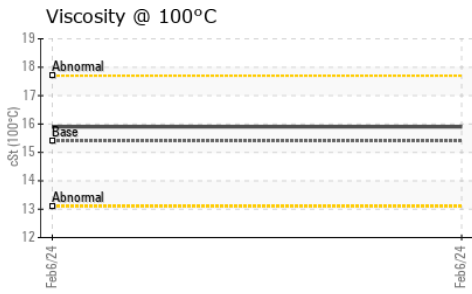

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02618322  
**Unique Number** : 5735432  
**Test Package** : MOB 1  
**Received** : 27 Feb 2024  
**Tested** : 27 Feb 2024  
**Diagnosed** : 27 Feb 2024 - Wes Davis

**Green Tractors**  
 6770 King Road West  
 Nobleton, ON  
 CA L0G 1N0  
 Contact: Norm  
 norm@greentractors.ca  
 T: (905)859-0581  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.