



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[8-390659]

Machine Id
633406

Component
Transmission (Auto)

Fluid
VOLVO EXTRA AUTOMATIC FLUID (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP393160	VCP394796	---
Sample Date		Client Info		16 Jan 2024	12 Sep 2023	---
Machine Age	hrs	Client Info		914	509	---
Oil Age	hrs	Client Info		1000	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	29	20	---
Chromium	ppm	ASTM D5185(m)	>5	0	<1	---
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>50	3	1	---
Lead	ppm	ASTM D5185(m)	>50	<1	0	---
Copper	ppm	ASTM D5185(m)	>225	3	3	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	8	7	---
Potassium	ppm	ASTM D5185(m)	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	---
Boron	ppm	ASTM D5185(m)		78	77	---
Barium	ppm	ASTM D5185(m)		2	2	---
Molybdenum	ppm	ASTM D5185(m)		0	<1	---
Manganese	ppm	ASTM D5185(m)		4	4	---
Magnesium	ppm	ASTM D5185(m)		2	2	---
Calcium	ppm	ASTM D5185(m)		75	73	---
Phosphorus	ppm	ASTM D5185(m)		193	195	---
Zinc	ppm	ASTM D5185(m)		12	12	---
Sulfur	ppm	ASTM D5185(m)		1742	1616	---
Visc @ 40°C	cSt	ASTM D7279(m)		29.0	31.8	---

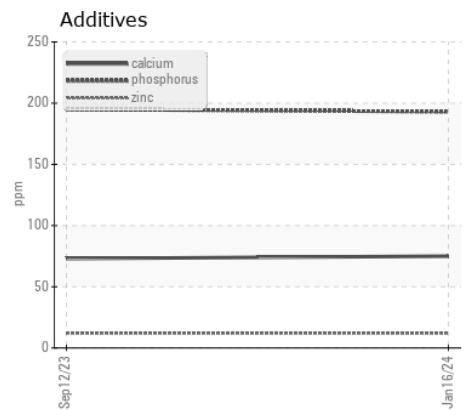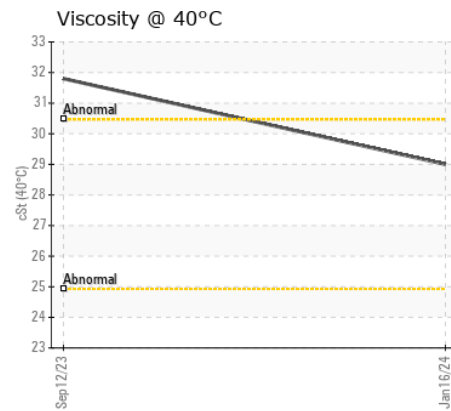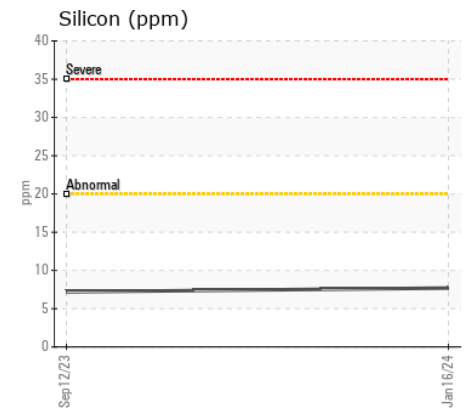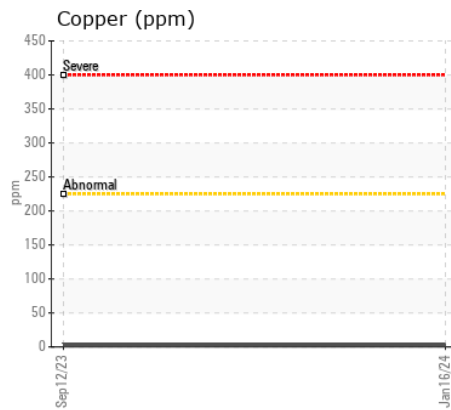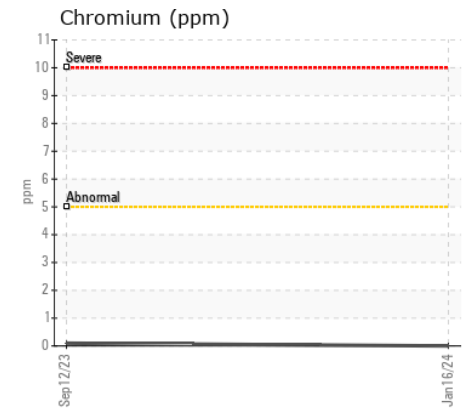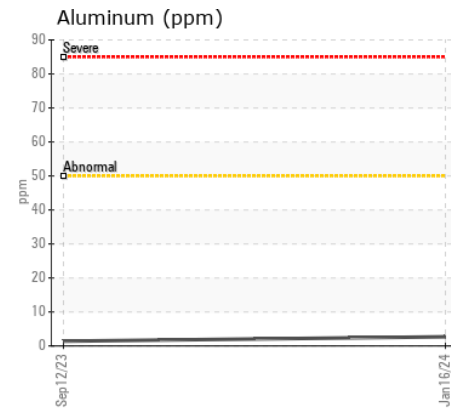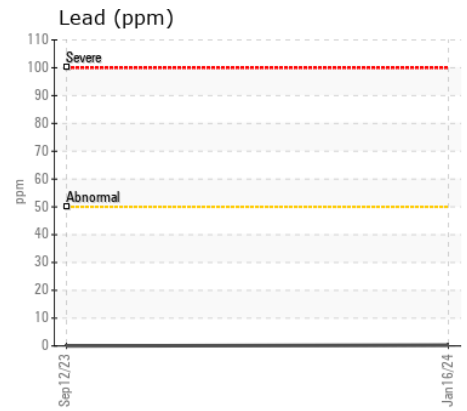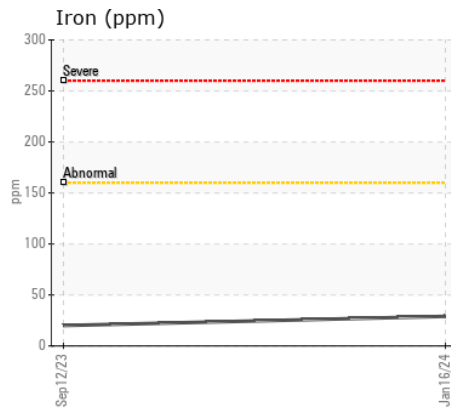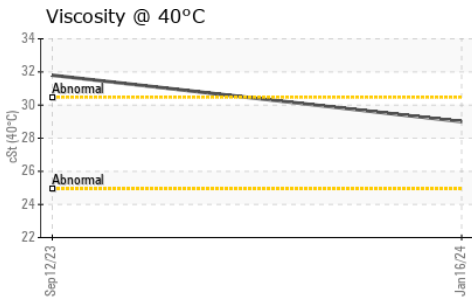

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP393160 **Received** : 27 Feb 2024
Lab Number : 02618434 **Tested** : 27 Feb 2024
Unique Number : 5735544 **Diagnosed** : 27 Feb 2024 - Wes Davis
Test Package : MOB 1

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Tim Visser
 tvisser@strongco.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.