



# COOLANT REPORT

CORROSION	<b>NORMAL</b>
CONTAMINANTS	<b>NORMAL</b>
COOLANT CONDITION	<b>NORMAL</b>

Machine Id  
**PREVOST 5604**

Component  
**Coolant**

Fluid  
**EXTENDED LIFE COOLANT (--- GAL)**

## RECOMMENDATION

The fluid is suitable for further service. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0907686</b>	---	---
Sample Date		Client Info		<b>16 Feb 2024</b>	---	---
Machine Age	kms	Client Info		<b>300</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## CORROSION

All metal levels are normal indicating no corrosion in the cooling system.

Iron	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Zinc	ppm	ASTM D5185(m)	>10	<b>2</b>	---	---

## CONTAMINANTS








There is no indication of any contamination in the coolant.

Calcium	ppm	ASTM D5185(m)	>100	<b>7</b>	---	---
Magnesium	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Coolant Appearance		Visual*	Clear	<b>Clear</b>	---	---

## COOLANT CONDITION

The pH level of this fluid is within the acceptable limits. The reserve alkalinity of this fluid is acceptable.

Specific Gravity		ASTM D1298*		<b>1.067</b>	---	---
pH	Scale 0-14	ASTM D1287*	9.0	<b>7.97</b>	---	---
Nitrites	ppm	Alcan Test Kit*		<b>2800</b>	---	---
Reserve Alkalinity	Scale 0-20	ASTM D1121*		<b>6.1</b>	---	---
Percentage Glycol	%	ASTM D3321*	50	<b>49.7</b>	---	---
Freezing Point	°C	ASTM D3321*	-40	<b>-36</b>	---	---
Carboxylate				<b>---</b>	---	---
Silicon	ppm	ASTM D5185(m)		<b>65</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>56</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>452</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>102</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>7918</b>	---	---
Potassium	ppm	ASTM D5185(m)		<b>155</b>	---	---
Coolant Color		Visual*	Orange/R	<b>Red</b>	---	---

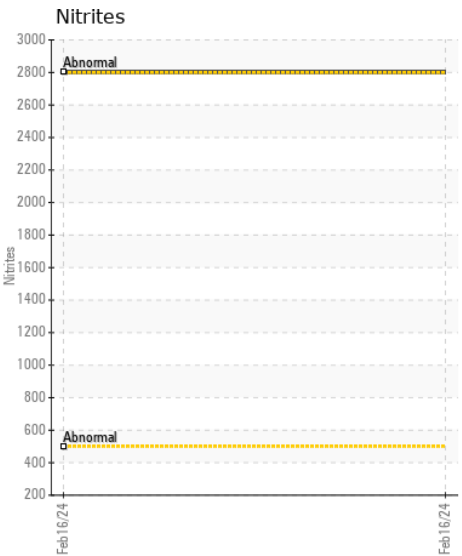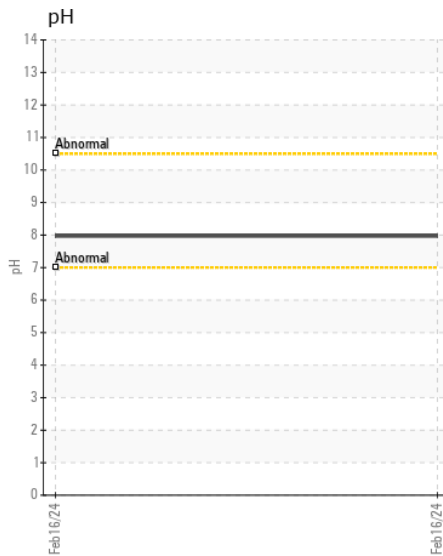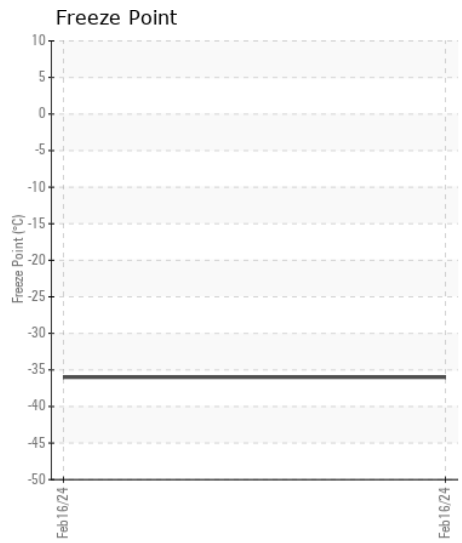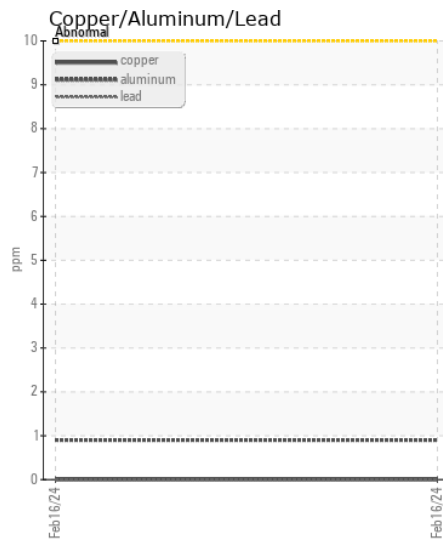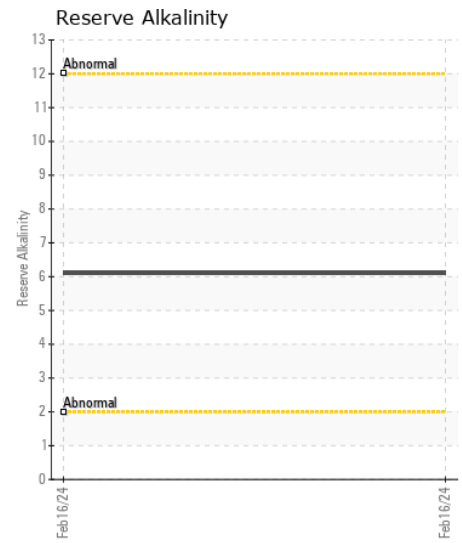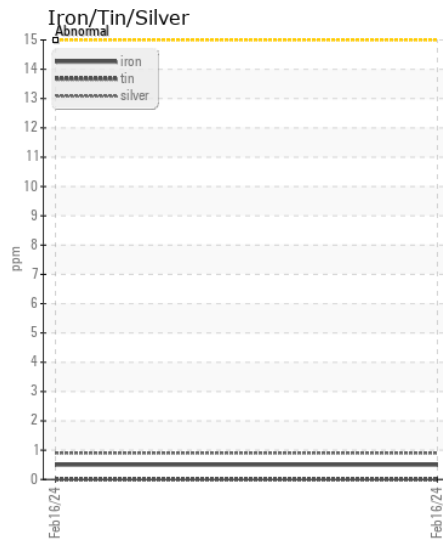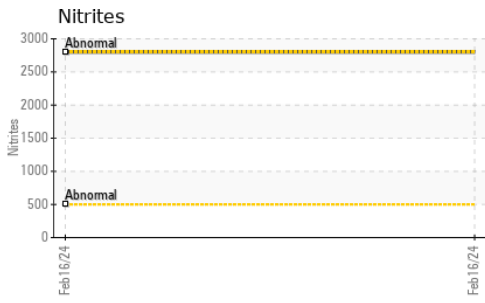

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0907686  
**Lab Number** : 02618510  
**Unique Number** : 5735620  
**Test Package** : COOL ( Additional Tests: GlycolType )

**ONTARIO NORTHLAND COMMISSION**  
 567 WALLACE RD  
 NORTH BAY, ON  
 CA P1A 3T3  
 Contact: Scott Curran  
 scott.curran@ontarionorthland.ca  
 T: (705)499-5184  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.