

Machine Id
7761
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (40 LTR)

RECOMMENDATION

Check for low coolant level. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113183	GFL0104505	GFL0093635
Sample Date		Client Info		23 Feb 2024	05 Dec 2023	29 Sep 2023
Machine Age	kms	Client Info		230960	227147	2231870
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>165	12	10	15
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	<1	<1
Lead	ppm	ASTM D5185(m)	>150	1	<1	3
Copper	ppm	ASTM D5185(m)	>90	1	1	3
Tin	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











Water treatment chemicals present, indicating slow coolant leak. Test for glycol is negative. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	4	3	5
Potassium	ppm	ASTM D5185(m)	>20	6	<1	4
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	ASTM D7922*		0.0	0.0	0.0
Soot %	%	ASTM D7844*	>7.5	1.2	0.7	1.1
Nitration	Abs/cm	ASTM D7624*	>20	9.9	7.8	9.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.2	20.9	22.5
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service (see recommendation).

Sodium	ppm	ASTM D5185(m)		238	107	161
Boron	ppm	ASTM D5185(m)	0	4	3	2
Barium	ppm	ASTM D5185(m)	0	0	<1	<1
Molybdenum	ppm	ASTM D5185(m)	60	59	60	64
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	952	959	1012
Calcium	ppm	ASTM D5185(m)	1070	1064	1080	1104
Phosphorus	ppm	ASTM D5185(m)	1150	996	963	1009
Zinc	ppm	ASTM D5185(m)	1270	1173	1198	1255
Sulfur	ppm	ASTM D5185(m)	2060	2666	2495	2497
Oxidation	Abs/.1mm	ASTM D7414*	>25	16.6	15.3	17.2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.1	14.1	14.3

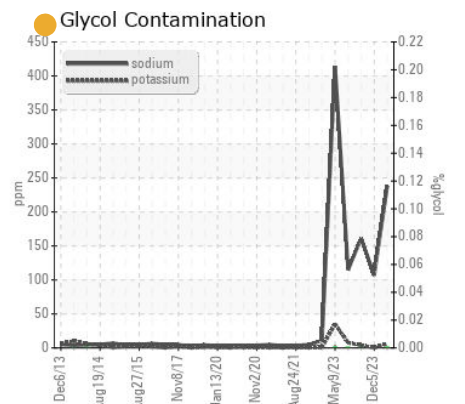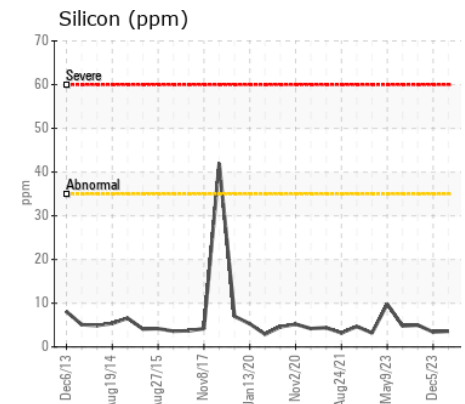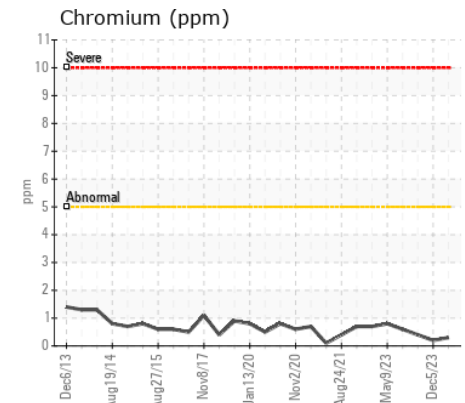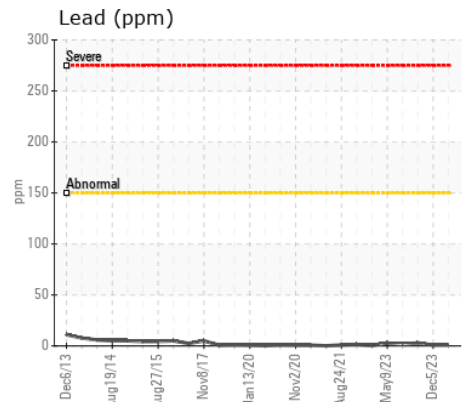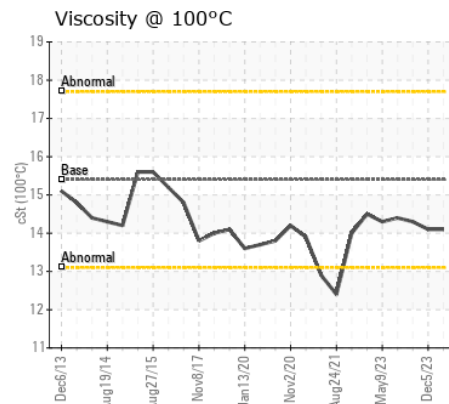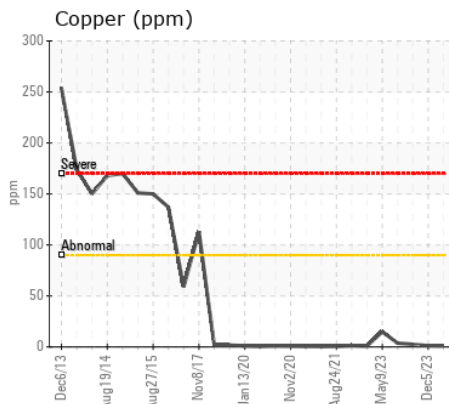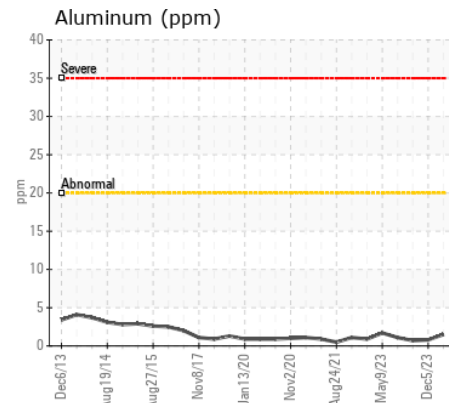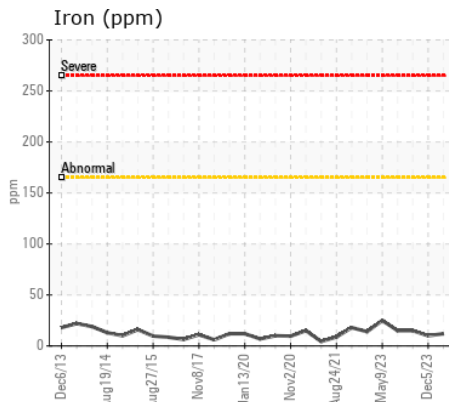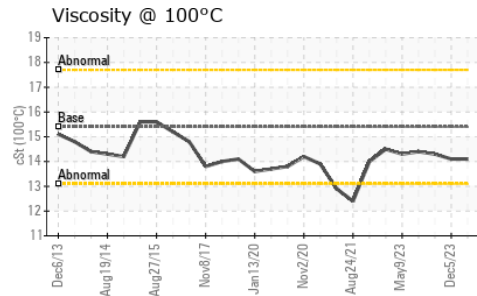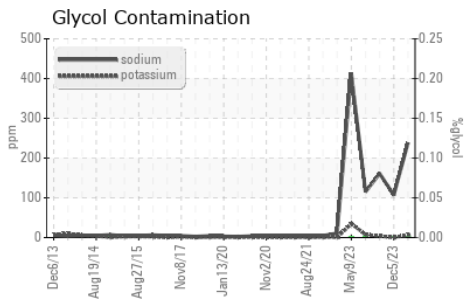

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113183 **Received** : 28 Feb 2024
Lab Number : 02618559 **Tested** : 28 Feb 2024
Unique Number : 5735669 **Diagnosed** : 29 Feb 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: Glycol)

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.