



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1360
 Component
Rear Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0905415	WC0882988	WC0864988
Sample Date		Client Info		23 Feb 2024	06 Dec 2023	19 Oct 2023
Machine Age	kms	Client Info		39820	0	490
Oil Age	kms	Client Info		969	586	0
Filter Age	kms	Client Info		969	586	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	MARGINAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	8	18	18
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	1	1	<1
Lead	ppm	ASTM D5185(m)	>40	0	<1	0
Copper	ppm	ASTM D5185(m)	>330	<1	1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	5	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Fuel		WC Method	>5	<1.0	<1.0	▲ 2.7
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.4	0.9	0.8
Nitration	Abs/cm	ASTM D7624*	>20	7.9	11.3	10.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.6	30.8	30.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		51	30	16
Boron	ppm	ASTM D5185(m)	0	2	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	60	59	57	57
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	926	892	865
Calcium	ppm	ASTM D5185(m)	1070	1004	1003	989
Phosphorus	ppm	ASTM D5185(m)	1150	969	874	834
Zinc	ppm	ASTM D5185(m)	1270	1133	1069	1074
Sulfur	ppm	ASTM D5185(m)	2060	2641	2447	2293
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.2	36.6	35.9
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	13.8	12.8	12.6

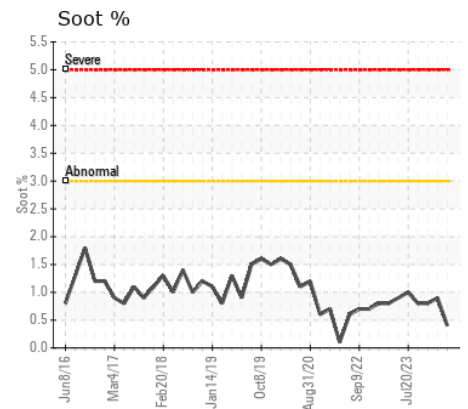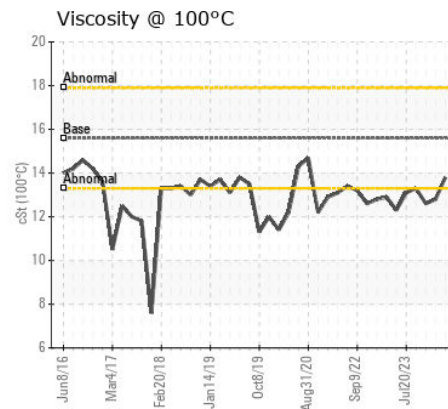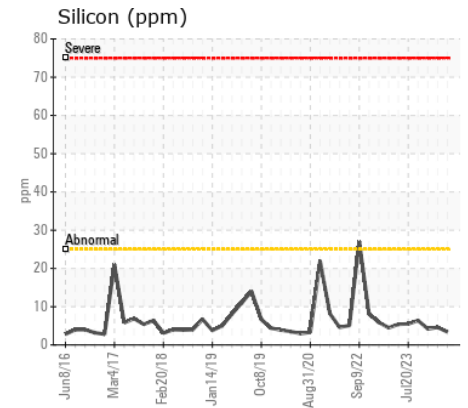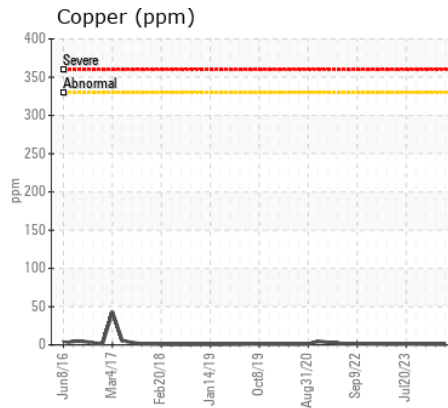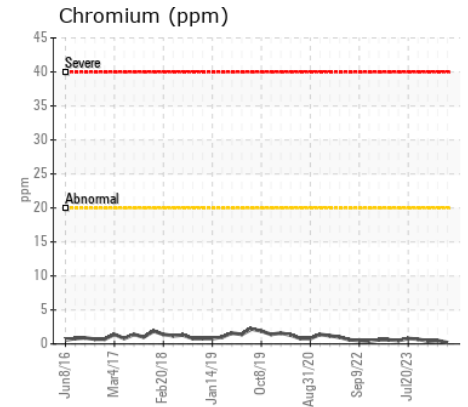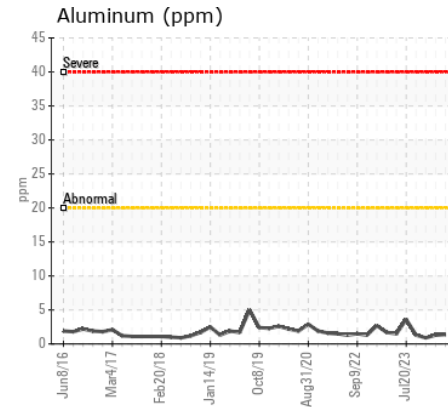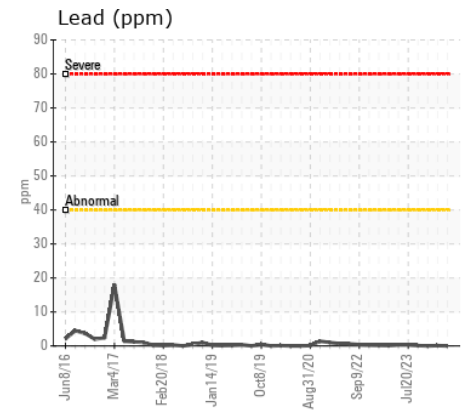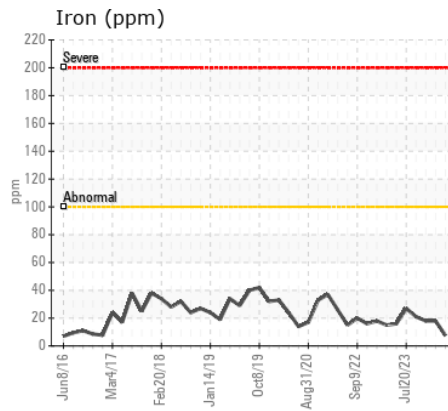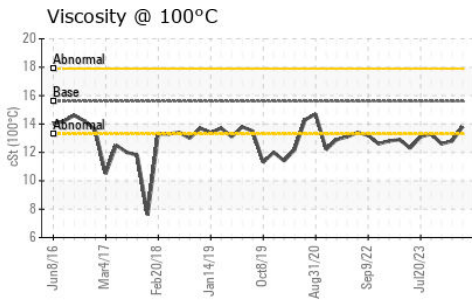

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0905415 **Received** : 28 Feb 2024
Lab Number : 02618596 **Tested** : 28 Feb 2024
Unique Number : 5735706 **Diagnosed** : 28 Feb 2024 - Wes Davis
Test Package : MOB 1

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.