

Machine Id
8269
Component
Front Diesel Engine
Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (22 LTR)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0112421	GFL0091568	GFL0077627
Sample Date		Client Info		27 Feb 2024	12 Oct 2023	18 May 2023
Machine Age	hrs	Client Info		15600	15960	304790
Oil Age	hrs	Client Info		0	0	304790
Filter Age	hrs	Client Info		0	0	304790
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				SEVERE	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>75	37	37	18
Chromium	ppm	ASTM D5185(m)	>5	2	2	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	<1	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	5	5	3
Lead	ppm	ASTM D5185(m)	>25	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>100	1	1	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	7	17	6
Potassium	ppm	ASTM D5185(m)	>20	2	<1	0
Fuel	%	ASTM D7593*	>3.0	▲ 7.4	▲ 5	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	1.8	1.6	0.7
Nitration	Abs/cm	ASTM D7624*	>20	12.9	12.8	8.7
Sulfation	Abs/.1mm	ASTM D7415*	>30	26.5	28.8	21.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		8	8	6
Boron	ppm	ASTM D5185(m)	1	2	2	2
Barium	ppm	ASTM D5185(m)	1	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	51	52	56
Manganese	ppm	ASTM D5185(m)	1	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	818	825	905
Calcium	ppm	ASTM D5185(m)	1070	971	916	1042
Phosphorus	ppm	ASTM D5185(m)	1150	866	844	998
Zinc	ppm	ASTM D5185(m)	1270	1044	1042	1102
Sulfur	ppm	ASTM D5185(m)	2060	2189	2074	2368
Oxidation	Abs/.1mm	ASTM D7414*	>25	25.1	30.3	18.0
Base Number (BN)	mg KOH/g	ASTM D2896*	9.6	7.13	5.35	8.16
Visc @ 100°C	cSt	ASTM D7279(m)	15.5	12.9	▲ 12.4	13.4

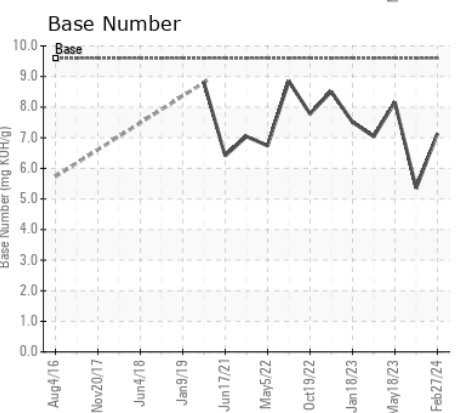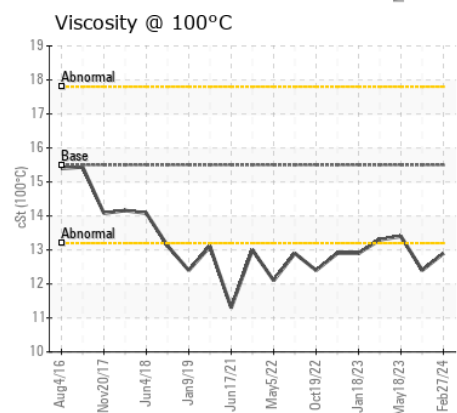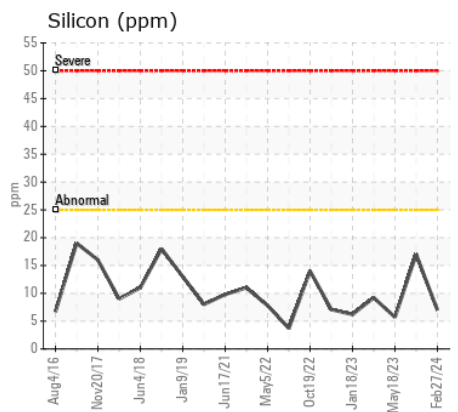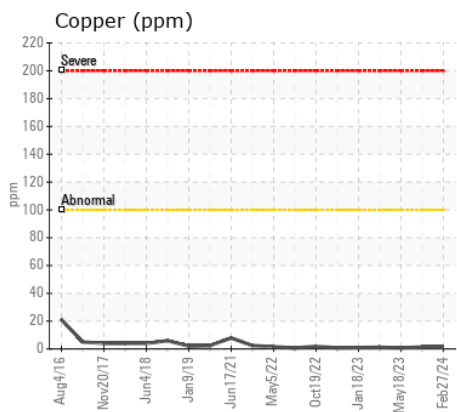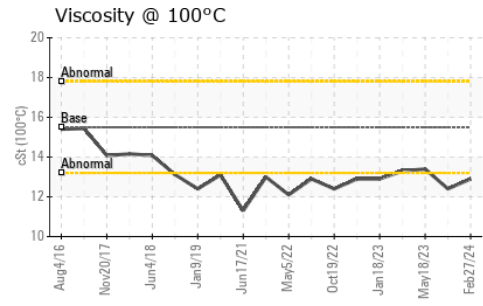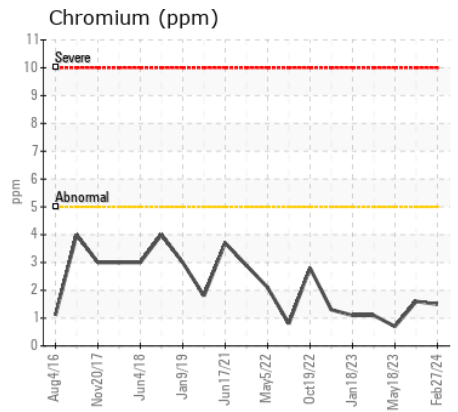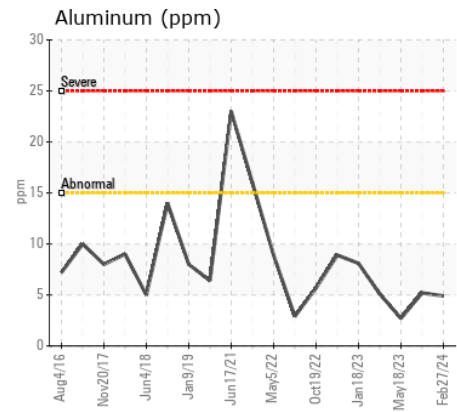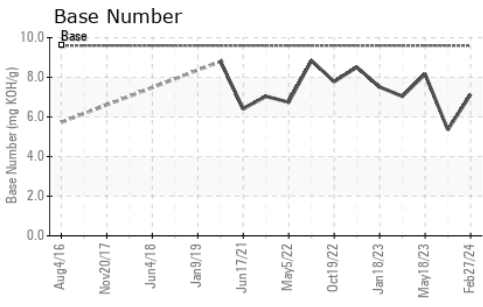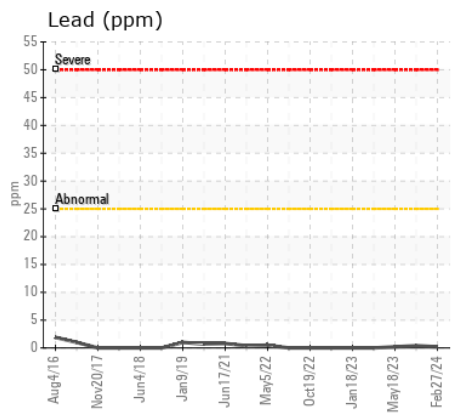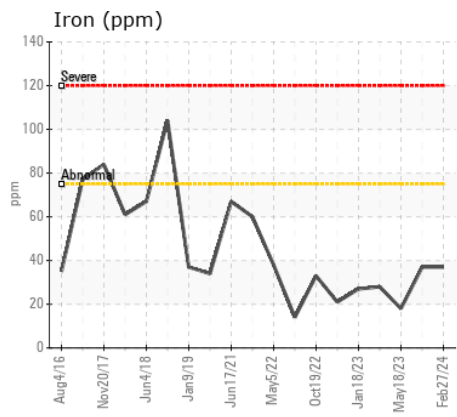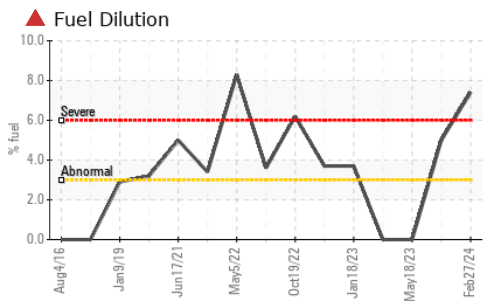

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0112421
Lab Number : 02618614
Unique Number : 5735724
Test Package : MOB 2 (Additional Tests: PercentFuel)
Received : 28 Feb 2024
Tested : 29 Feb 2024
Diagnosed : 29 Feb 2024 - Kevin Marson

GFL Environmental - 550 - Rocky View County
 220 Carmek Blvd
 Rocky View County, AB
 CA T1X 1X1
 Contact: GFL Calgary
 calgarymaintenance@gflenv.com
 T:
 F: (403)369-6163

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.