



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1368
 Component
Rear Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0905420	WC0895806	WC0873861
Sample Date		Client Info		21 Feb 2024	11 Jan 2024	14 Nov 2023
Machine Age	hrs	Client Info		34428	34301	33778
Oil Age	hrs	Client Info		479	523	556
Filter Age	hrs	Client Info		479	523	556
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	19	11	14
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	1
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	1	1	2
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	1.2	0.4	0.5
Nitration	Abs/cm	ASTM D7624*	>20	11.8	8.9	9.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	25.9	23.6	26.9
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	2	2	5
Boron	ppm	ASTM D5185(m)	250	2	2	1
Barium	ppm	ASTM D5185(m)	10	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	100	58	56	57
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	450	929	912	906
Calcium	ppm	ASTM D5185(m)	3000	1082	1018	1011
Phosphorus	ppm	ASTM D5185(m)	1150	973	953	905
Zinc	ppm	ASTM D5185(m)	1350	1152	1121	1111
Sulfur	ppm	ASTM D5185(m)	4250	2629	2576	2385
Oxidation	Abs/.1mm	ASTM D7414*	>25	25.2	23.6	30.0
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	13.0	12.7	12.6

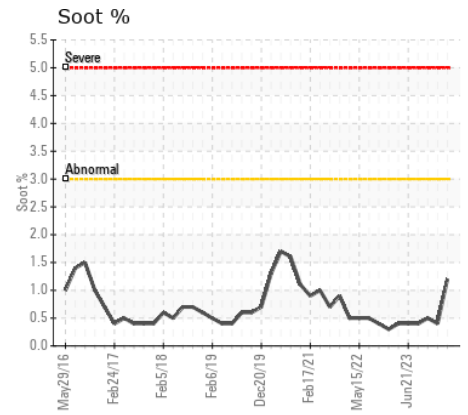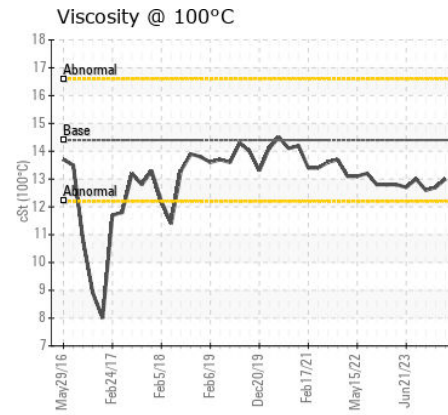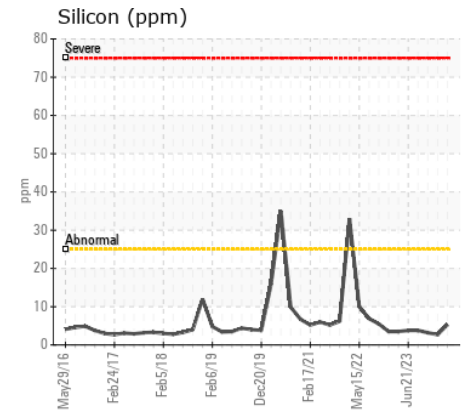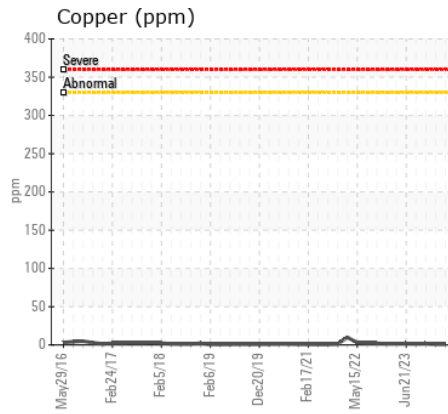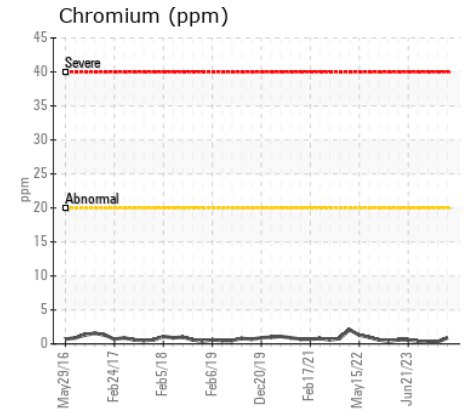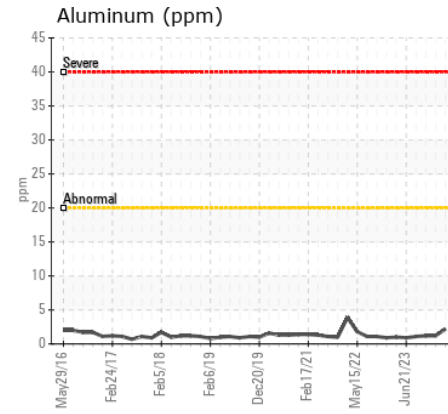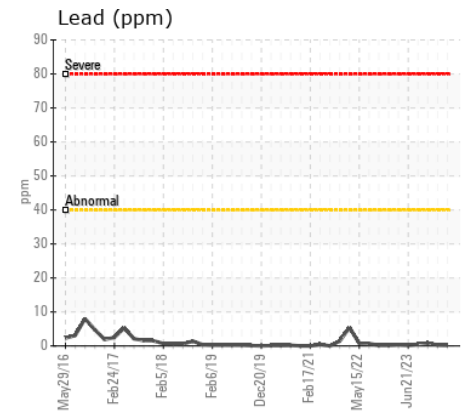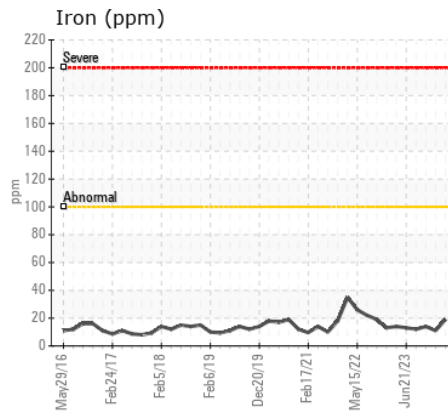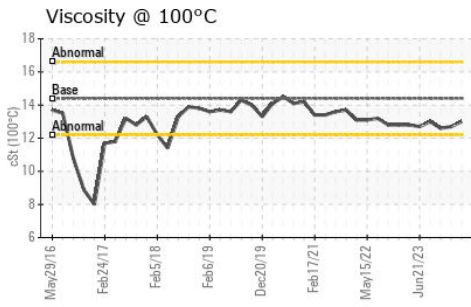

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0905420
Lab Number : 02618622
Unique Number : 5735732
Test Package : MOB 1
Received : 28 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Kevin Marson

KINGSTON TRANSIT
 1181 JOHN COUNTER BLVD
 KINGSTON, ON
 CA K7K 6C7
 Contact: Brent Gunter
 bgunter@cityofkingston.ca
 T: (613)546-4291
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.