



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id  
**SKIMMER HPU PC10**  
Component  
**Hydraulic System**  
Fluid  
**R&O OIL ISO 46 (--- GAL)**

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend that you drain the oil from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.

## CONTAMINATION


The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

## FLUID CONDITION


The AN level is above the recommended limit. Additive levels indicate the addition of a different brand, or type of oil. The oil is no longer serviceable.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP	---	---
Sample Date		Client Info		23 Feb 2024	---	---
Machine Age	yrs	Client Info		0	---	---
Oil Age	yrs	Client Info		1	---	---
Filter Age	yrs	Client Info		1	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185(m)	>20	2	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>20	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	---	---
Lead	ppm	ASTM D5185(m)	>20	<1	---	---
Copper	ppm	ASTM D5185(m)	>20	2	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>15	1	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1199	---	---
Particles >6µm		ASTM D7647	>1300	480	---	---
Particles >14µm		ASTM D7647	>160	49	---	---
Particles >21µm		ASTM D7647	>40	10	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	1	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/16/13	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---
Sodium	ppm	ASTM D5185(m)		1	---	---
Boron	ppm	ASTM D5185(m)	5	1	---	---
Barium	ppm	ASTM D5185(m)	5	0	---	---
Molybdenum	ppm	ASTM D5185(m)	5	0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	5	0	---	---
Calcium	ppm	ASTM D5185(m)	5	2	---	---
Phosphorus	ppm	ASTM D5185(m)	100	148	---	---
Zinc	ppm	ASTM D5185(m)	25	24	---	---
Sulfur	ppm	ASTM D5185(m)	1500	1196	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.08	2.76	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	46	49.9	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	10.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	97	198	---	---


**▲ Acid Number**

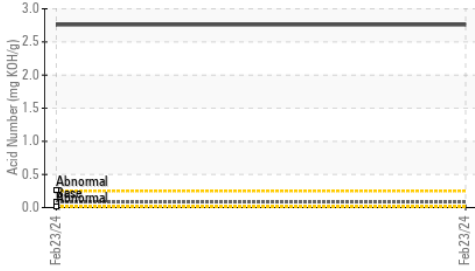


**● Additives**

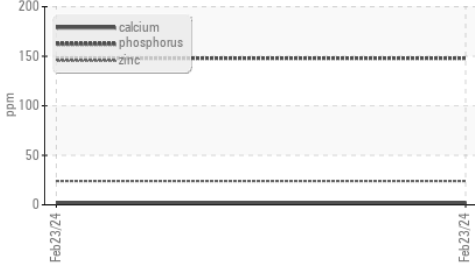


**Ferrous Alloys**

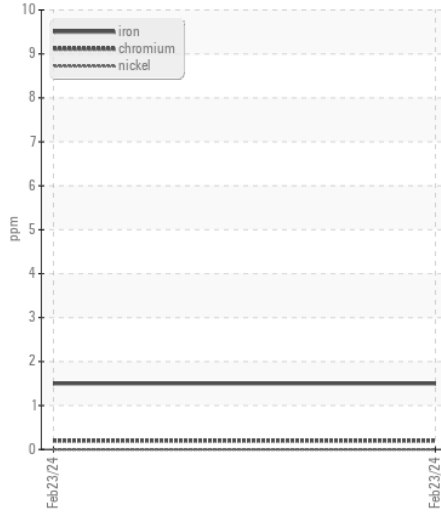


**Particle Count**

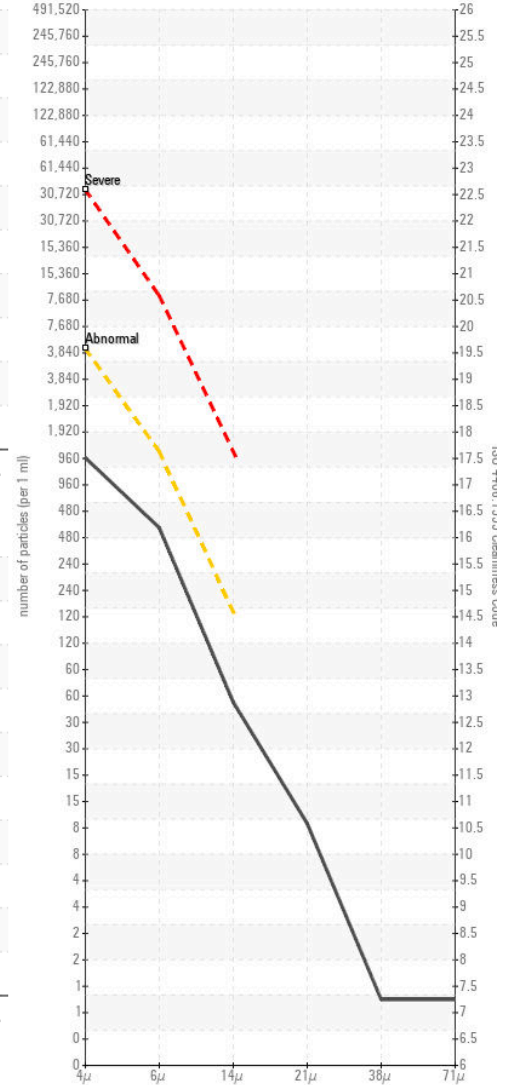


**Non-ferrous Metals**

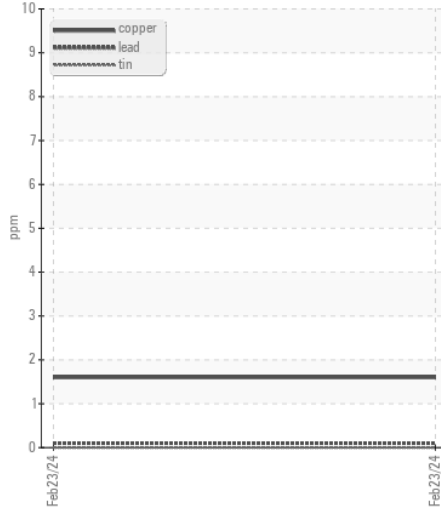


**Particle Count**

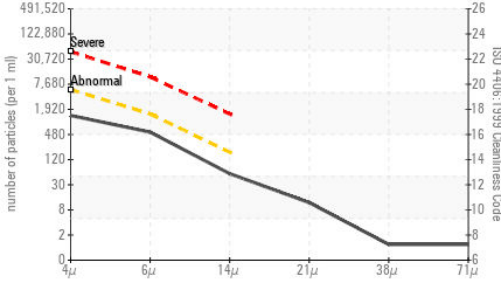

**Viscosity @ 100°C**

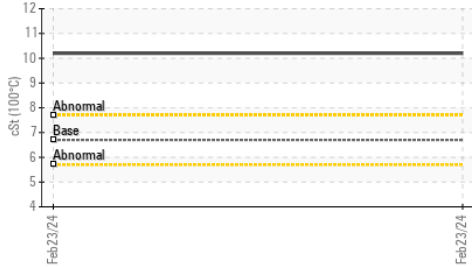


**Viscosity @ 40°C**

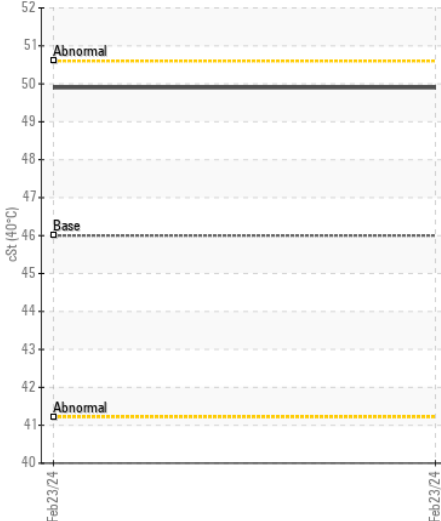

**Viscosity @ 40°C**



**▲ Acid Number**

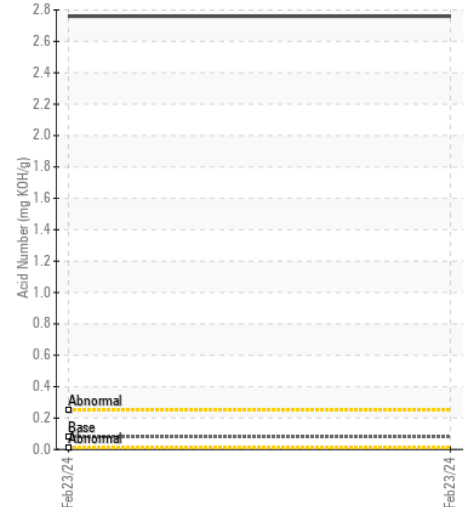

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP **Received** : 28 Feb 2024  
**Lab Number** : 02618668 **Tested** : 01 Mar 2024  
**Unique Number** : 5735778 **Diagnosed** : 01 Mar 2024 - Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KV100, TAN Man, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**CPI AUTOMATION**  
 5155, TIMBERLEA BLVD  
 MISSISSAUGA, ON  
 CA L4W 2S3  
 Contact: Lou Botelhu  
 loub@cpiautomation.com  
 T: (905)625-4805  
 F: (905)629-8409