



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Machine Id  
**413101**  
Component  
**Transmission (Auto)**  
Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number  |     | Client Info |           | <b>GFL0112425</b>  | ---      | ---      |
| Sample Date    |     | Client Info |           | <b>21 Feb 2024</b> | ---      | ---      |
| Machine Age    | hrs | Client Info |           | <b>2493</b>        | ---      | ---      |
| Oil Age        | hrs | Client Info |           | <b>2493</b>        | ---      | ---      |
| Filter Age     | hrs | Client Info |           | <b>2493</b>        | ---      | ---      |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | ---      | ---      |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | ---      | ---      |
| Sample Status  |     |             |           | <b>NORMAL</b>      | ---      | ---      |

**WEAR**

All component wear rates are normal.

|              |        |               |      |              |     |     |
|--------------|--------|---------------|------|--------------|-----|-----|
| PQ           |        | ASTM D8184*   | >50  | <b>0</b>     | --- | --- |
| Iron         | ppm    | ASTM D5185(m) | >160 | <b>68</b>    | --- | --- |
| Chromium     | ppm    | ASTM D5185(m) | >5   | <b>&lt;1</b> | --- | --- |
| Nickel       | ppm    | ASTM D5185(m) | >5   | <b>&lt;1</b> | --- | --- |
| Titanium     | ppm    | ASTM D5185(m) |      | <b>0</b>     | --- | --- |
| Silver       | ppm    | ASTM D5185(m) | >5   | <b>0</b>     | --- | --- |
| Aluminum     | ppm    | ASTM D5185(m) | >50  | <b>29</b>    | --- | --- |
| Lead         | ppm    | ASTM D5185(m) | >50  | <b>5</b>     | --- | --- |
| Copper       | ppm    | ASTM D5185(m) | >225 | <b>6</b>     | --- | --- |
| Tin          | ppm    | ASTM D5185(m) | >10  | <b>5</b>     | --- | --- |
| Vanadium     | ppm    | ASTM D5185(m) |      | <b>0</b>     | --- | --- |
| White Metal  | scalar | Visual*       | NONE | <b>NONE</b>  | --- | --- |
| Yellow Metal | scalar | Visual*       | NONE | <b>NONE</b>  | --- | --- |

**CONTAMINATION**












There is no indication of any contamination in the fluid.

|                  |        |               |       |              |     |     |
|------------------|--------|---------------|-------|--------------|-----|-----|
| Silicon          | ppm    | ASTM D5185(m) | >20   | <b>5</b>     | --- | --- |
| Potassium        | ppm    | ASTM D5185(m) | >20   | <b>3</b>     | --- | --- |
| Water            |        | WC Method     | >0.1  | <b>NEG</b>   | --- | --- |
| Silt             | scalar | Visual*       | NONE  | <b>NONE</b>  | --- | --- |
| Debris           | scalar | Visual*       | NONE  | <b>NONE</b>  | --- | --- |
| Sand/Dirt        | scalar | Visual*       | NONE  | <b>NONE</b>  | --- | --- |
| Appearance       | scalar | Visual*       | NORML | <b>NORML</b> | --- | --- |
| Odor             | scalar | Visual*       | NORML | <b>NORML</b> | --- | --- |
| Emulsified Water | scalar | Visual*       | >0.1  | <b>NEG</b>   | --- | --- |

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

|                  |          |               |      |              |     |     |
|------------------|----------|---------------|------|--------------|-----|-----|
| Sodium           | ppm      | ASTM D5185(m) |      | <b>6</b>     | --- | --- |
| Boron            | ppm      | ASTM D5185(m) | 78   | <b>76</b>    | --- | --- |
| Barium           | ppm      | ASTM D5185(m) |      | <b>1</b>     | --- | --- |
| Molybdenum       | ppm      | ASTM D5185(m) | 0    | <b>&lt;1</b> | --- | --- |
| Manganese        | ppm      | ASTM D5185(m) |      | <b>1</b>     | --- | --- |
| Magnesium        | ppm      | ASTM D5185(m) | 0    | <b>2</b>     | --- | --- |
| Calcium          | ppm      | ASTM D5185(m) | 113  | <b>71</b>    | --- | --- |
| Phosphorus       | ppm      | ASTM D5185(m) | 222  | <b>228</b>   | --- | --- |
| Zinc             | ppm      | ASTM D5185(m) |      | <b>8</b>     | --- | --- |
| Sulfur           | ppm      | ASTM D5185(m) | 1326 | <b>1069</b>  | --- | --- |
| Acid Number (AN) | mg KOH/g | ASTM D974*    | 1.4  | <b>1.06</b>  | --- | --- |
| Visc @ 40°C      | cSt      | ASTM D7279(m) | 34.8 | <b>34.6</b>  | --- | --- |

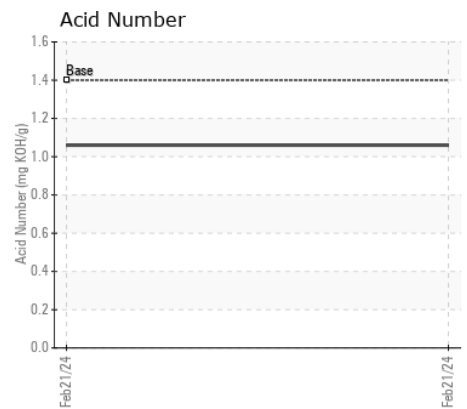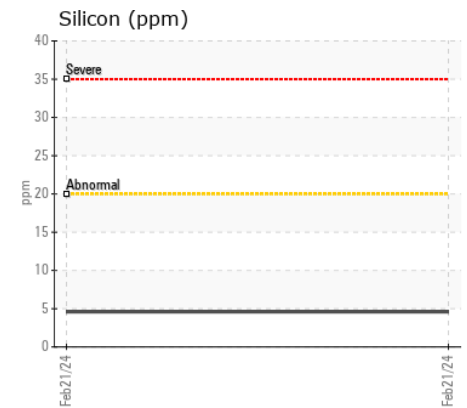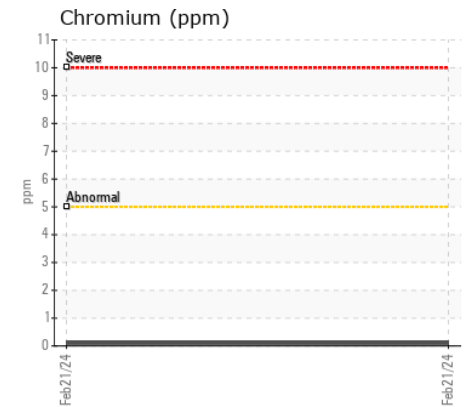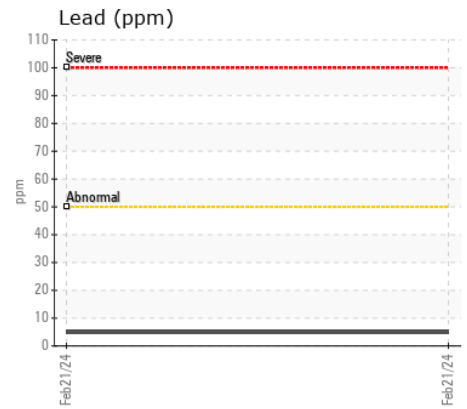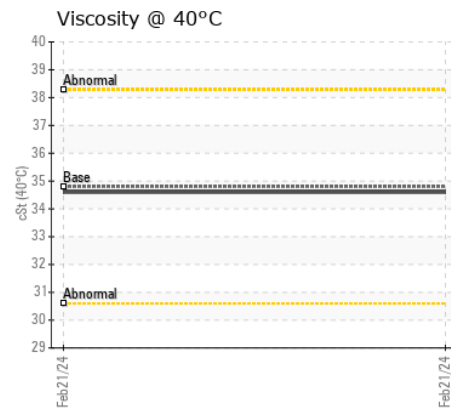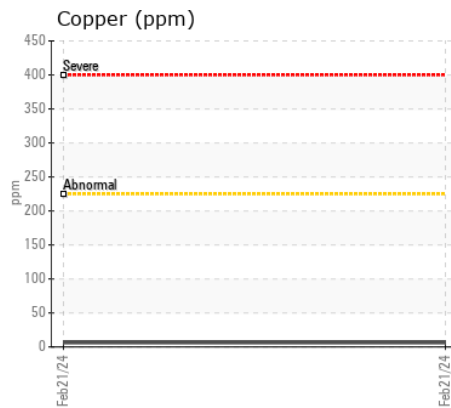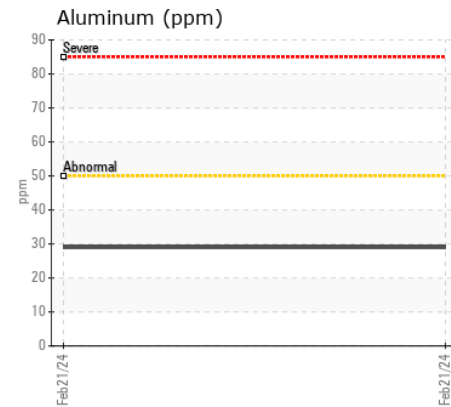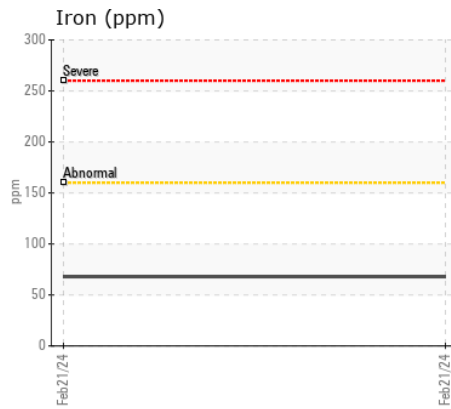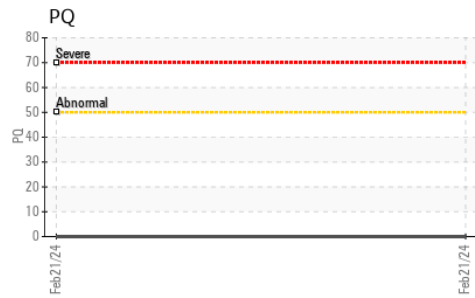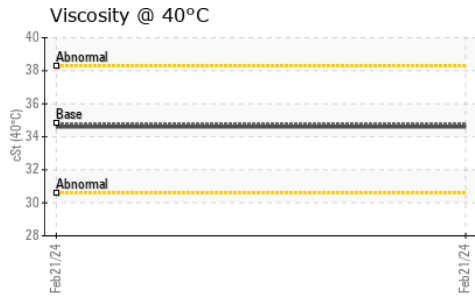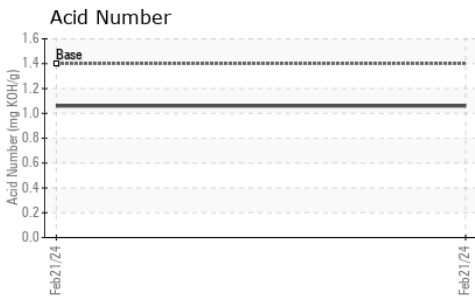

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0112425  
**Lab Number** : 02618735  
**Unique Number** : 5735845  
**Test Package** : MOB 2 ( Additional Tests: PQ, TAN Man )

**GFL Environmental - 550 - Rocky View County**  
 220 Carmek Blvd  
 Rocky View County, AB  
 CA T1X 1X1  
 Contact: GFL Calgary  
 calgarymaintenance@gflenv.com

*To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.*

T:  
 F: (403)369-6163