



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50M 144842-1216
Component
Rear Right Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0270197	LH0274455	LH0256971
Sample Date		Client Info		27 Feb 2024	23 Aug 2023	09 Mar 2023
Machine Age	hrs	Client Info		2406	1252	561
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>325	14	27	61
Chromium	ppm	ASTM D5185(m)	>3	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	1
Lead	ppm	ASTM D5185(m)	>4	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>75	5	11	12
Tin	ppm	ASTM D5185(m)	>3	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	▲ LIGHT
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	2	6	13
Potassium	ppm	ASTM D5185(m)	>20	<1	1	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>170	1	2	3
Boron	ppm	ASTM D5185(m)	400	277	218	9
Barium	ppm	ASTM D5185(m)	200	0	<1	1
Molybdenum	ppm	ASTM D5185(m)	12	0	<1	1
Manganese	ppm	ASTM D5185(m)		0	<1	2
Magnesium	ppm	ASTM D5185(m)	12	<1	2	1
Calcium	ppm	ASTM D5185(m)	150	24	58	204
Phosphorus	ppm	ASTM D5185(m)	1650	1142	1351	1624
Zinc	ppm	ASTM D5185(m)	125	15	26	50
Sulfur	ppm	ASTM D5185(m)	22500	19698	19763	20460
Visc @ 40°C	cSt	ASTM D7279(m)	143	104	113	149

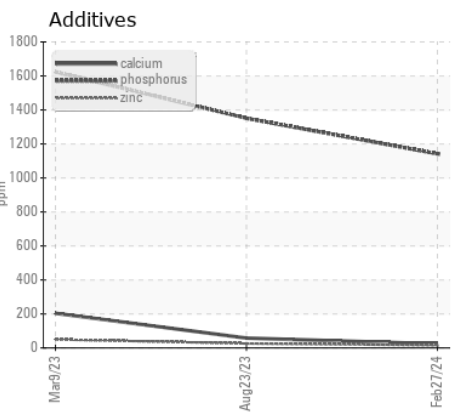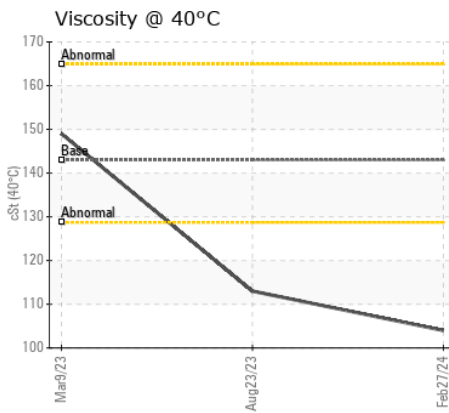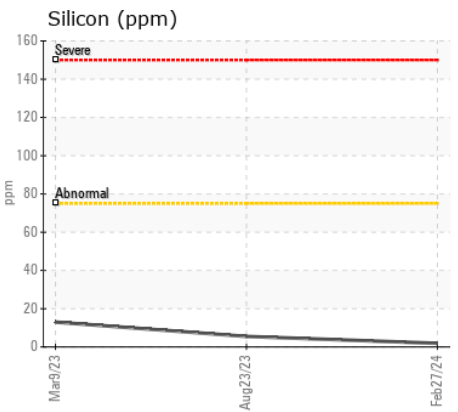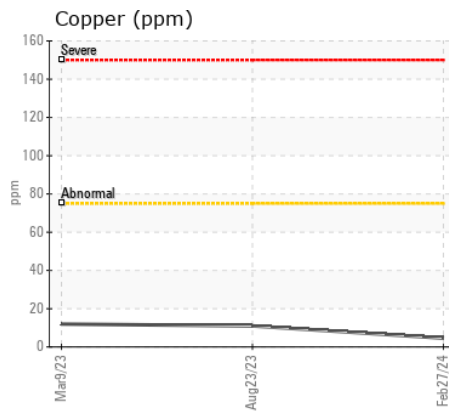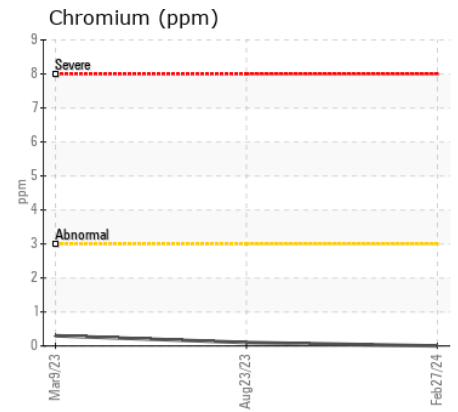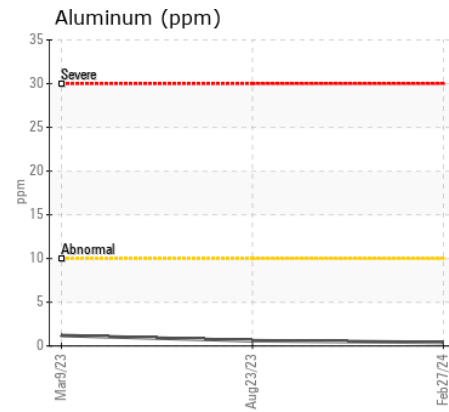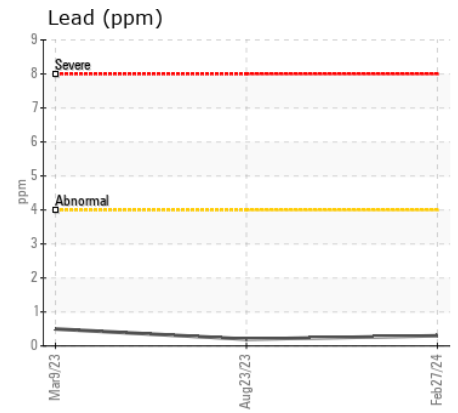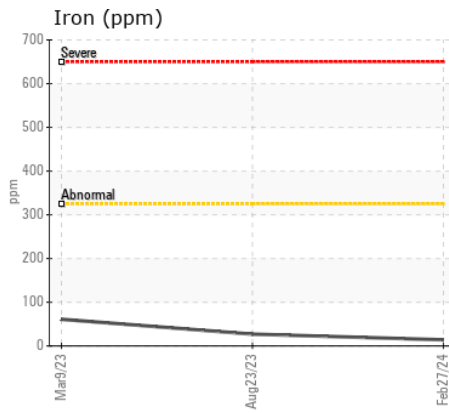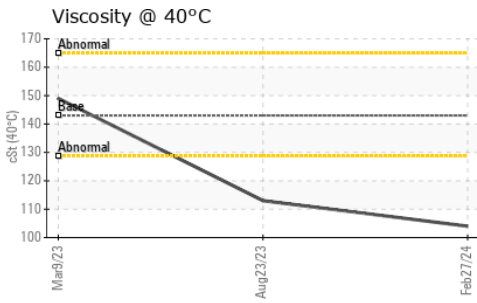

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0270197
Lab Number : 02618764
Unique Number : 5735874
Test Package : MOB 1
Received : 28 Feb 2024
Tested : 28 Feb 2024
Diagnosed : 28 Feb 2024 - Wes Davis

American Iron and Metal
 140 DOWTY ROAD
 AJAX, ON
 CA L1S 1P7
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: