



Machine Id
8979
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (40 LTR)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0113166	GFL0107869	GFL0093619
Sample Date		Client Info		23 Feb 2024	09 Jan 2024	14 Sep 2023
Machine Age	kms	Client Info		169574	163734	162752
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				SEVERE	SEVERE	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	48	37	6
Chromium	ppm	ASTM D5185(m)	>20	3	2	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	3	3	<1
Lead	ppm	ASTM D5185(m)	>40	<1	<1	0
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	3	2
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Fuel	%	ASTM D7593*	>3.0	▲ 27.7	▲ 19.6	▲ 5.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	3.3	2.6	0.7
Nitration	Abs/cm	ASTM D7624*	>20	14.4	13.4	6.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	27.0	26.3	18.8
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185(m)		2	5	2
Boron	ppm	ASTM D5185(m)	0	2	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	38	43	54
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1010	615	681	895
Calcium	ppm	ASTM D5185(m)	1070	664	750	966
Phosphorus	ppm	ASTM D5185(m)	1150	653	718	1013
Zinc	ppm	ASTM D5185(m)	1270	743	831	1093
Sulfur	ppm	ASTM D5185(m)	2060	1658	1813	2438
Oxidation	Abs/.1mm	ASTM D7414*	>25	24.8	25.2	13.1
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	▲ 8.4	▲ 9	13.1

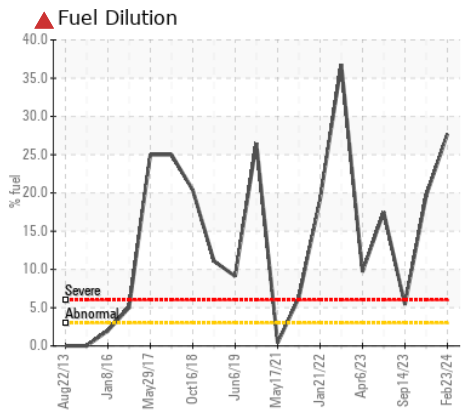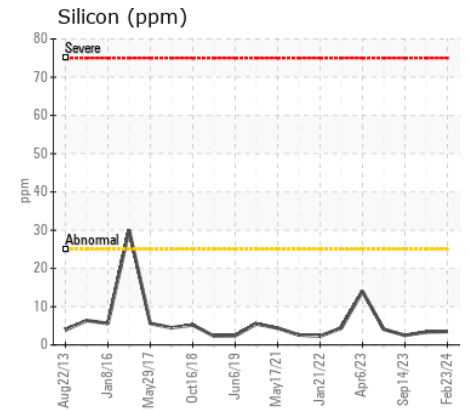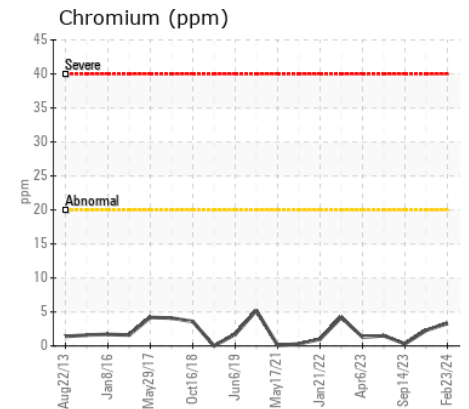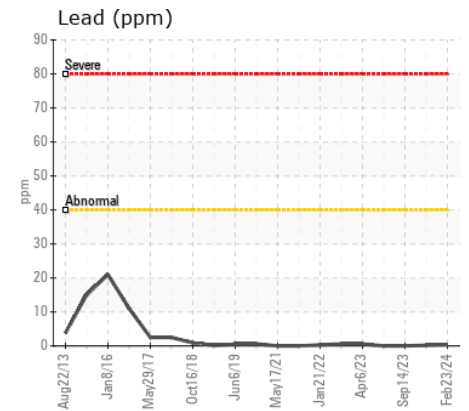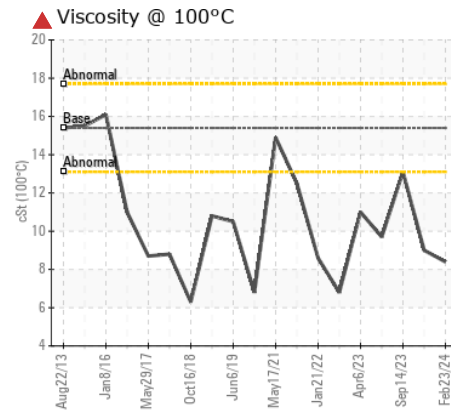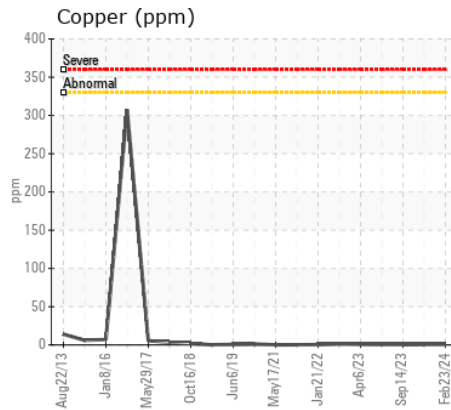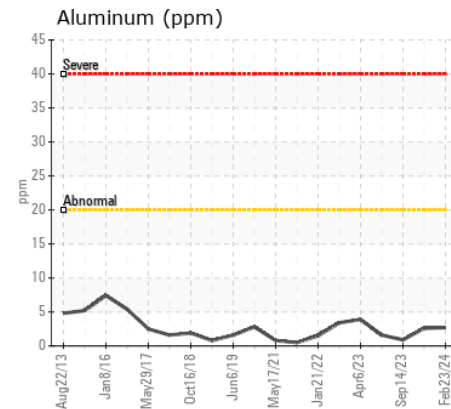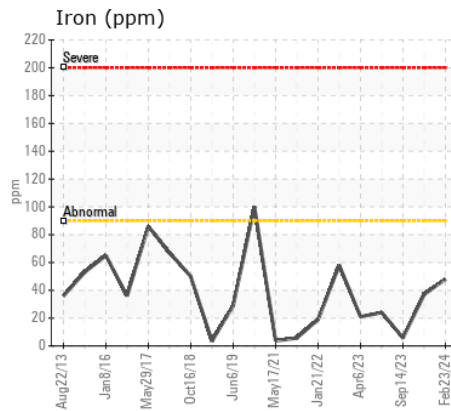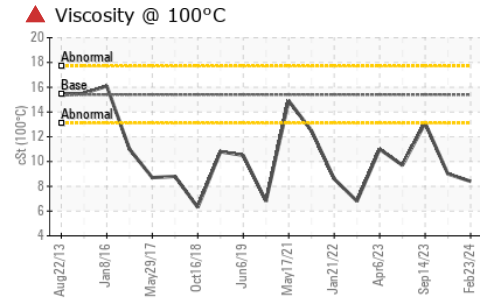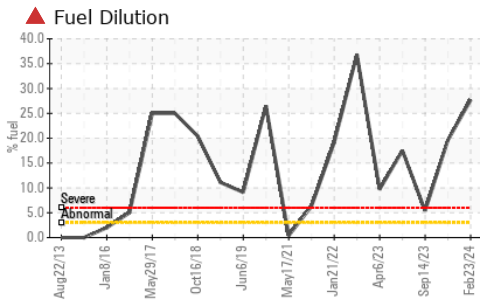

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0113166
Lab Number : 02618847
Unique Number : 5735957
Test Package : MOB 1 (Additional Tests: PercentFuel)

GFL Environmental - 225 - COT(D2)
 20 Brydon Drive
 Etobicoke, ON
 CA M9W 5R6
 Contact: Rick Philip
 rphilip@gflenv.com
 T: (416)745-8080
 F:

*To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.*