



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
MICHAUDVILLE

Machine Id
1208

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084409	PC0082563	PC0072111
Sample Date		Client Info		28 Feb 2024	24 Oct 2023	04 Jun 2023
Machine Age	hrs	Client Info		13650	13147	12696
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	10	16	11
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	4	5	4
Lead	ppm	ASTM D5185(m)	>40	<1	<1	0
Copper	ppm	ASTM D5185(m)	>330	1	2	1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	7	9	9
Potassium	ppm	ASTM D5185(m)	>20	3	4	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.2	0.2
Nitration	Abs/cm	ASTM D7624*	>20	7.3	7.4	7.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.7	19.7	20.4
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	2	<1	2	6
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	56	57	56
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	913	919	892
Calcium	ppm	ASTM D5185(m)	1050	1176	1167	1341
Phosphorus	ppm	ASTM D5185(m)	995	1024	1026	1097
Zinc	ppm	ASTM D5185(m)	1180	1174	1218	1212
Sulfur	ppm	ASTM D5185(m)	2600	2777	2668	2793
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.7	15.6	15.9
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	90.6	91.3	84.2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	13.7	13.8	12.9
Viscosity Index (VI)	Scale	ASTM D2270*	144	153	154	152

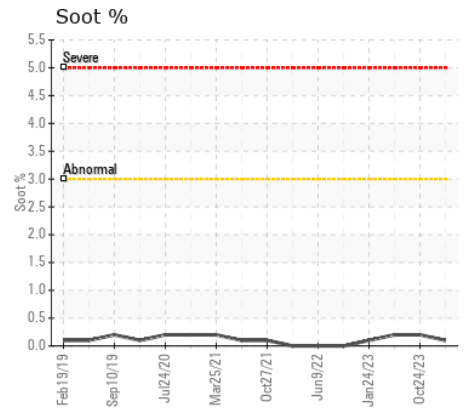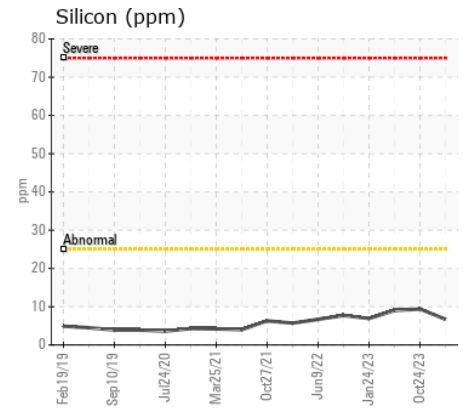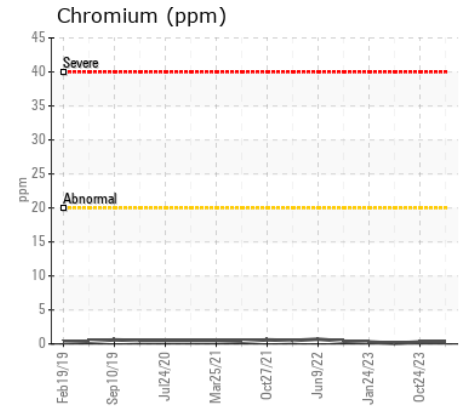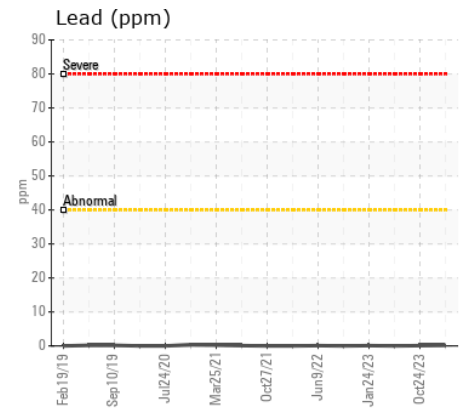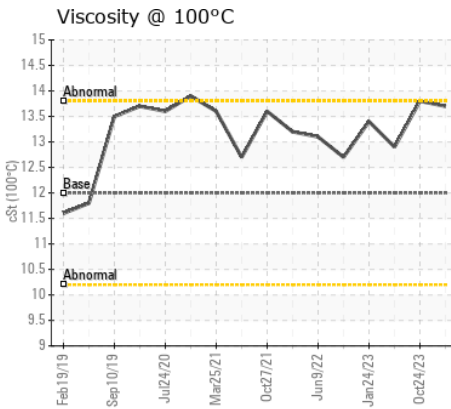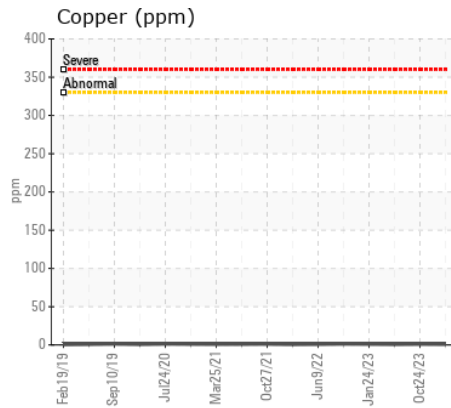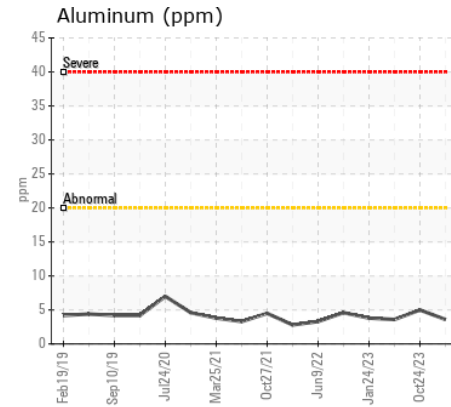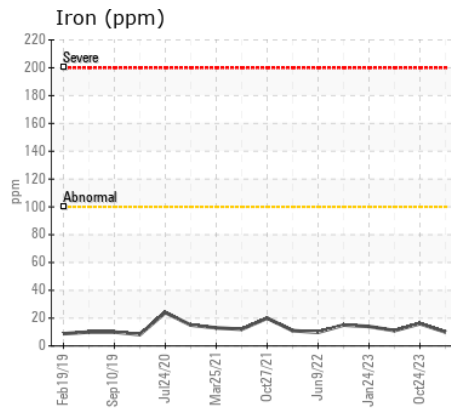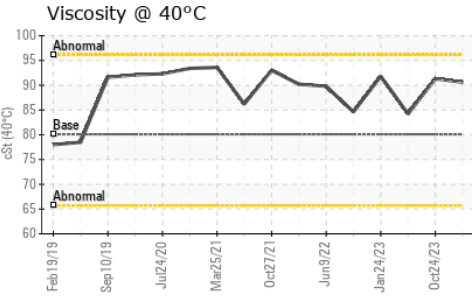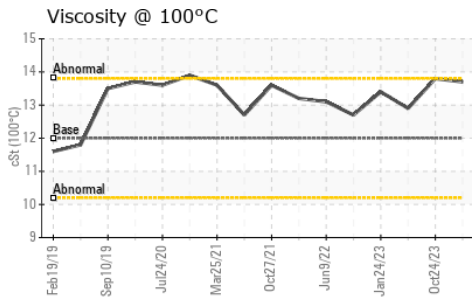

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084409
Lab Number : 02618880
Unique Number : 5735990
Test Package : MOB 1 (Additional Tests: KV40, VI)

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: