

Area
MICHAUDVILLE
Machine Id
1598
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084412	PC0072204	PC0072340
Sample Date		Client Info		28 Feb 2024	06 Jul 2023	10 May 2023
Machine Age	hrs	Client Info		26188	25561	25293
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	13	5	8
Chromium	ppm	ASTM D5185(m)	>20	1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	1	2
Lead	ppm	ASTM D5185(m)	>40	2	<1	1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	16	6	6
Potassium	ppm	ASTM D5185(m)	>20	1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	8.9	6.7	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.5	20.6	20.1
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	3	4
Boron	ppm	ASTM D5185(m)	2	1	1	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	58	55	60
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	936	909	979
Calcium	ppm	ASTM D5185(m)	1050	1138	1180	1152
Phosphorus	ppm	ASTM D5185(m)	995	1024	1100	1109
Zinc	ppm	ASTM D5185(m)	1180	1191	1188	1216
Sulfur	ppm	ASTM D5185(m)	2600	2707	2673	2760
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.4	15.8	15.7
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	81.8	86.2	85.7
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	12.6	13.1	12.8
Viscosity Index (VI)	Scale	ASTM D2270*	144	152	152	147

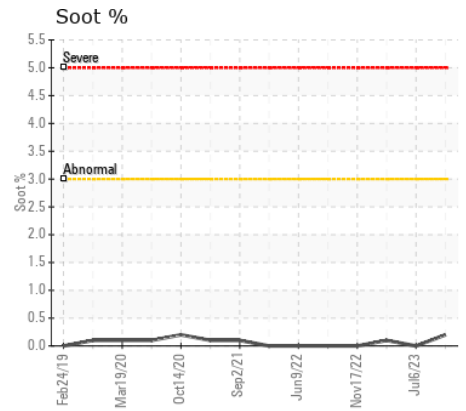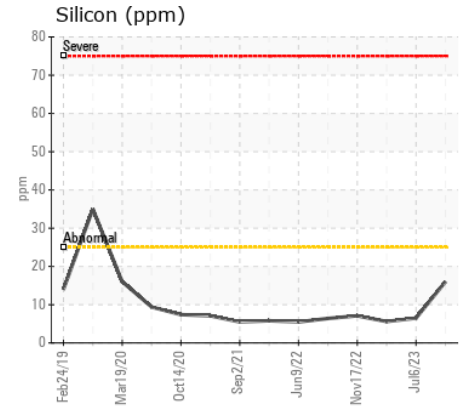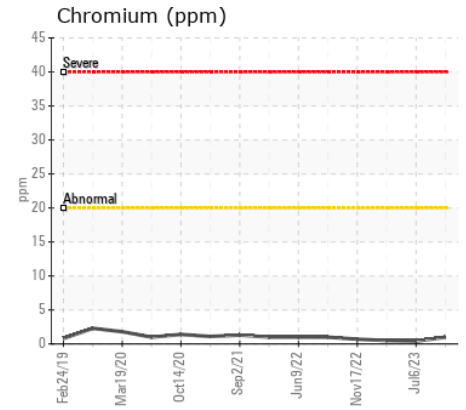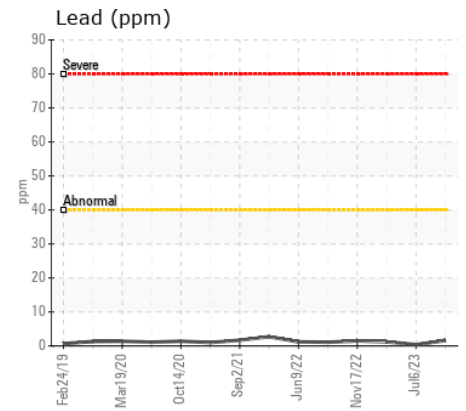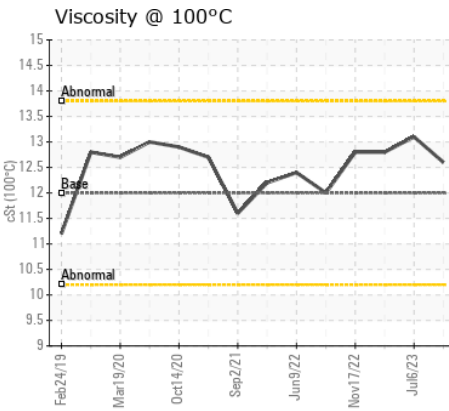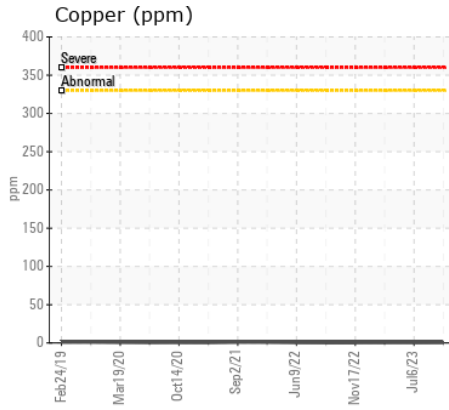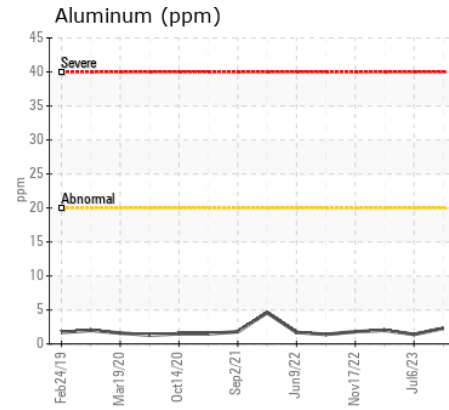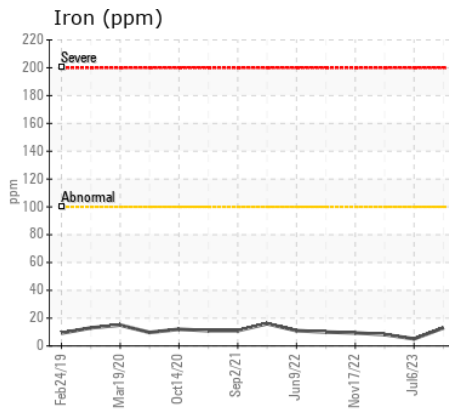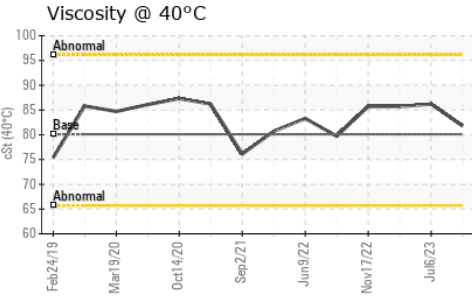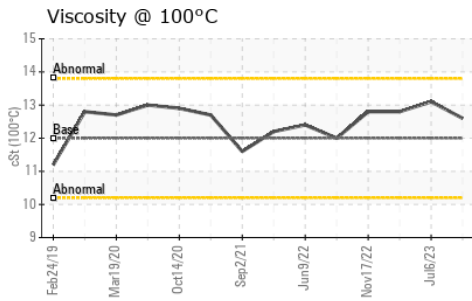

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084412
Lab Number : 02618882
Unique Number : 5735992
Test Package : MOB 1 (Additional Tests: KV40, VI)

LES ENTREPRISES MICHAUDVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: