

Area
MICHAUDVILLE
Machine Id
1507
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084411	PC0078349	PC0075812
Sample Date		Client Info		28 Feb 2024	30 Aug 2023	07 Jun 2023
Machine Age	hrs	Client Info		9818	9332	8919
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	12	11	11
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>4	<1	0	0
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	4	2	3
Lead	ppm	ASTM D5185(m)	>40	<1	0	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	9	8	7
Potassium	ppm	ASTM D5185(m)	>20	5	2	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.1	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	7.5	6.9	7.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.7	21.2	18.4
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	4	1
Boron	ppm	ASTM D5185(m)	2	<1	1	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	59	57	60
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	957	940	986
Calcium	ppm	ASTM D5185(m)	1050	1077	1151	1146
Phosphorus	ppm	ASTM D5185(m)	995	1019	1084	1106
Zinc	ppm	ASTM D5185(m)	1180	1161	1199	1212
Sulfur	ppm	ASTM D5185(m)	2600	2691	2686	2711
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.9	15.2	14.4
Visc @ 40°C	cSt	ASTM D7279(m)	80.1	93.6	94.1	96.1
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	13.9	14.0	14.1
Viscosity Index (VI)	Scale	ASTM D2270*	144	151	152	150

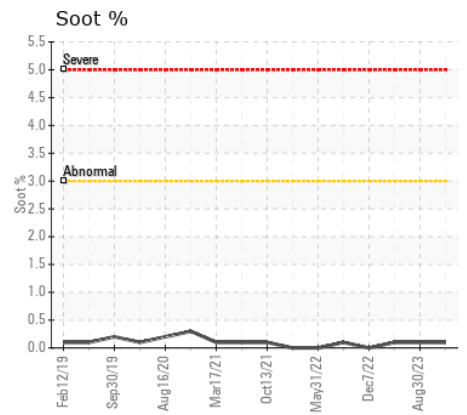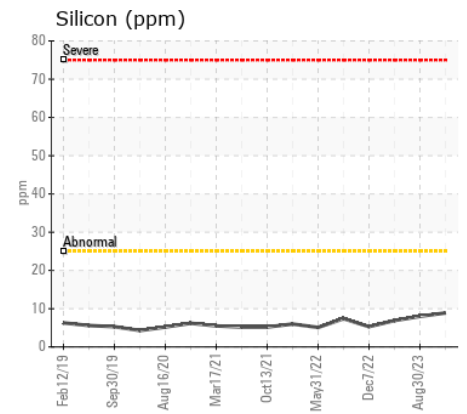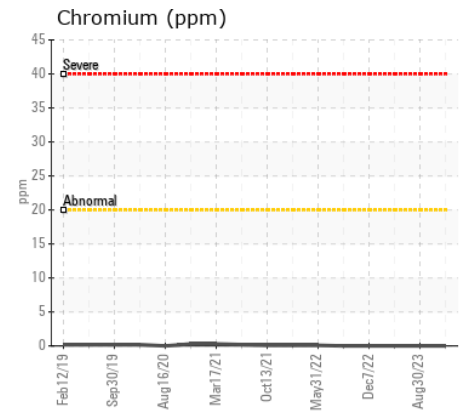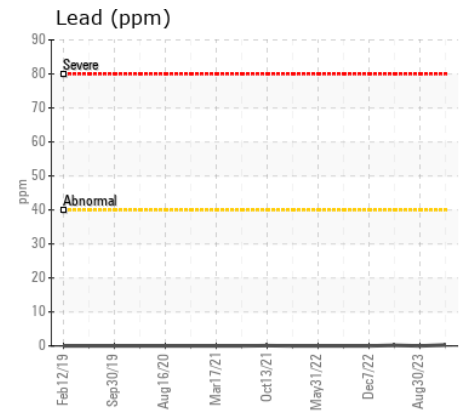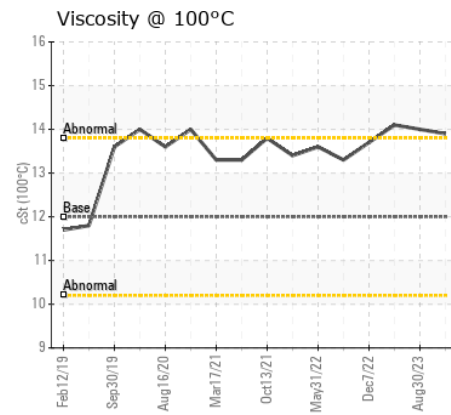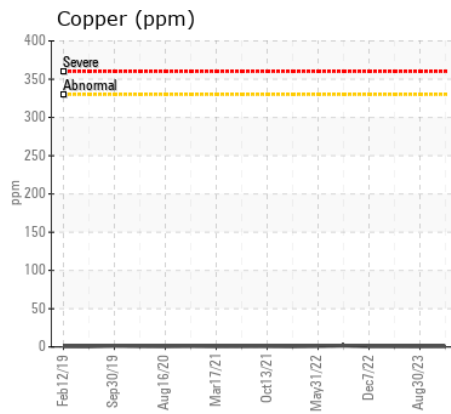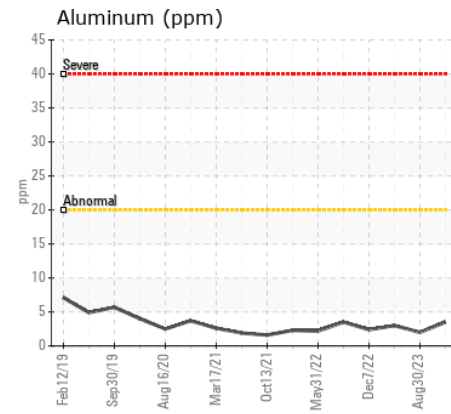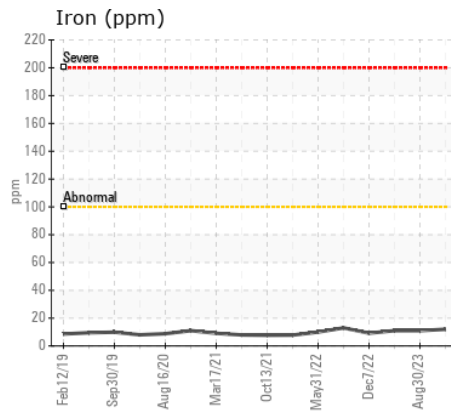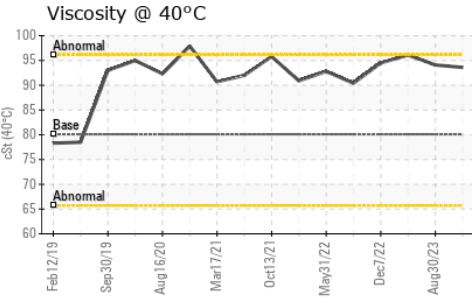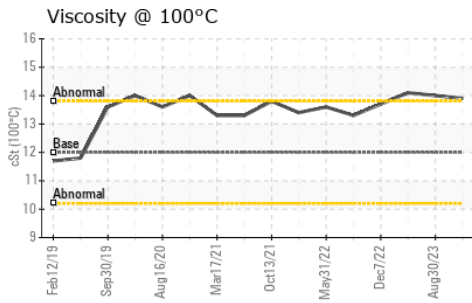

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084411
Lab Number : 02618897
Unique Number : 5736007
Test Package : MOB 1 (Additional Tests: KV40, VI)

LES ENTREPRISES MICHAUVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: