



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
CR23144
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 68 (600 LTR)

RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

WEAR

All component wear rates are normal.









CONTAMINATION

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0844557	WC0460370	WC0460357
Sample Date		Client Info		19 Feb 2024	02 Dec 2020	02 Aug 2020
Machine Age		Client Info		0	0	0
Oil Age		Client Info		0	0	0
Filter Age		Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		Not Changed	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185(m)	>20	2	2	2
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1	0
Lead	ppm	ASTM D5185(m)	>20	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>20	4	8	8
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>15	2	<1	0
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	▲ 32907	▲ 25373	▲ 15895
Particles >6µm		ASTM D7647	>1300	▲ 4232	● 1871	779
Particles >14µm		ASTM D7647	>160	▲ 329	46	14
Particles >21µm		ASTM D7647	>40	▲ 103	10	2
Particles >38µm		ASTM D7647	>10	13	0	0
Particles >71µm		ASTM D7647	>3	2	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 22/19/16	▲ 22/18/13	▲ 21/17/11
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<1	2	<1
Boron	ppm	ASTM D5185(m)	0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0	0
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	<1
Calcium	ppm	ASTM D5185(m)	50	53	53	53
Phosphorus	ppm	ASTM D5185(m)	330	335	305	334
Zinc	ppm	ASTM D5185(m)	430	416	414	411
Sulfur	ppm	ASTM D5185(m)	760	990	741	747
Acid Number (AN)	mg KOH/g	ASTM D974*	0.60	0.41	0.39	0.42
Visc @ 40°C	cSt	ASTM D7279(m)	67.4	65.5	66.2	66.2

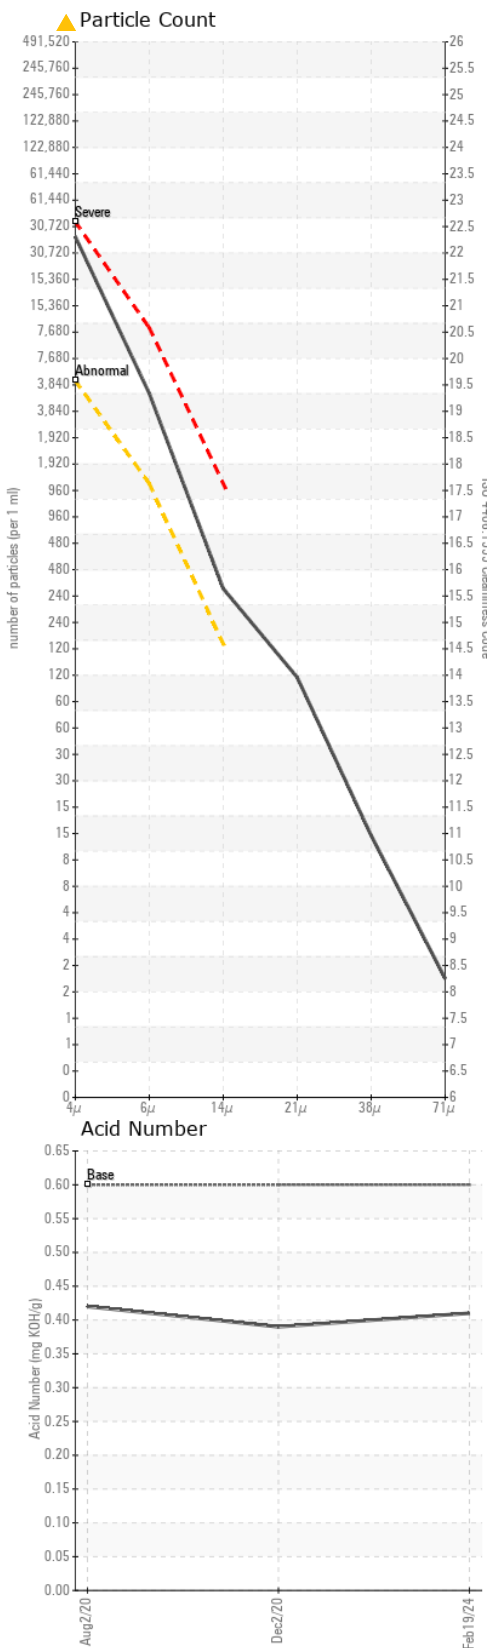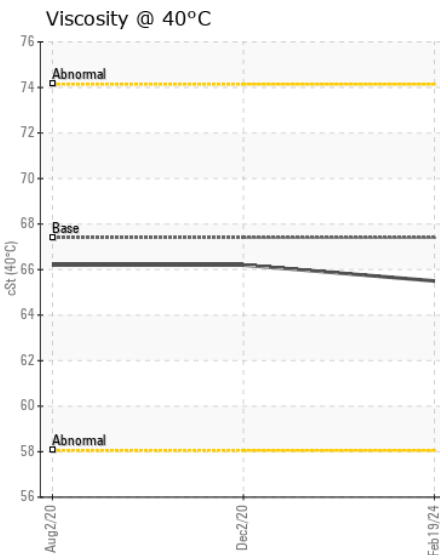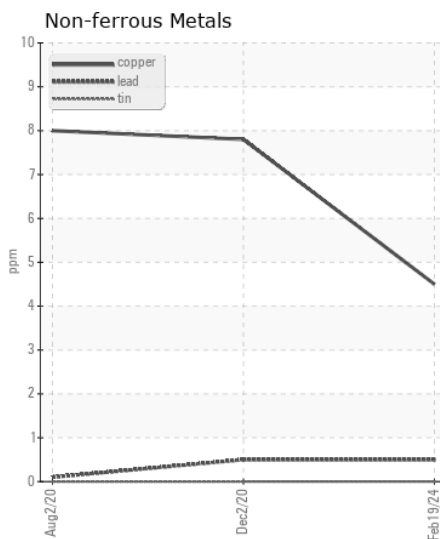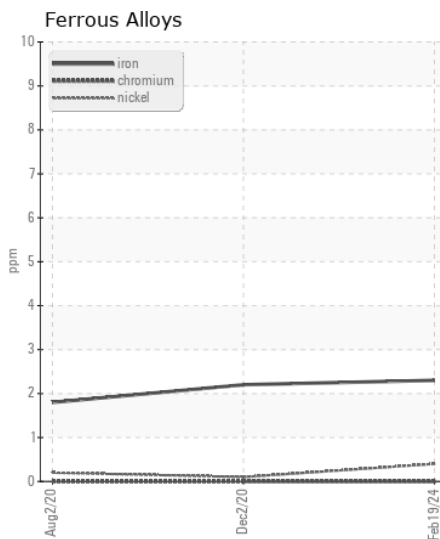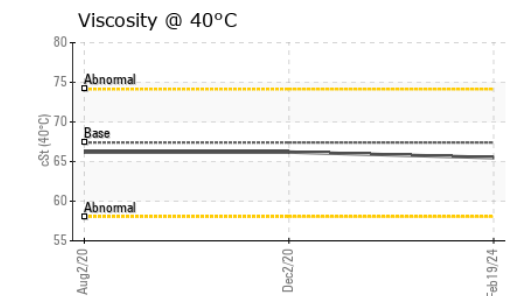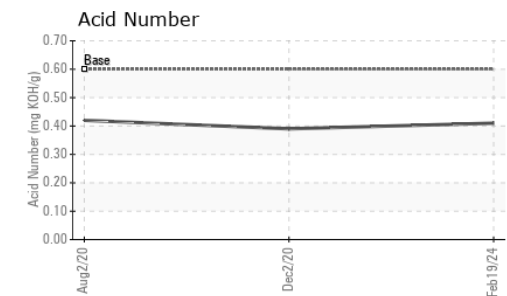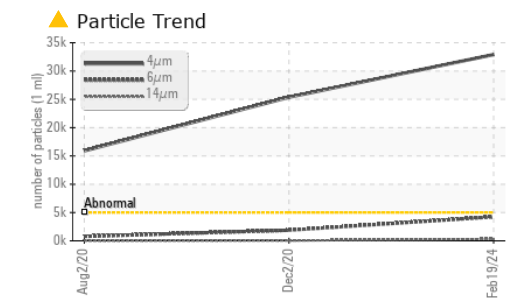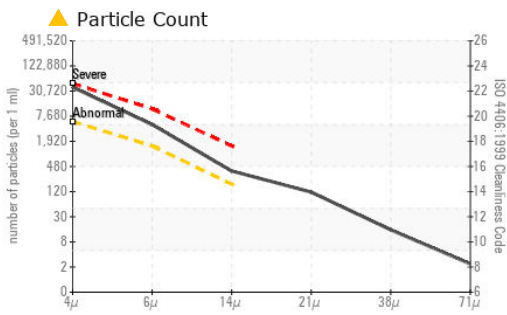

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0844557
Lab Number : 02618961
Unique Number : 5736071
Test Package : MAR 2
Received : 29 Feb 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Wes Davis

CANADIAN COAST GUARD
 CCGS CAPE ROGER, PO BOX 5667
 ST. JOHN'S, NL
 CA A1C 5X1
 Contact: Chief Engineer
 caperogerce@ccrg.ccgcs-ngcc.gc.ca
 T: (709)685-6843
 F: (709)685-6059

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.