



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
85101
Component
Unknown Component
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. Please provide more complete information on your next sample. Please specify the component make and model with your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

Component wear rates appear to be normal (unconfirmed).











CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

Viscosity of sample indicates oil is within SAE 10W30 range, advise investigate. The condition of the sample is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0084352	---	---
Sample Date		Client Info		28 Feb 2024	---	---
Machine Age	hrs	Client Info		7636	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)		13	---	---
Chromium	ppm	ASTM D5185(m)		2	---	---
Nickel	ppm	ASTM D5185(m)		<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		3	---	---
Lead	ppm	ASTM D5185(m)		<1	---	---
Copper	ppm	ASTM D5185(m)		3	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)		8	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method		NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*		NEG	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		7	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		47	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		721	---	---
Calcium	ppm	ASTM D5185(m)		1209	---	---
Phosphorus	ppm	ASTM D5185(m)		987	---	---
Zinc	ppm	ASTM D5185(m)		1100	---	---
Sulfur	ppm	ASTM D5185(m)		3059	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		65.0	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		10.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		143	---	---

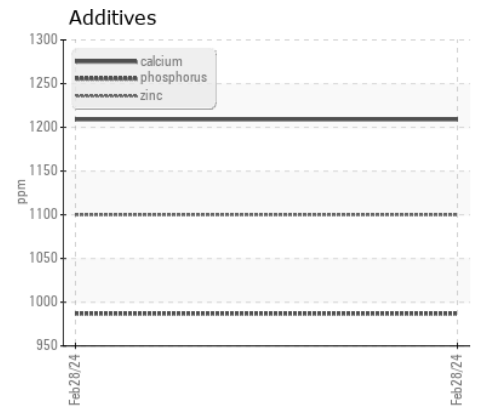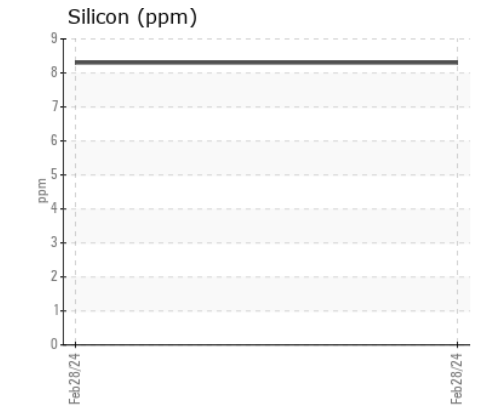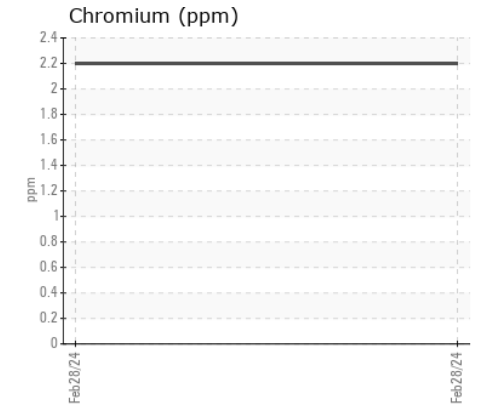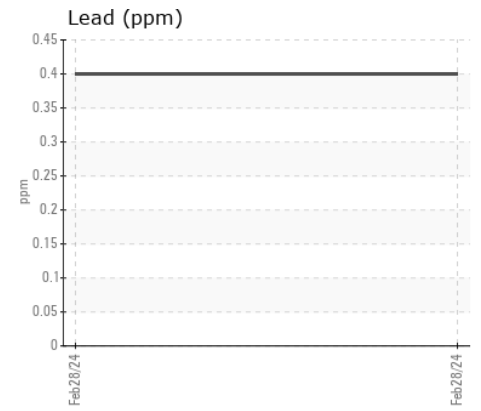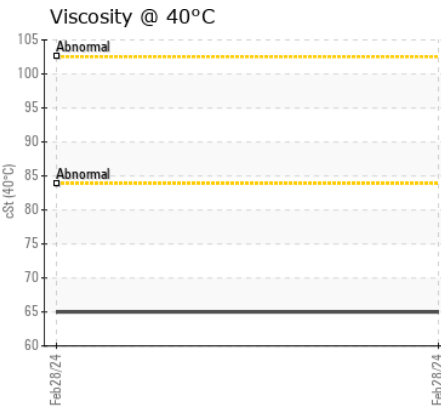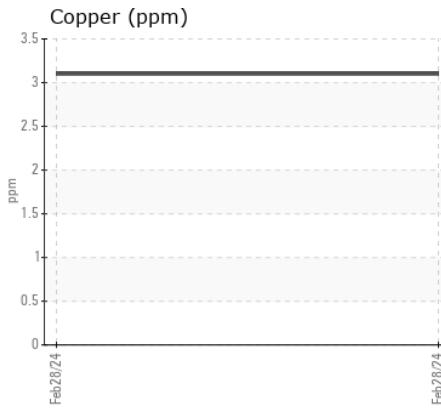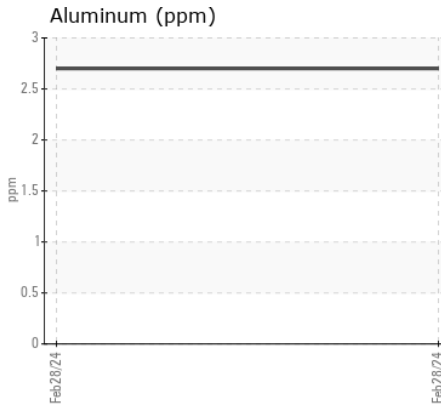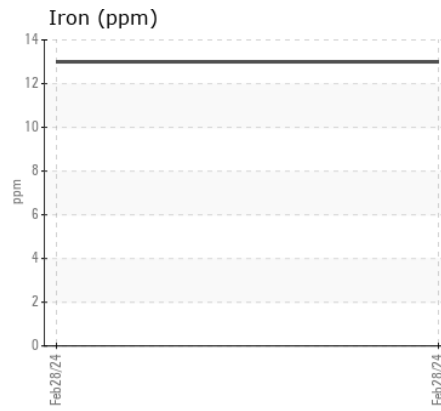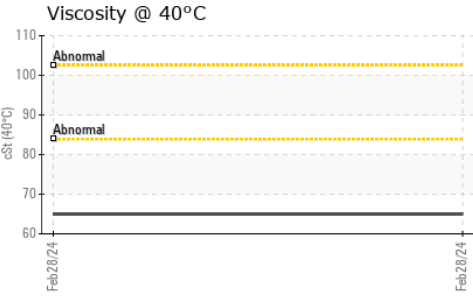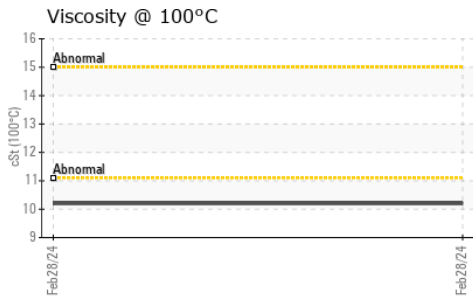

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0084352
Lab Number : 02619033
Unique Number : 5736143
Test Package : MOB 1 (Additional Tests: KV100, VI)

LES ENTREPRISES MICHAUDVILLE INC.
 270 RUE BRUNET
 MONT ST-HILAIRE, QC
 CA J3H 0M6
 Contact: Martin Trudel
 mtrudel@michaudville.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: