



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BUCYRUS 2570 DRAG #1
Component
1 Gearbox
Fluid
BELRAY 100 EP GEAR OIL 680 (82 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 2 test kits, this testkit includes AN to determine the suitability of the oil for continued use. this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.

CONTAMINATION


There is no indication of any contamination in the oil.

FLUID CONDITION


The condition of the oil is acceptable for the time in service (unconfirmed).

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		BR0000818	BR0000777	BR0000621
Sample Date		Client Info		31 Jan 2024	12 Sep 2023	25 Apr 2023
Machine Age	hrs	Client Info		275332	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
<hr/>						
Iron	ppm	ASTM D5185(m)	>200	54	20	16
Chromium	ppm	ASTM D5185(m)	>15	<1	0	0
Nickel	ppm	ASTM D5185(m)	>15	3	<1	<1
Titanium	ppm	ASTM D5185(m)		<1	0	<1
Silver	ppm	ASTM D5185(m)		0	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	89	53	89
Lead	ppm	ASTM D5185(m)	>100	<1	1	1
Copper	ppm	ASTM D5185(m)	>200	8	9	12
Tin	ppm	ASTM D5185(m)	>25	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
<hr/>						
Silicon	ppm	ASTM D5185(m)	>50	19	16	18
Potassium	ppm	ASTM D5185(m)	>20	1	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185(m)		6	4	3
Boron	ppm	ASTM D5185(m)		0	<1	<1
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		148	103	95
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)		1	1	<1
Calcium	ppm	ASTM D5185(m)		36	18	17
Phosphorus	ppm	ASTM D5185(m)		810	784	752
Zinc	ppm	ASTM D5185(m)		27	22	20
Sulfur	ppm	ASTM D5185(m)		8350	8683	9774
Visc @ 40°C	cSt	ASTM D7279(m)	688	610	617	603


Viscosity @ 40°C

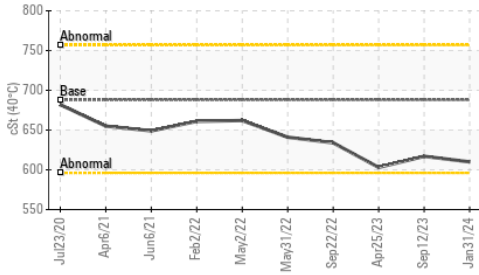


Aluminum (ppm)

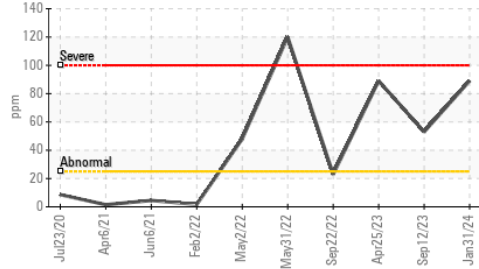


Ferrous Alloys

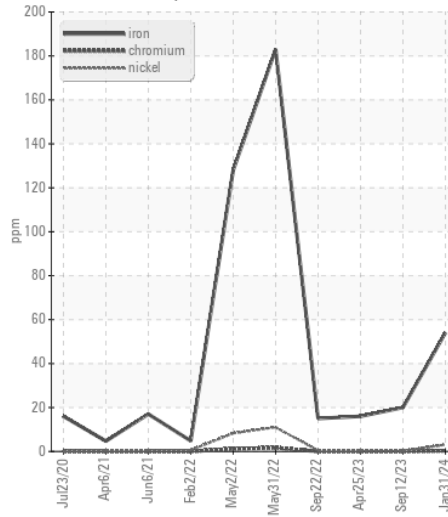

Non-ferrous Metals

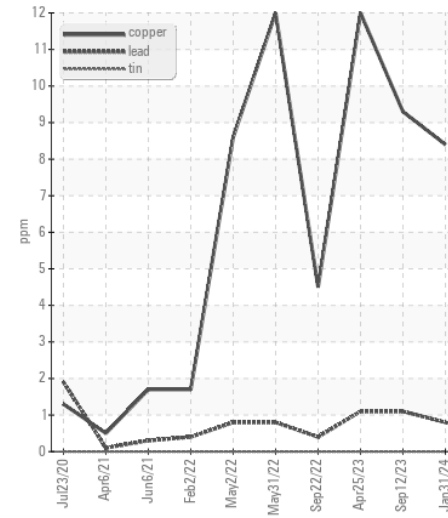

Viscosity @ 40°C

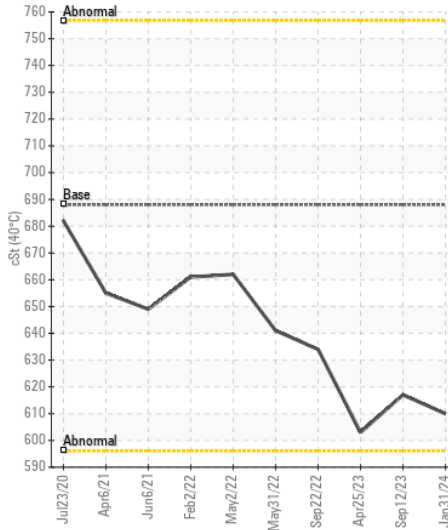

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : BR0000818
Lab Number : 02619075
Unique Number : 5736185
Test Package : IND 1
Received : 29 Feb 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Kevin Marson

CAN JER INDUSTRIAL LUBRICANT LTD
 419 MISSISSIPPIAN DRIVE
 ESTEVAN, SK
 CA S4A 2A4
 Contact: LONDON LILLEJORD
 llilljrd@canjer.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: