



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
919001
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0105925	GFL0059393	GFL0059381
Sample Date		Client Info		29 Feb 2024	04 Apr 2023	21 Feb 2023
Machine Age	hrs	Client Info		0	7172	0
Oil Age	hrs	Client Info		0	200	600
Filter Age	hrs	Client Info		0	200	600
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	16	2	4
Chromium	ppm	ASTM D5185(m)	>20	<1	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	1	2
Lead	ppm	ASTM D5185(m)	>40	2	0	<1
Copper	ppm	ASTM D5185(m)	>330	1	<1	1
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	5	2	2
Potassium	ppm	ASTM D5185(m)	>20	<1	0	0
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.2	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.4	5.1	6.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.8	17.9	20.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	1	1
Boron	ppm	ASTM D5185(m)	2	6	1	1
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	63	59	58
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	1018	952	970
Calcium	ppm	ASTM D5185(m)	1050	1119	1074	1094
Phosphorus	ppm	ASTM D5185(m)	995	1090	1075	1121
Zinc	ppm	ASTM D5185(m)	1180	1252	1162	1197
Sulfur	ppm	ASTM D5185(m)	2600	2788	2660	2644
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.3	13.6	14.8
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.5	11.4	11.3

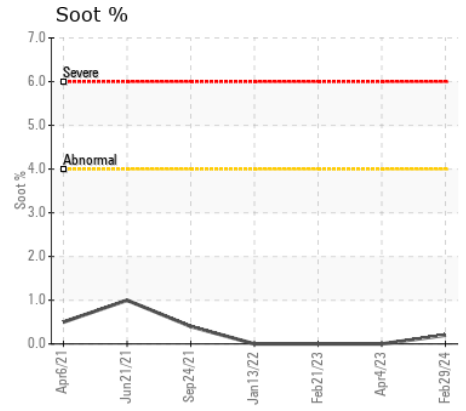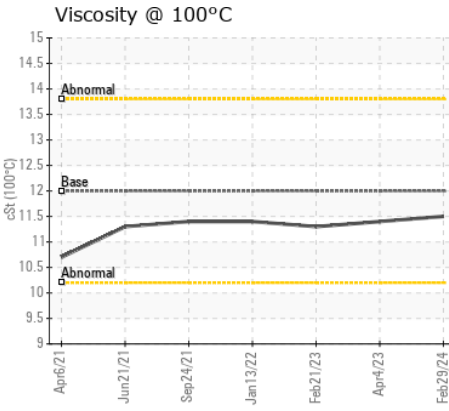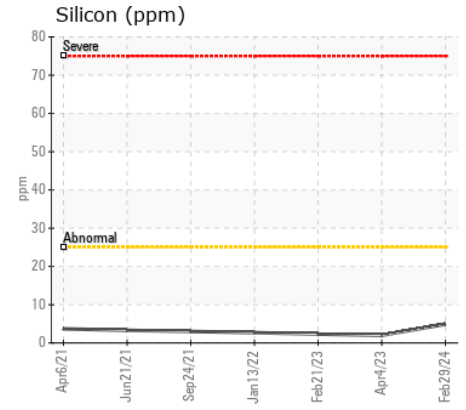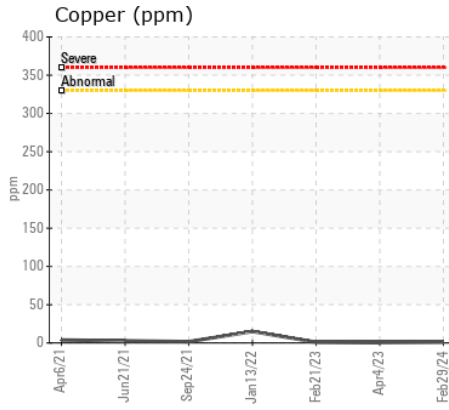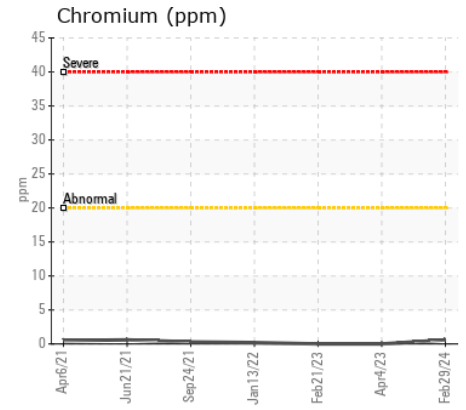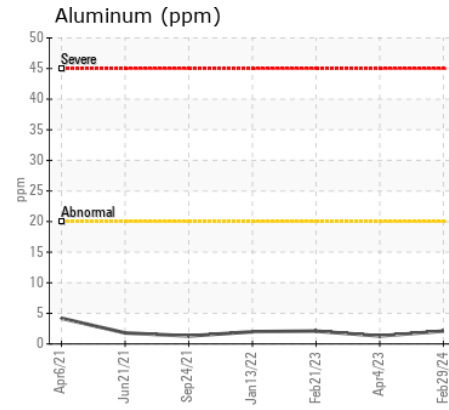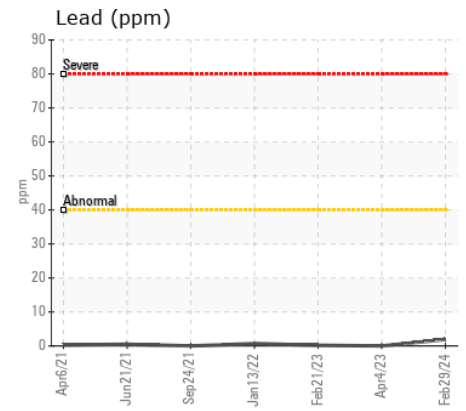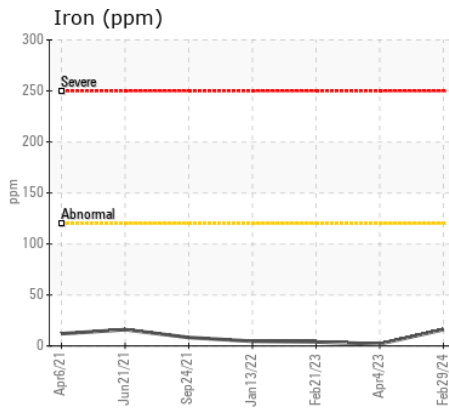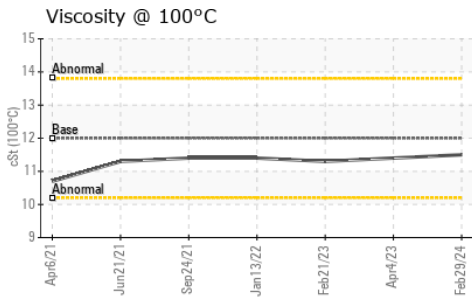

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0105925
Lab Number : 02619135
Unique Number : 5736245
Test Package : MOB 1
Received : 01 Mar 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Wes Davis

GFL Environmental - 555 - Slave Lake
 240 Balsam Rd NE, P.O. 362
 Slave Lake, AB
 CA T0G 2A0
 Contact: William Barker
 wbarker@gflenv.com
 T: (780)849-3334
 F: (780)849-3266

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.