



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>MARGINAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id  
**OR126**  
Component  
**Diesel Engine**  
Fluid  
**SAE 0W40 (--- GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0105933</b>	GFL11330345	---
Sample Date		Client Info		<b>29 Feb 2024</b>	03 Aug 2017	---
Machine Age	hrs	Client Info		<b>6892</b>	3784	---
Oil Age	hrs	Client Info		<b>0</b>	540	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>22</b>	14	---
Chromium	ppm	ASTM D5185(m)	>20	<b>1</b>	1	---
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>4</b>	3	---
Lead	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---

**CONTAMINATION**











Light fuel dilution occurring.

Silicon	ppm	ASTM D5185(m)	>25	<b>9</b>	3	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	1	---
Fuel	%	ASTM D7593*	>5	<b>▲ 2.9</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.13	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.2</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>18.6</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	6	---
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	3	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)		<b>58</b>	1	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>933</b>	7	---
Calcium	ppm	ASTM D5185(m)		<b>1041</b>	2511	---
Phosphorus	ppm	ASTM D5185(m)		<b>1001</b>	1053	---
Zinc	ppm	ASTM D5185(m)		<b>1153</b>	1125	---
Sulfur	ppm	ASTM D5185(m)		<b>2633</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>17.3</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>▲ 12.1</b>	13.48	---

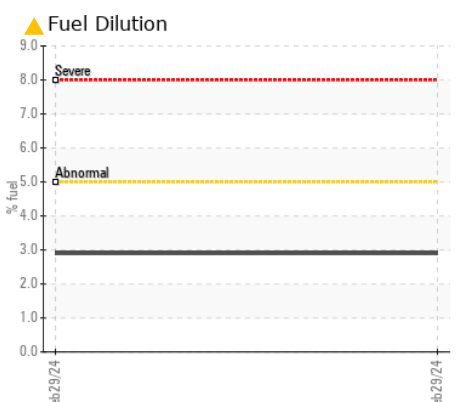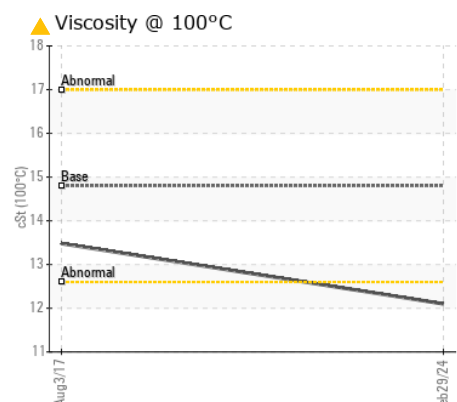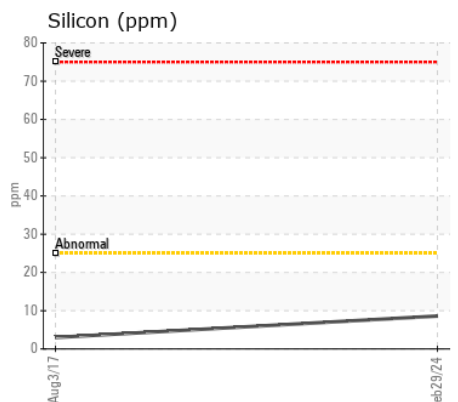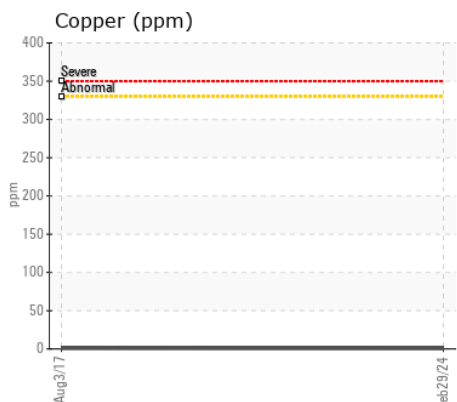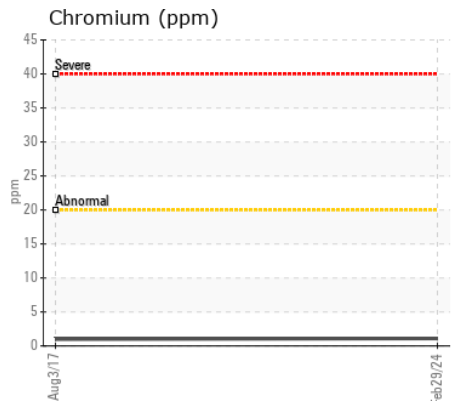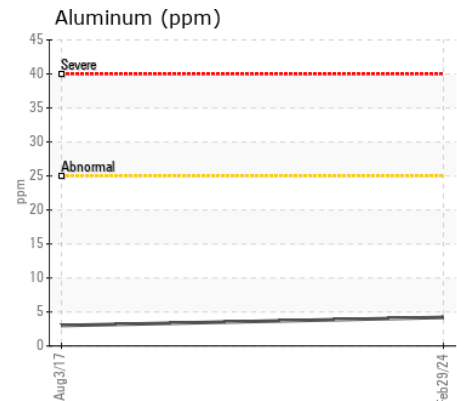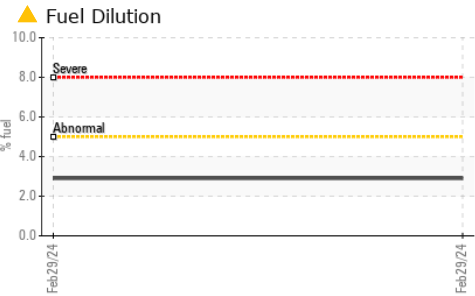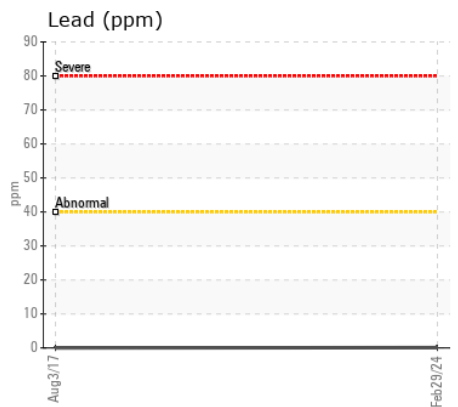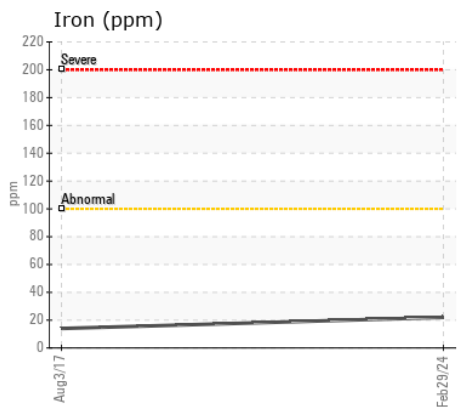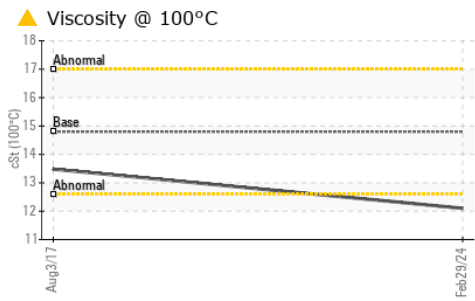

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0105933 **Received** : 01 Mar 2024  
**Lab Number** : 02619160 **Tested** : 04 Mar 2024  
**Unique Number** : 5736270 **Diagnosed** : 04 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 555 - Slave Lake**  
 240 Balsam Rd NE, P.O. 362  
 Slave Lake, AB  
 CA T0G 2A0  
 Contact: William Barker  
 wbarker@gflenv.com  
 T: (780)849-3334  
 F: (780)849-3266

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.