



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
120280-1216
Component
Diesel Engine
Fluid
PETRO CANADA SUPREME 5W30 (25 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281231	LH0276849	LH0186041
Sample Date		Client Info		24 Jan 2024	03 Nov 2023	05 May 2022
Machine Age	hrs	Client Info		8492	8000	5066
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	5	6	4
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	2	2	<1
Lead	ppm	ASTM D5185(m)	>30	<1	<1	0
Copper	ppm	ASTM D5185(m)	>125	1	2	1
Tin	ppm	ASTM D5185(m)	>5	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	7	7	8
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.2	10.3	9.3
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.4	21.4	23.2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	4	3
Boron	ppm	ASTM D5185(m)	186	29	19	73
Barium	ppm	ASTM D5185(m)	<1	0	0	0
Molybdenum	ppm	ASTM D5185(m)	79	54	58	20
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	578	1055	1099	391
Calcium	ppm	ASTM D5185(m)	1002	788	817	1625
Phosphorus	ppm	ASTM D5185(m)	745	991	1011	993
Zinc	ppm	ASTM D5185(m)	837	1129	1168	1129
Sulfur	ppm	ASTM D5185(m)	2502	2833	2883	2699
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.8	21.0	18.8
Visc @ 100°C	cSt	ASTM D7279(m)	11.42	11.4	11.3	13.2

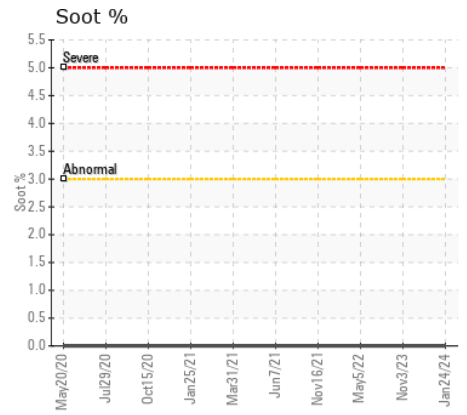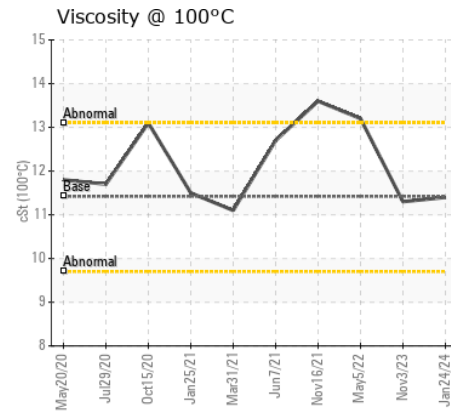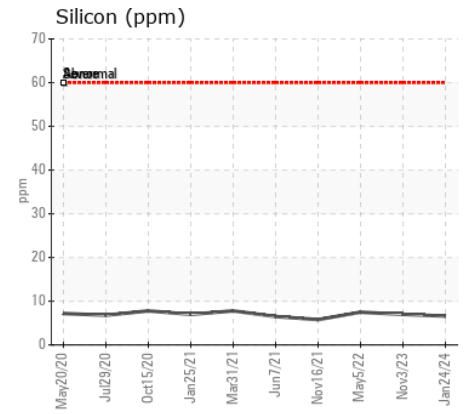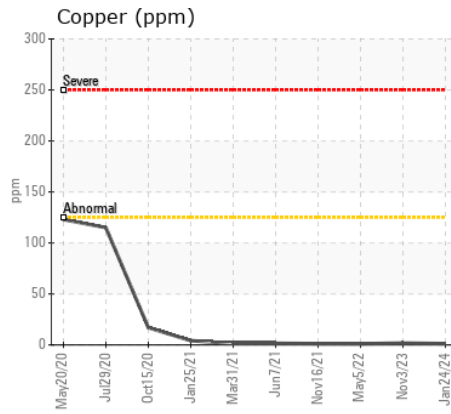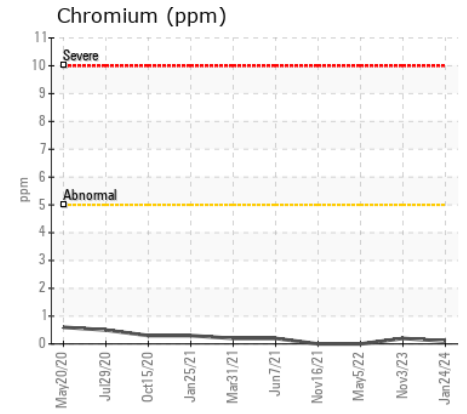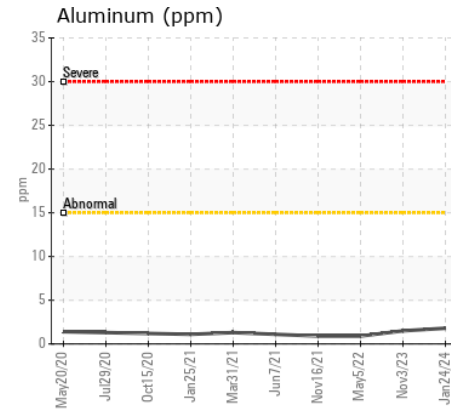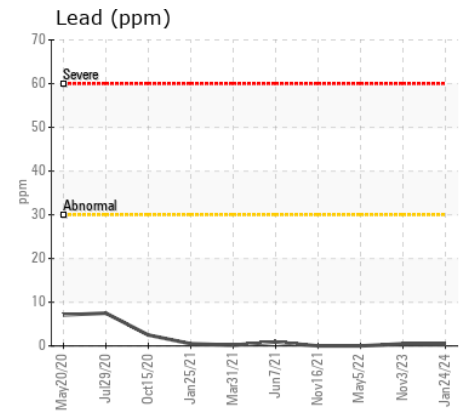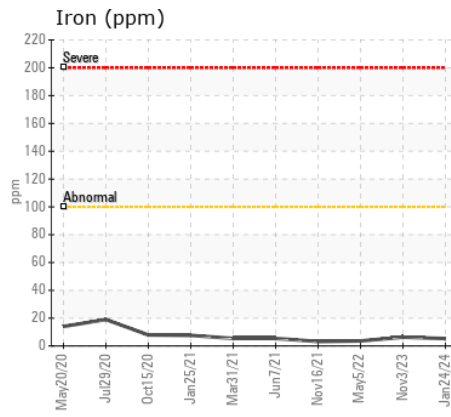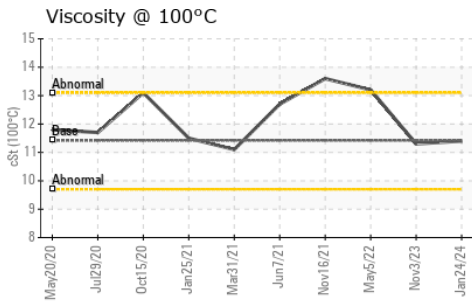

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0281231 **Received** : 01 Mar 2024
Lab Number : 02619189 **Tested** : 01 Mar 2024
Unique Number : 5736299 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : MOB 1

American Iron and Metal
 1273 Kelly Lake Rd.
 Sudbury, ON
 CA P3E 5P5
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: