



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WACKER SW28 WNCS0602CPUM00640
Component
Diesel Engine
Fluid
SAE 5W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0631035	---	---
Sample Date		Client Info		28 Feb 2024	---	---
Machine Age	hrs	Client Info		396	---	---
Oil Age	hrs	Client Info		5	---	---
Filter Age	hrs	Client Info		5	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	51	---	---
Chromium	ppm	ASTM D5185(m)	>20	8	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	9	---	---
Lead	ppm	ASTM D5185(m)	>40	<1	---	---
Copper	ppm	ASTM D5185(m)	>330	3	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	37	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	4.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.3	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		104	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		49	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		333	---	---
Calcium	ppm	ASTM D5185(m)		1843	---	---
Phosphorus	ppm	ASTM D5185(m)		979	---	---
Zinc	ppm	ASTM D5185(m)		1116	---	---
Sulfur	ppm	ASTM D5185(m)		2927	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	12.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.4	---	---

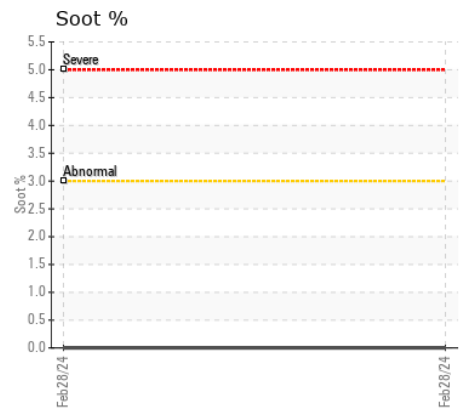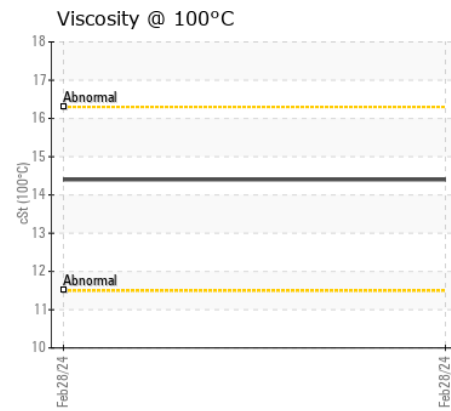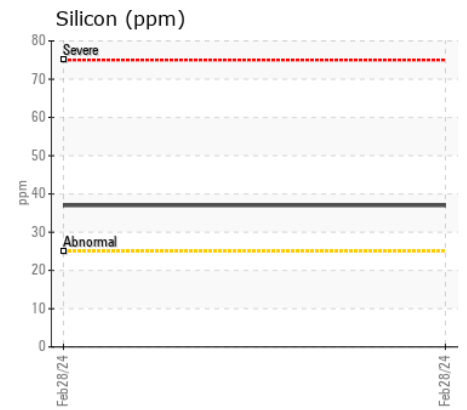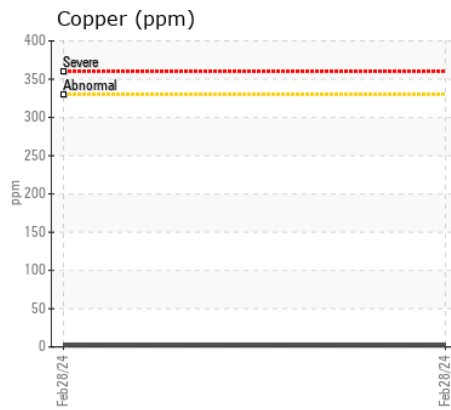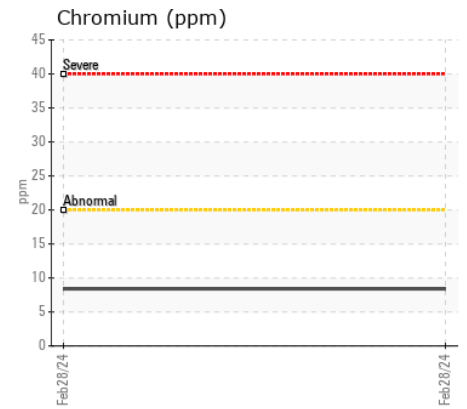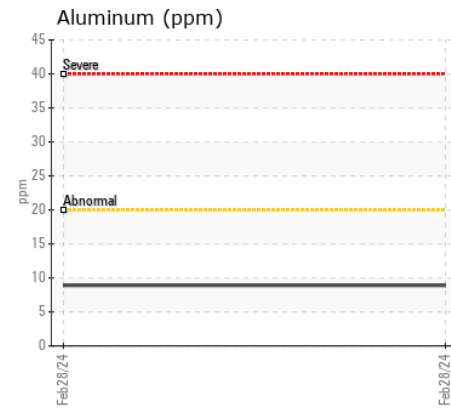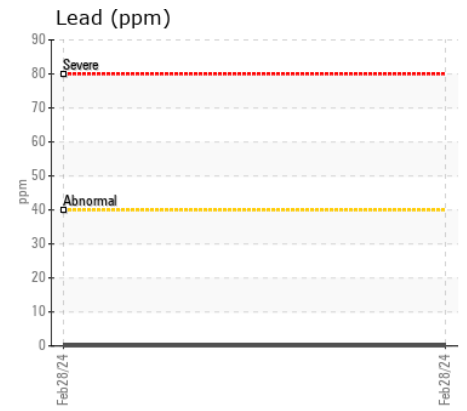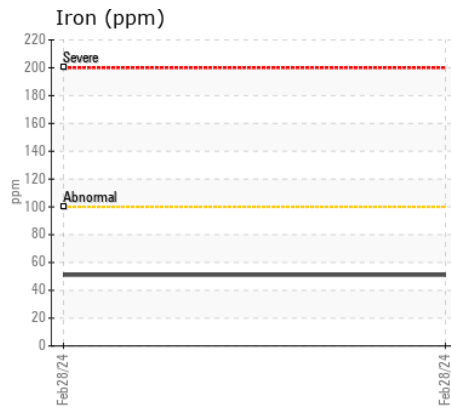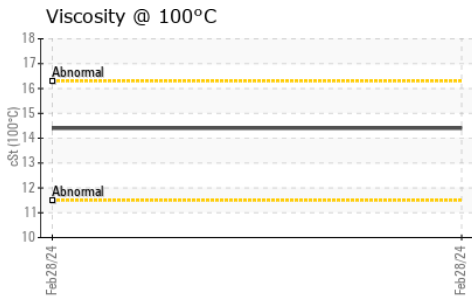

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0631035 **Received** : 01 Mar 2024
Lab Number : 02619190 **Tested** : 01 Mar 2024
Unique Number : 5736300 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : MOB 1

ONEIDA TRUCK & TRAILER LTD.
 634 4TH LINE
 CALEDONIA, ON
 CA N3W 2B3
 Contact: Bernard Nleberg
 bernard@oneidanewholland.com
 T: (905)765-5011
 F: (905)765-5842

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.