



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FINLEY JC07
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0072437	PC0027907	---
Sample Date		Client Info		22 Feb 2024	23 May 2023	---
Machine Age	hrs	Client Info		2767	2198	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	6	10	---
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	2	5	---
Lead	ppm	ASTM D5185(m)	>40	<1	<1	---
Copper	ppm	ASTM D5185(m)	>330	3	5	---
Tin	ppm	ASTM D5185(m)	>15	<1	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	3	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	ASTM D7844*	>3	0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	7.6	7.9	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.4	17.9	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>158	<1	1	---
Boron	ppm	ASTM D5185(m)	250	13	3	---
Barium	ppm	ASTM D5185(m)	10	0	0	---
Molybdenum	ppm	ASTM D5185(m)	100	55	60	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	450	877	964	---
Calcium	ppm	ASTM D5185(m)	3000	1160	1098	---
Phosphorus	ppm	ASTM D5185(m)	1150	1015	1099	---
Zinc	ppm	ASTM D5185(m)	1350	1159	1184	---
Sulfur	ppm	ASTM D5185(m)	4250	2761	2686	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.2	14.6	---
Visc @ 40°C	cSt	ASTM D7279(m)	115	93.7	92.7	---
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	12.8	12.7	---
Viscosity Index (VI)	Scale	ASTM D2270*	126	133	133	---

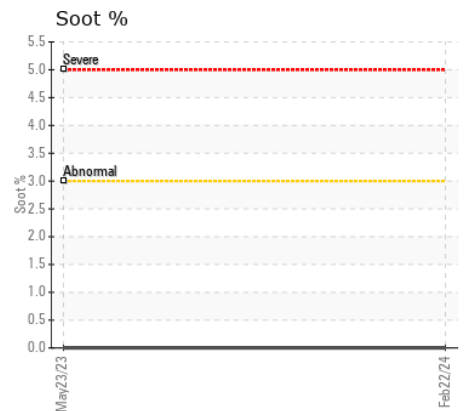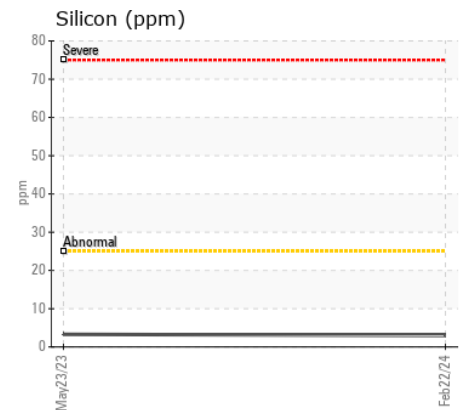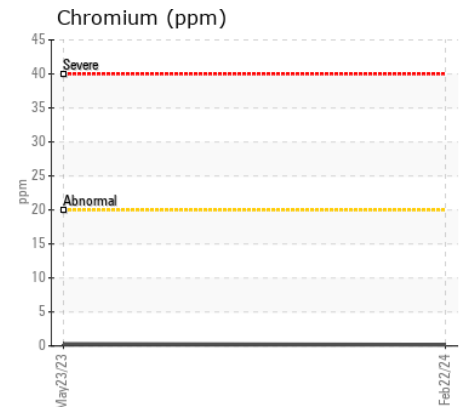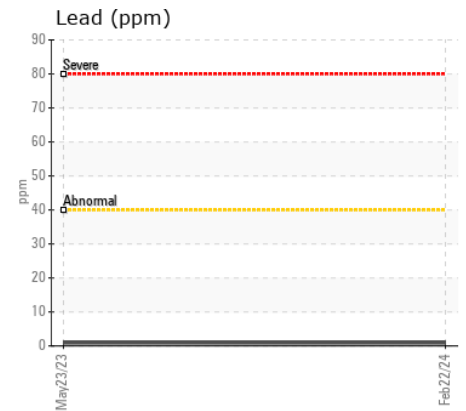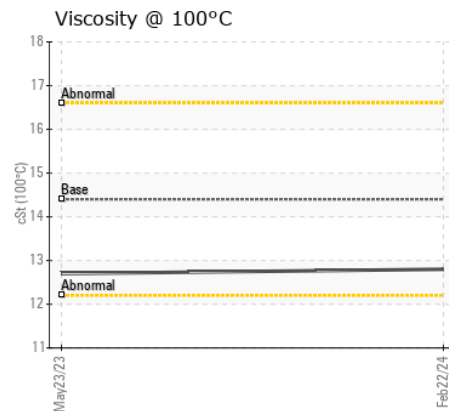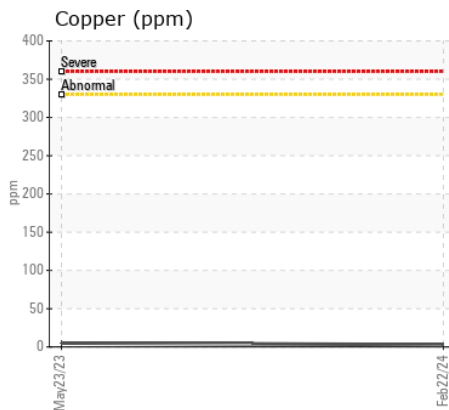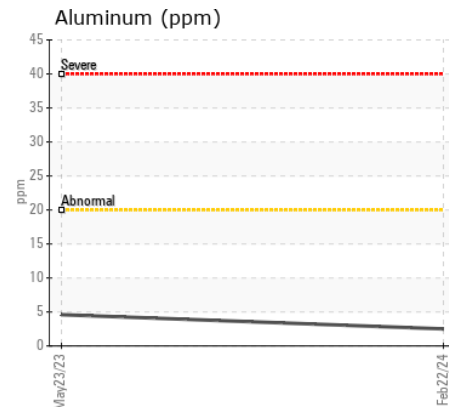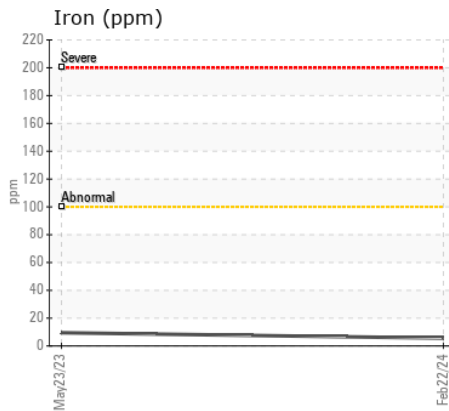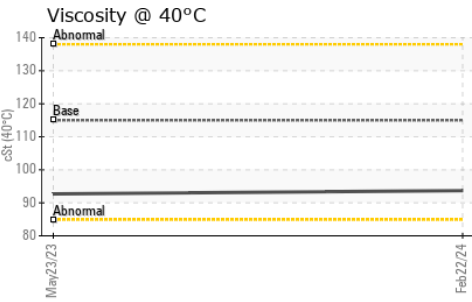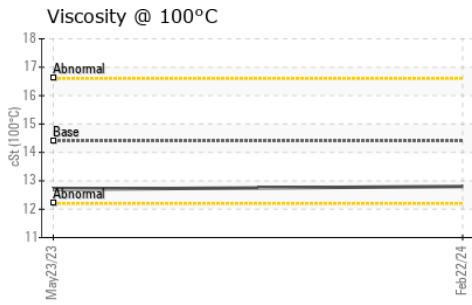

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Sample No. : PC0072437

Lab Number : 02619191

Unique Number : 5736301

Test Package : MOB 1 (Additional Tests: KV40, VI)

Received : 01 Mar 2024

Tested : 01 Mar 2024

Diagnosed : 01 Mar 2024 - Wes Davis

SKREENQUIP SALES

7801 VANTAGE WAY

DELTA, BC

CA V4G 1A6

Contact: Dan Hunting

parts@skreenquip.com

T: (604)940-8210

F: (604)940-8219

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.