



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	MARGINAL
FLUID CONDITION	NORMAL

Machine Id
TOYOPET
Component
Gasoline Engine
Fluid
MITASU 30 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868812	---	---
Sample Date		Client Info		29 Feb 2024	---	---
Machine Age	hrs	Client Info		90210	---	---
Oil Age	hrs	Client Info		26	---	---
Filter Age	hrs	Client Info		26	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				MARGINAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>150	10	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>40	2	---	---
Lead	ppm	ASTM D5185(m)	>50	1	---	---
Copper	ppm	ASTM D5185(m)	>155	5	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>30	10	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>4.0	▲ 2	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	15.2	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>400	3	---	---
Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		46	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		364	---	---
Calcium	ppm	ASTM D5185(m)		869	---	---
Phosphorus	ppm	ASTM D5185(m)		544	---	---
Zinc	ppm	ASTM D5185(m)		591	---	---
Sulfur	ppm	ASTM D5185(m)		1489	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	9.5	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		9.0	---	---

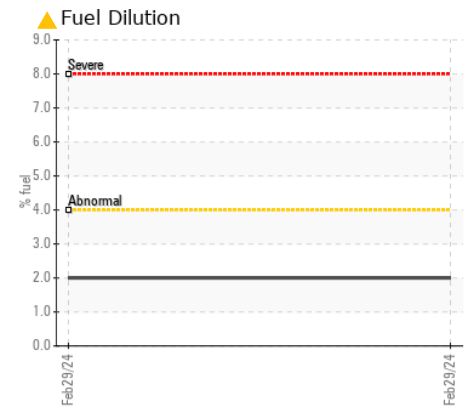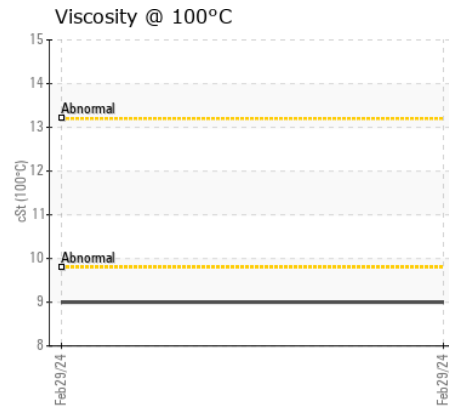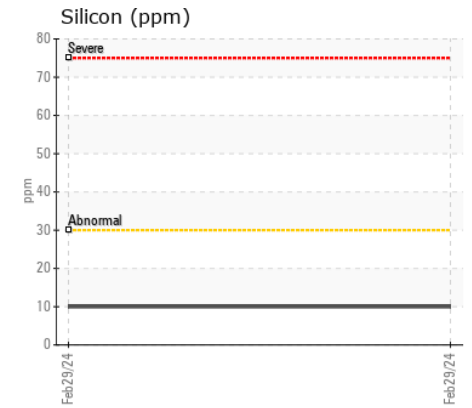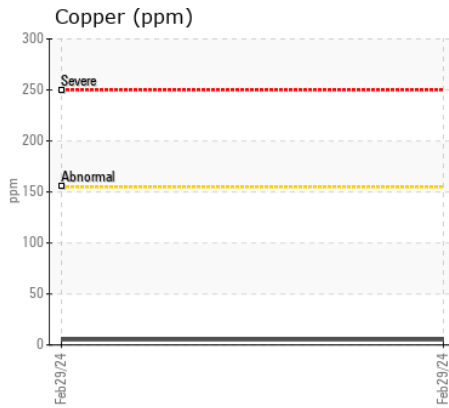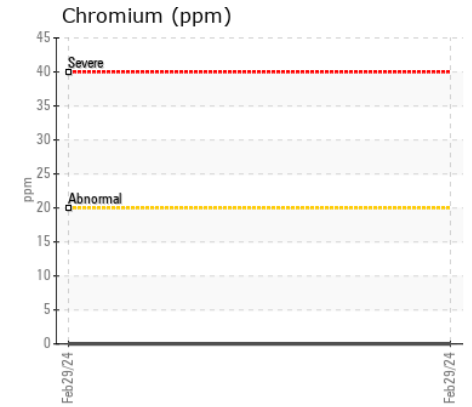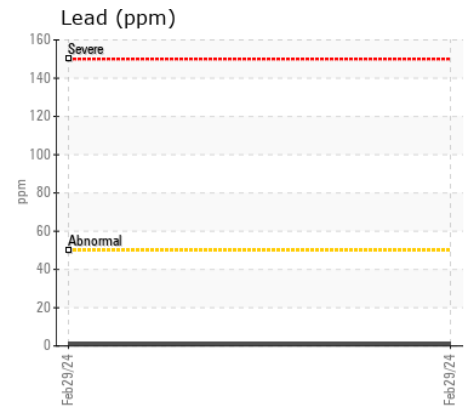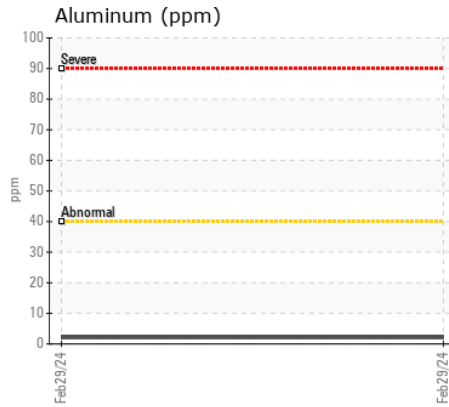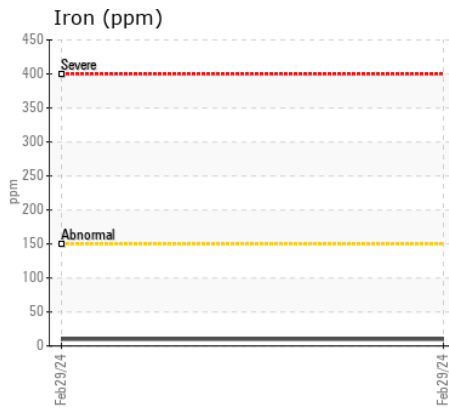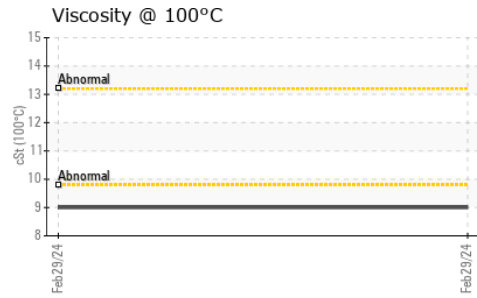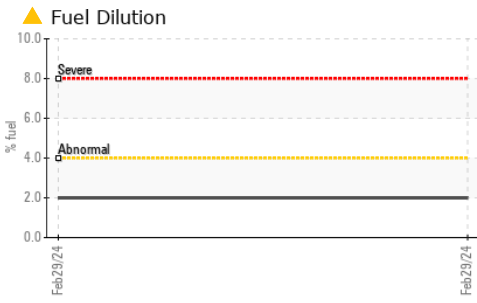

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0868812 **Received** : 01 Mar 2024
Lab Number : 02619255 **Tested** : 05 Mar 2024
Unique Number : 5736365 **Diagnosed** : 05 Mar 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: BottomAnalysis, FILTERPATCH, FuelDilution, PercentFuel)

PETER BAZINET
 547 Eliza Cres.
 Burlington, ON
 CA L7L 6E2
 Contact: Peter Bazinet
 peitre1@hotmail.com
 T: (905)802-2956
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.