



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(C-FAJR)
Machine Id
[C-FAJR] PIPER PA31-350 L-2001-68A
Component
Right Piston Aircraft Engine
Fluid
PHILLIPS 66 AVIATION X/C OIL SAE20W50 (12 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0838457	WC0826692	WC0826691
Sample Date		Client Info		26 Feb 2024	31 Oct 2023	28 Aug 2023
TSN	hrs	Client Info		0	0	0
TSO	hrs	Client Info		2852	2659	2507
Oil Age	hrs	Client Info		42	38	13
Filter Age	hrs	Client Info		42	38	13
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	29	28	19
Chromium	ppm	ASTM D5185(m)	>20	8	8	8
Nickel	ppm	ASTM D5185(m)	>15	10	9	6
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>5	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>25	6	4	4
Lead	ppm	ASTM D5185(m)	>20000	6805	6616	2583
Copper	ppm	ASTM D5185(m)	>25	5	5	6
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION





The water content is negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	5	4	8
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water	%	ASTM D6304*	>0.1	0.027	0.010	---
ppm Water	ppm	ASTM D6304*	>1000	271	104.8	---
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	NONE	VLITE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	.2%	.2%	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Boron	ppm	ASTM D5185(m)	0.0	0	<1	<1
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	<1
Manganese	ppm	ASTM D5185(m)	0.0	0	0	0
Magnesium	ppm	ASTM D5185(m)	0.0	6	3	2
Calcium	ppm	ASTM D5185(m)	4.7	3	<1	<1
Phosphorus	ppm	ASTM D5185(m)	0.0	0	0	0
Zinc	ppm	ASTM D5185(m)	0.1	3	2	3
Sulfur	ppm	ASTM D5185(m)	848	1051	1057	927
Visc @ 100°C	cSt	ASTM D7279(m)	20.2	22.4	21.4	21.3

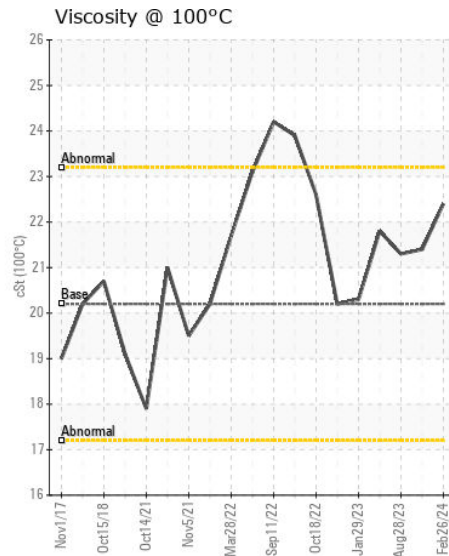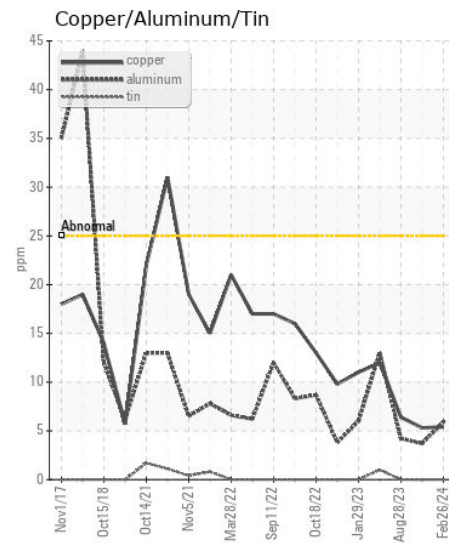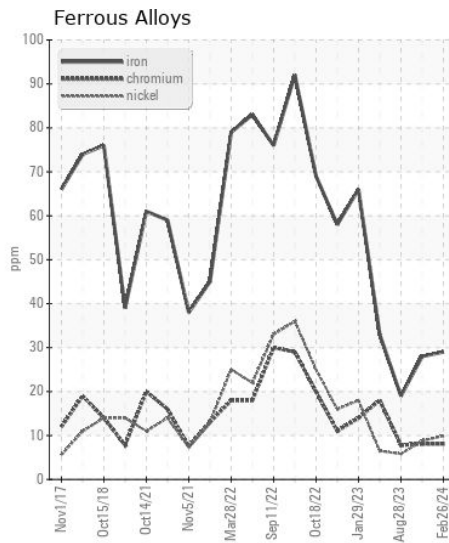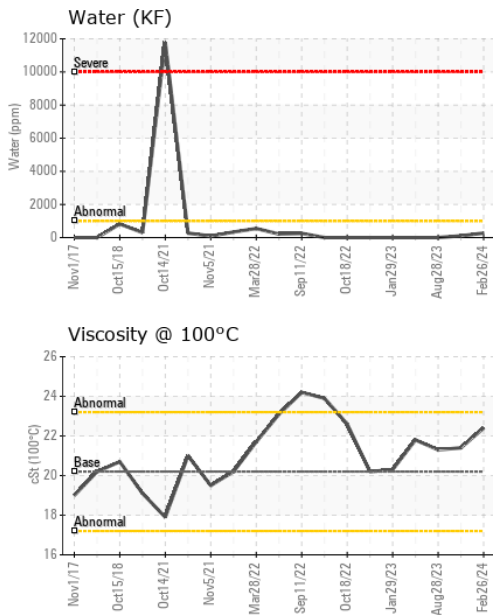

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0838457
Lab Number : 02619256
Unique Number : 5736366
Test Package : AVI 1 (Additional Tests: KF)

Received : 01 Mar 2024
Tested : 02 Mar 2024
Diagnosed : 04 Mar 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

SKYCAR AIR AMBULANCE
 BOX 289, 17 AIRPORT ROAD
 SIOUX LOOKOUT, ON
 CA P8T 1A3
 Contact: Jason Murphy
 prm@skycare.ca
 T: (807)737-0039
 F: (807)737-0040