



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
(359465)
Machine Id
LIEBHERR L556 064990-1757
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX XV ALL SEASON HYDRAULIC OIL (200 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | LH0250654 | LH0276894 | LH0223953 |
| Sample Date | | Client Info | | 11 Jan 2024 | 24 Oct 2023 | 02 Nov 2022 |
| Machine Age | hrs | Client Info | | 9970 | 9023 | 5008 |
| Oil Age | hrs | Client Info | | 0 | 0 | 0 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Not Changd | Not Changd | Not Changd |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|---------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185(m) | >20 | 9 | 9 | 9 |
| Chromium | ppm | ASTM D5185(m) | >10 | 8 | 8 | 6 |
| Nickel | ppm | ASTM D5185(m) | >10 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185(m) | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185(m) | | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185(m) | >10 | 2 | 2 | 2 |
| Lead | ppm | ASTM D5185(m) | >10 | 6 | 7 | 5 |
| Copper | ppm | ASTM D5185(m) | >75 | 3 | 3 | 3 |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | | 0 | 0 | 0 |
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

| | | | | | | |
|------------------|--------|---------------|-----------|-----------------|---------|----------|
| Silicon | ppm | ASTM D5185(m) | >20 | 3 | 3 | 4 |
| Potassium | ppm | ASTM D5185(m) | >20 | 1 | <1 | <1 |
| Water | | WC Method | >0.1 | NEG | NEG | NEG |
| Particles >4µm | | ASTM D7647 | >20000 | 2102 | 619 | 1705 |
| Particles >6µm | | ASTM D7647 | >5000 | 409 | 61 | 204 |
| Particles >14µm | | ASTM D7647 | >640 | 11 | 4 | 12 |
| Particles >21µm | | ASTM D7647 | >160 | 2 | 2 | 4 |
| Particles >38µm | | ASTM D7647 | >40 | 1 | 1 | 0 |
| Particles >71µm | | ASTM D7647 | >10 | 0 | 1 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >21/19/16 | 18/16/11 | 16/13/9 | 18/15/11 |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.1 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|---------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185(m) | | <1 | 1 | 2 |
| Boron | ppm | ASTM D5185(m) | 0 | 0 | <1 | 1 |
| Barium | ppm | ASTM D5185(m) | 0 | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 1 | 0 | 0 | <1 |
| Magnesium | ppm | ASTM D5185(m) | 0 | 2 | 2 | 3 |
| Calcium | ppm | ASTM D5185(m) | 100 | 432 | 503 | 975 |
| Phosphorus | ppm | ASTM D5185(m) | 670 | 649 | 645 | 663 |
| Zinc | ppm | ASTM D5185(m) | 850 | 775 | 779 | 716 |
| Sulfur | ppm | ASTM D5185(m) | 1600 | 2495 | 2472 | 3397 |
| Visc @ 40°C | cSt | ASTM D7279(m) | 47.9 | 45.6 | 45.4 | 41.5 |

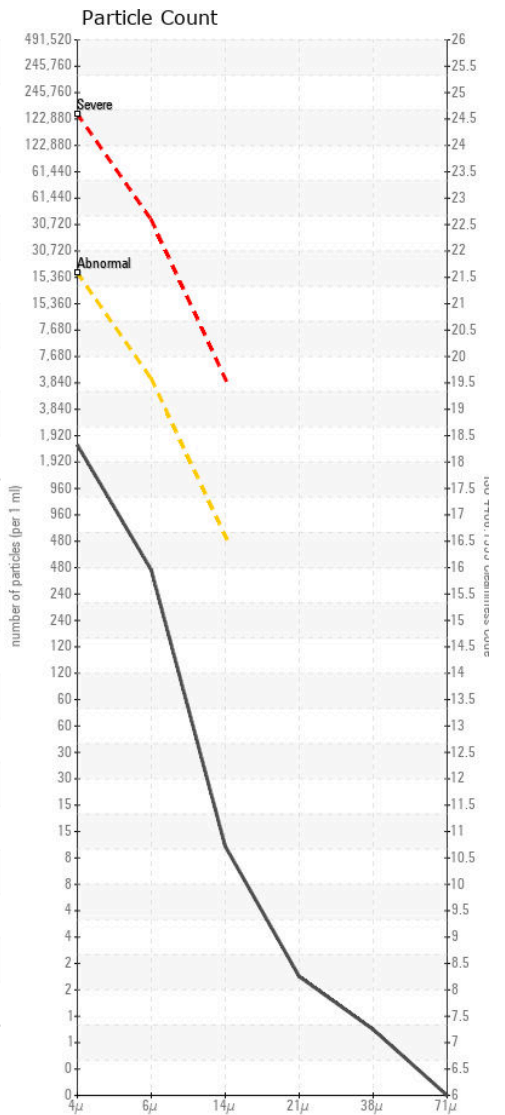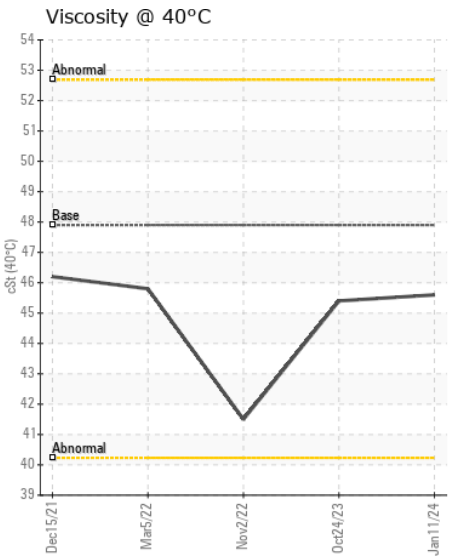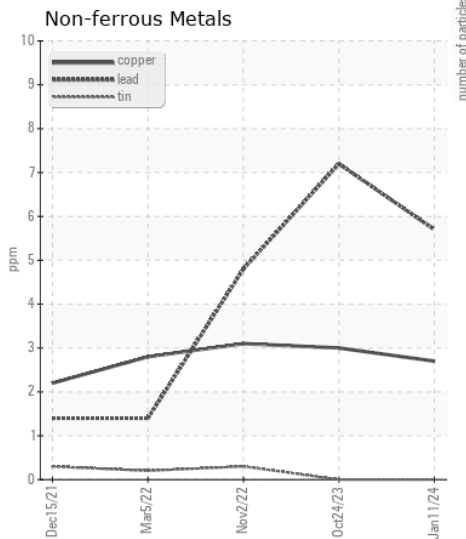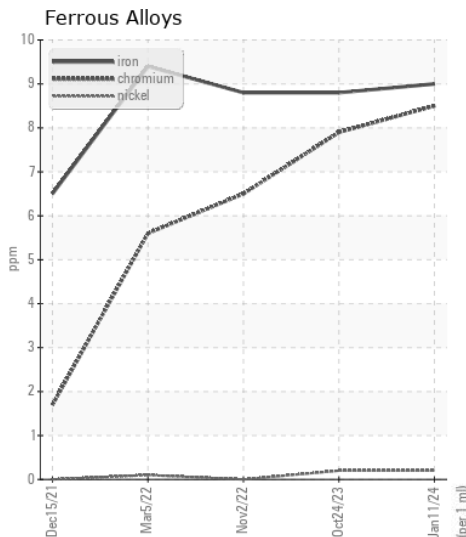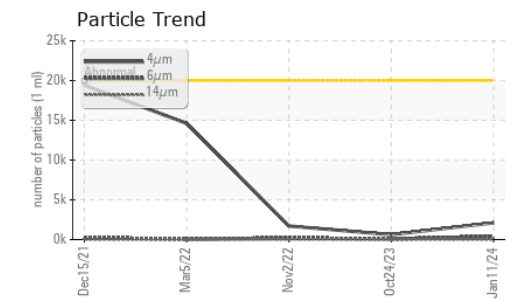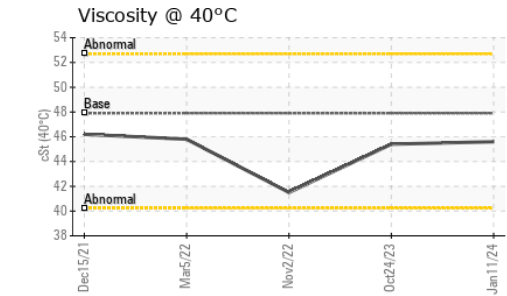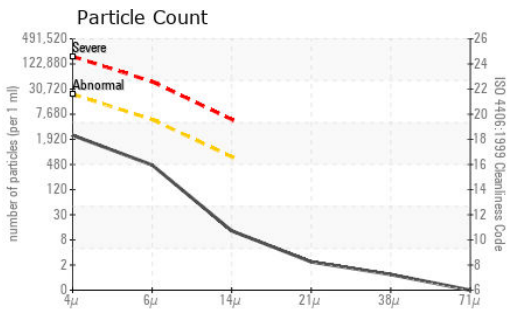

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0250654 **Received** : 01 Mar 2024
Lab Number : 02619307 **Tested** : 02 Mar 2024
Unique Number : 5736417 **Diagnosed** : 02 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PrtCount)

Eacom Timber Corporation
 100 Old Nairn Centre Road
 Nairn Centre, ON
 CA P0M 2L0
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: