



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FINLEY JC07

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid.

WEAR

All component wear rates are normal.











CONTAMINATION

There is no indication of any contamination in the component(unconfirmed).

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0072867	PC0027917	---
Sample Date		Client Info		29 Feb 2024	23 May 2023	---
Machine Age	hrs	Client Info		2767	2198	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185(m)	>20	2	1	---
Chromium	ppm	ASTM D5185(m)	>10	0	0	---
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>10	<1	0	---
Lead	ppm	ASTM D5185(m)	>10	<1	<1	---
Copper	ppm	ASTM D5185(m)	>75	2	2	---
Tin	ppm	ASTM D5185(m)	>10	0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>20	<1	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		0	0	---
Boron	ppm	ASTM D5185(m)	5	<1	1	---
Barium	ppm	ASTM D5185(m)	5	0	0	---
Molybdenum	ppm	ASTM D5185(m)	5	0	<1	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	25	4	4	---
Calcium	ppm	ASTM D5185(m)	200	58	58	---
Phosphorus	ppm	ASTM D5185(m)	300	290	305	---
Zinc	ppm	ASTM D5185(m)	370	345	337	---
Sulfur	ppm	ASTM D5185(m)	2500	2033	1938	---
Visc @ 40°C	cSt	ASTM D7279(m)	46	44.5	44.4	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	6.8	6.8	---
Viscosity Index (VI)	Scale	ASTM D2270*	97	107	107	---

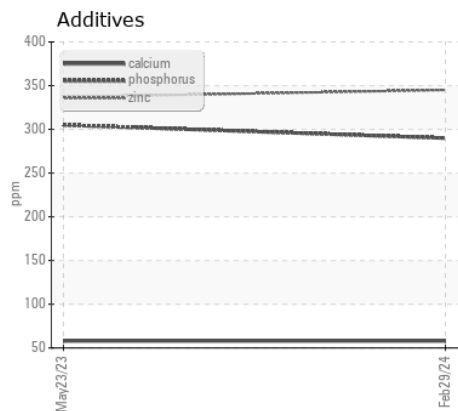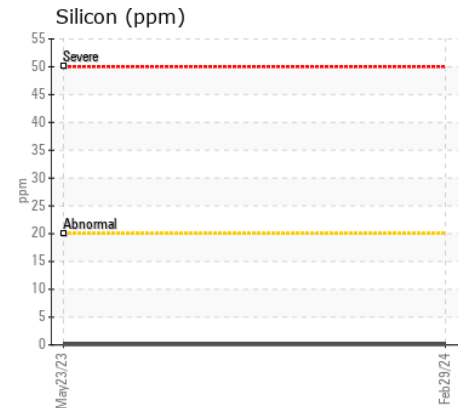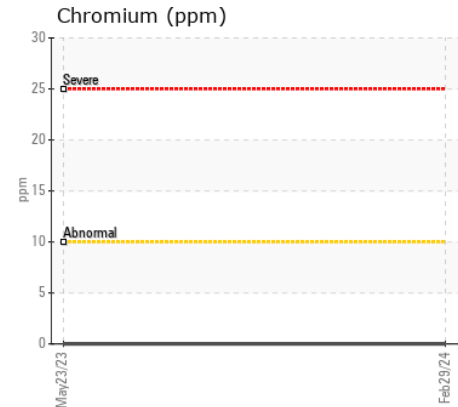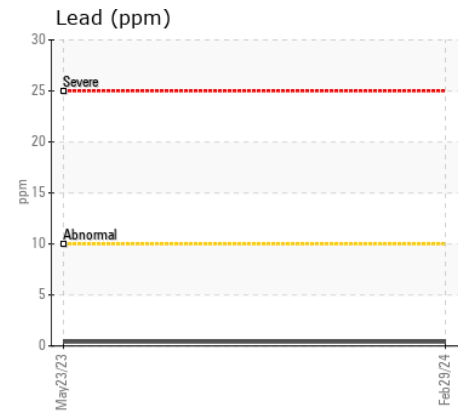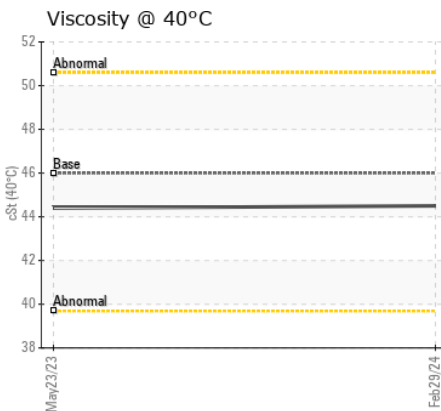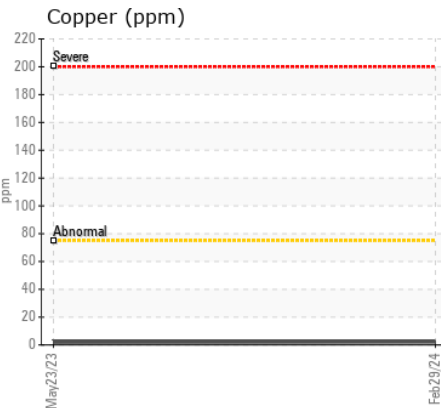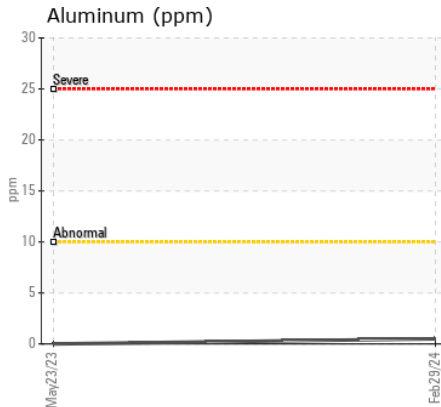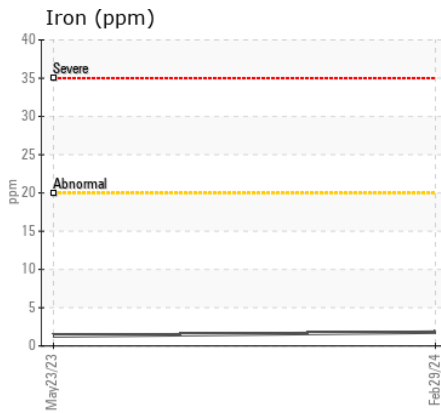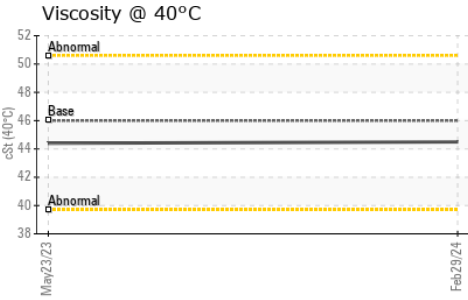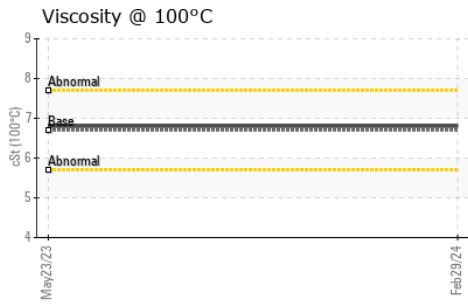

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0072867 **Received** : 01 Mar 2024
Lab Number : 02619309 **Tested** : 01 Mar 2024
Unique Number : 5736419 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

SKREENQUIP SALES
 7801 VANTAGE WAY
 DELTA, BC
 CA V4G 1A6
 Contact: Dan Hunting
 parts@skreenquip.com
 T: (604)940-8210
 F: (604)940-8219