



POWER SYSTEMS
SYSTÈMES DE PUISSANCE

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[6100267897]

Machine Id
6610399222

Component
Transmission (Auto)

Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indique que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

WEAR

Les taux d'usure de tous les composants sont normaux.












CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

Le AN est acceptable pour ce fluide. L'état de le fluide permet d'en prolonger l'utilisation.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WA0018836	---	---
Sample Date		Client Info		27 Feb 2024	---	---
Machine Age	kms	Client Info		10309	---	---
Oil Age	kms	Client Info		0	---	---
Filter Age	kms	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
PQ		ASTM D8184*	>100	6	---	---
Iron	ppm	ASTM D5185(m)	>300	59	---	---
Chromium	ppm	ASTM D5185(m)	>2	0	---	---
Nickel	ppm	ASTM D5185(m)	>4	<1	---	---
Titanium	ppm	ASTM D5185(m)	>3	0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>70	23	---	---
Lead	ppm	ASTM D5185(m)	>85	11	---	---
Copper	ppm	ASTM D5185(m)	>90	8	---	---
Tin	ppm	ASTM D5185(m)	>10	3	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>20	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185(m)		21	---	---
Boron	ppm	ASTM D5185(m)		70	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		100	---	---
Phosphorus	ppm	ASTM D5185(m)		223	---	---
Zinc	ppm	ASTM D5185(m)		5	---	---
Sulfur	ppm	ASTM D5185(m)		1230	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		1.16	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	33.9	---	---

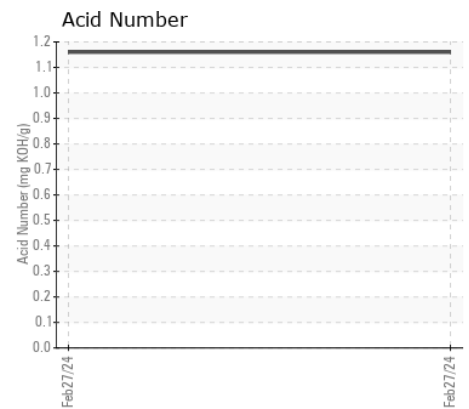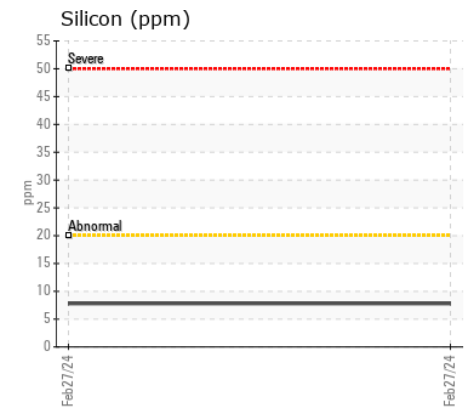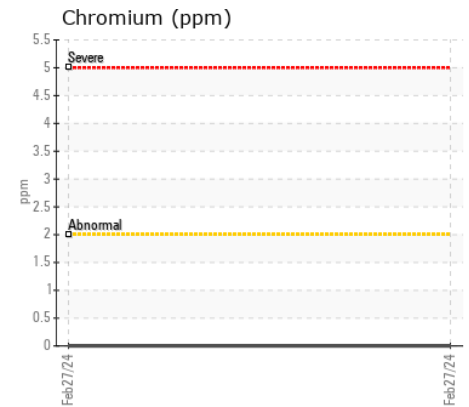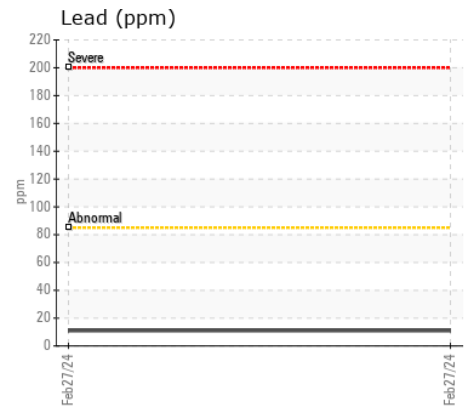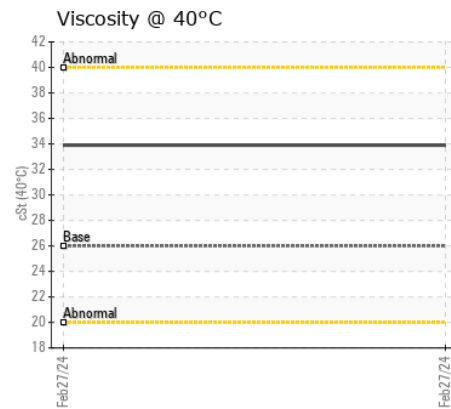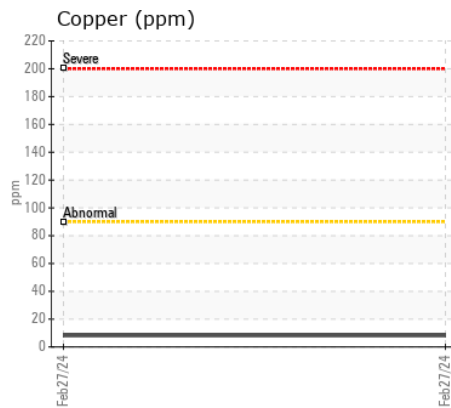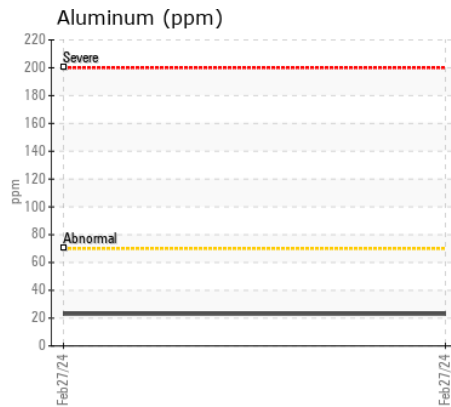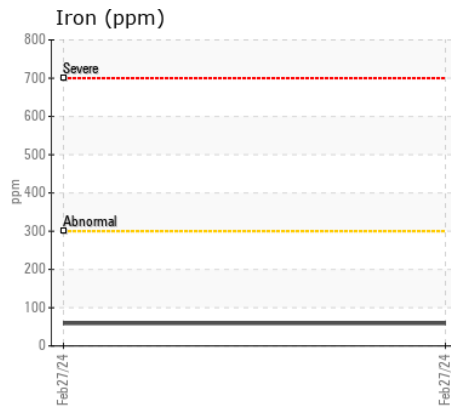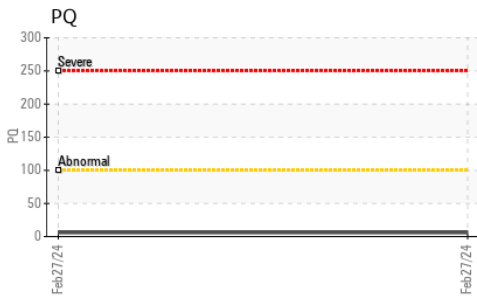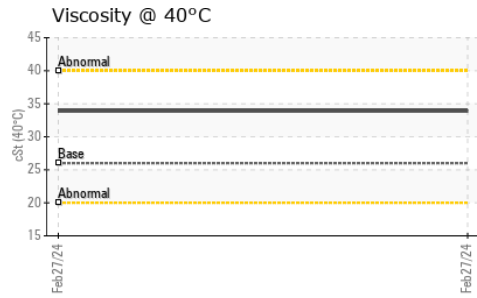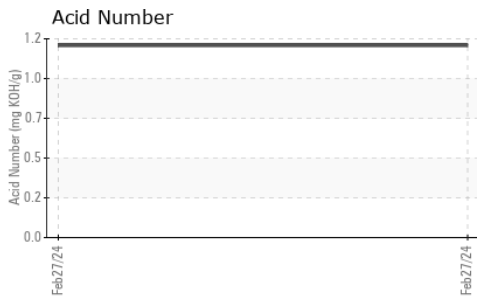

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0018836 **Received** : 01 Mar 2024
Lab Number : 02619320 **Tested** : 02 Mar 2024
Unique Number : 5736430 **Diagnosed** : 02 Mar 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: PQ, TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Wajax Power Systems
 1080 Rue Jules-Brisebois
 Val D'Or, QC
 CA J9P 6X4
 Contact: Luc Laflamme
 llaflamme@wajax.com
 T: (819)874-2552
 F: (819)874-8995